


**Accession:** The United States Government furnishes these data and the recipient accepts and uses them with the express understanding that the data are not to be used for any purpose other than that for which they were originally prepared, and that the user is responsible for the results of any use of the data for other than its intended purpose.

**Accuracy:** The data were collected using the best available methods and equipment at the time of collection. The user is responsible for the results of any use of the data for other than its intended purpose.


**Disclaimer:** The information depicted on this map represents the results of a survey conducted on the ground. The information is not to be used for any purpose other than that for which it was originally prepared, and the user is responsible for the results of any use of the data for other than its intended purpose.

U.S. ARMY CORPS OF ENGINEERS NEW ORLEANS DISTRICT		
Submitted:	Surveyed By: PM, JS	Checked By: AO/JH
Recommended:	Plotted By: BD	
Approved:	Chief Survey Section	Chief Waterways Maintenance Section

**MISS. RIVER OUTLETS AT VENICE  
BAPTISTE COLLETTE, MI. 2.1 TO 3.6**  
OV\_02\_BAP\_20240403\_CS  
03 April 2024

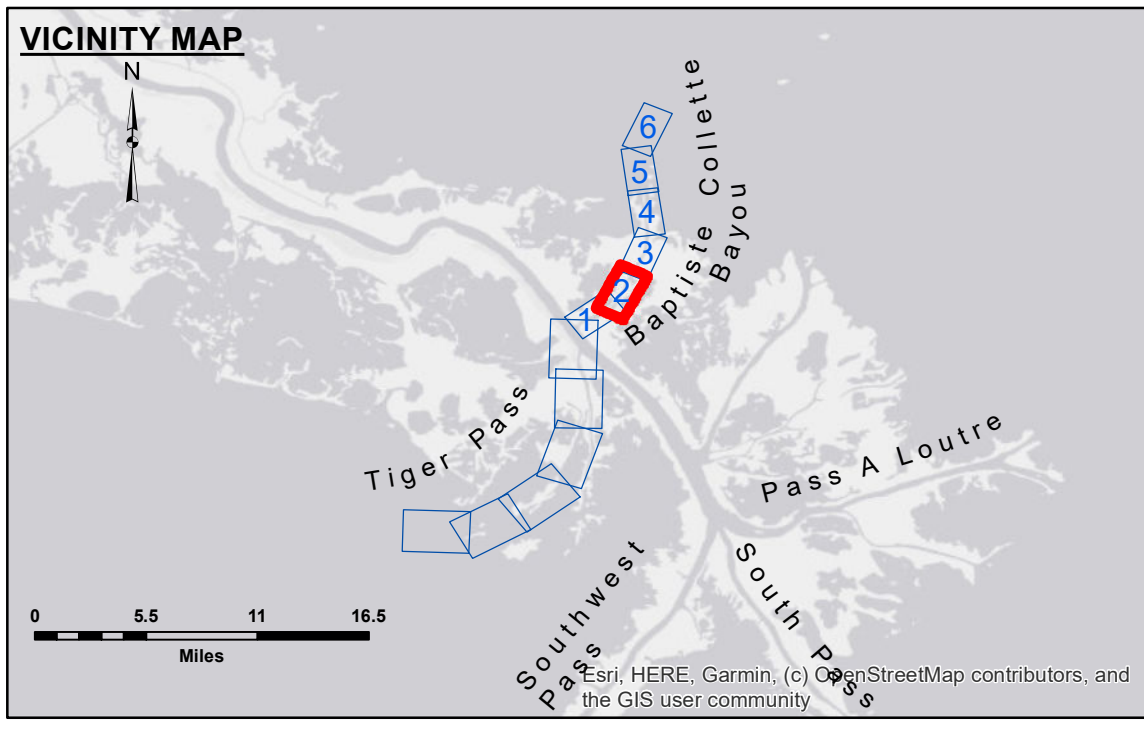

LEGEND			
--- Federal Navigation Channel	○ Cable Area	□ Borrow Area	■ -7.5' and above
— Federal Navigation Center Line	□ Placement Area	● Shoalest Sounding**	■ -7.5' to -11.5'
— As-built Pipeline/Cable	□ Anchorage Area	☆ Beacon, General	■ -11.5' to -13.5'
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point	◆ Red Navigation Buoy	■ -13.5' to -15.5'
— Project Depth Contour	⚓ Wrecks-Submerged	◆ Green Navigation Buoy	■ -15.5' to -19.5'
			■ -19.5' and below

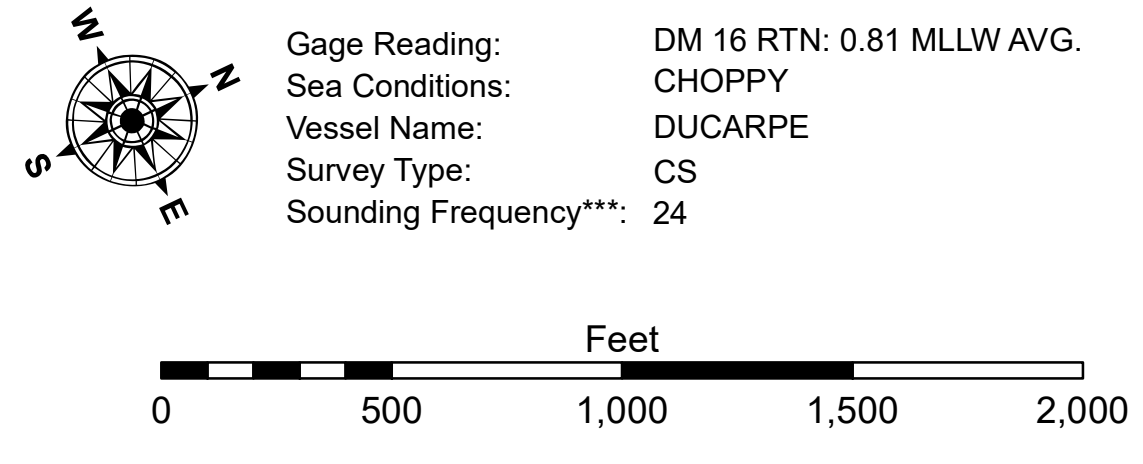

**NOTES:**  
Horizontal Coordinate System:  
North American Datum of 1983 (NAD83), projected to the State Plane  
Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum:  
Soundings are shown in feet and indicate depths below Mean Lower Low Water Datum (MLLW).  
Datum relationships as of April 2023:  
0.0' NAVD88 (2009.55) = -0.51' MLLW (2002-2006) = 2.99' MLG

Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.

The location of navigation aids are base on and provided by the U.S. Coast Guard.

2018 Aerial Photography data source: Precision Aerial Reconnaissance LLC.

Reference is N.O.A. Navigation Chart No. 11353.

\*\* Shoalest Sounding per Quarter per Reach.

\*\*\* High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

Sheet Reference Number  
**2 of 6**

Revision Number:  
4.2-20240420