


DISCLAIMER: The United States Government furnishes these data and the recipient accepts and uses them with the express understanding that they are not to be used for any purpose other than that for which they were prepared, and that the Government makes no warranty, expressed or implied, concerning the accuracy, completeness, reliability, suitability or availability for any particular purpose of the information furnished hereunder. The recipient may not transfer these data to others without the written consent of the United States Government. The information depicted on this map represents the results of a survey conducted on or about the date indicated in the legend. The recipient is responsible for determining the hydrographical conditions which develop after the date of the survey and for making any necessary adjustments to the data to represent the general condition existing at that time.

U.S. ARMY CORPS OF ENGINEERS NEW ORLEANS DISTRICT		
Submitted:	Surveyed By:	Checked By:
Recommended:	PM/LLT	AO/JH
Approved:	Plotted By:	
	BD	

**MISS. RIVER OUTLETS AT VENICE
BAPTISTE COLLETTE, MI. 2.1 TO 3.6
OV_02_BAP_20250213_BD
13 February 2025**

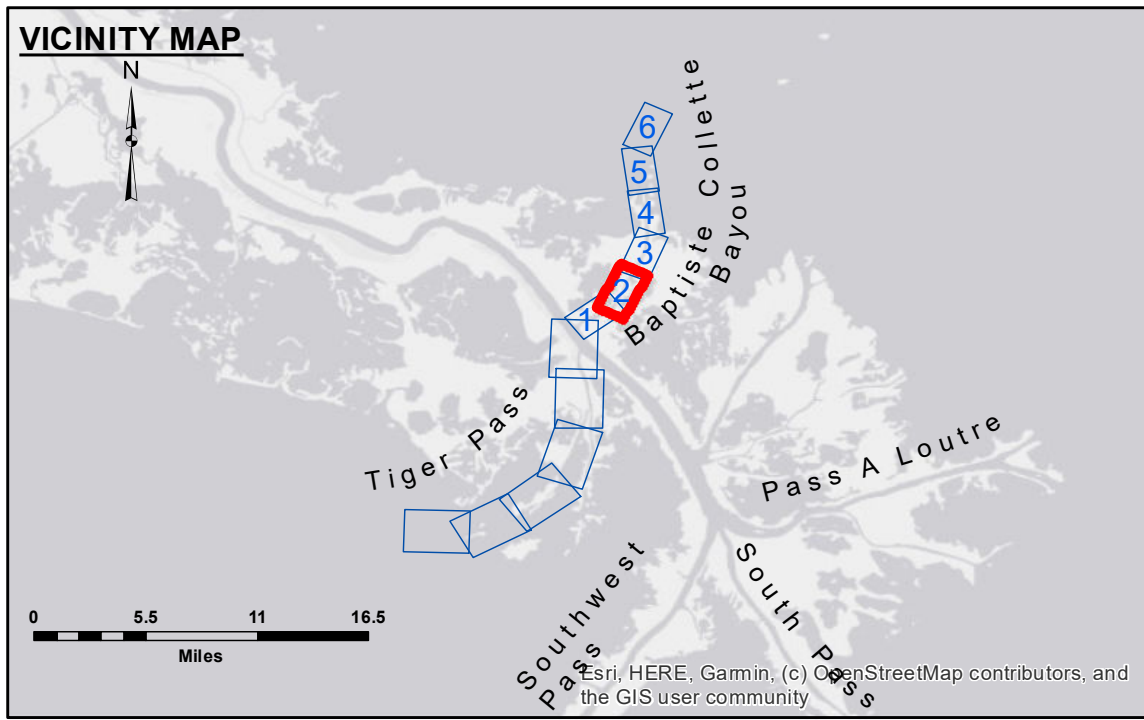

LEGEND	
--- Federal Navigation Channel	○ Cable Area
— Federal Navigation Center Line	□ Placement Area
— As-built Pipeline/Cable	□ Anchorage Area
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point
— Project Depth Contour	✶ Wrecks-Submerged
□ Borrow Area	☆ Beacon, General
● Shoalest Sounding**	◆ Red Navigation Buoy
◆ Beacons, General	◆ Green Navigation Buoy
■ -7.5' and above	
■ -7.5' to -11.5'	
■ -11.5' to -13.5'	
■ -13.5' to -15.5'	
■ -15.5' to -19.5'	
■ -19.5' and below	

NOTES:

Horizontal Coordinate System:
North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum:
Soundings are shown in feet and indicate depths below Mean Lower Low Water Datum (MLLW). Datum relationships as of April 2023:
0.0' NAVD83 (2009.55) = -0.51' MLLW (2002-2006) = 2.99' MLG

Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.

The location of navigation aids are based on and provided by the U.S. Coast Guard.
2018 Aerial Photography data source: Precision Aerial Reconnaissance LLC.

Reference is N.O.A.A. Navigation Chart No. 11353.
** Shoalest Sounding per Quarter per Reach.

*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

Gage Reading: RTN: 0.0 MLLW AVG.
Sea Conditions: CALM
Vessel Name: OB-169
Survey Type: BD
Sounding Frequency***: 24

Scale: 0 to 2,000 Feet

Sheet Reference Number
2 of 6

Revision Number:
4.2-202/064.20