


US Army Corps  
of Engineers  
District: CEMVN

**DISCLAIMER:** The data represents the results of data collection/processing for a specific Army Corps of Engineers active and inactive waterway. The general existing conditions, reliability, utility or suitability for any particular purpose of the data furnished. The Corps shall be responsible for any damage resulting from the use of any information or data furnished. The Corps does not guarantee the accuracy of the data or its interpretation. The user agrees not to represent these data as other than Government provided data. The user may transfer this document without also transferring this Disclaimer.




**Data Constraints:** Hydrographic survey data is subject to change due to new surveys including but not limited to dredging activities, changes in river bed material, and changes in the hydrographic conditions which develop after the date of publication. The data is intended for engineering purposes only and is not to be used for navigation.

**Information:** The information depicted on this map represents the results of a survey conducted on the date indicated and can only be considered valid for the period of time indicated at the time of survey. The general conditions existing at the time of survey are not necessarily reflected in the hydrographic data.

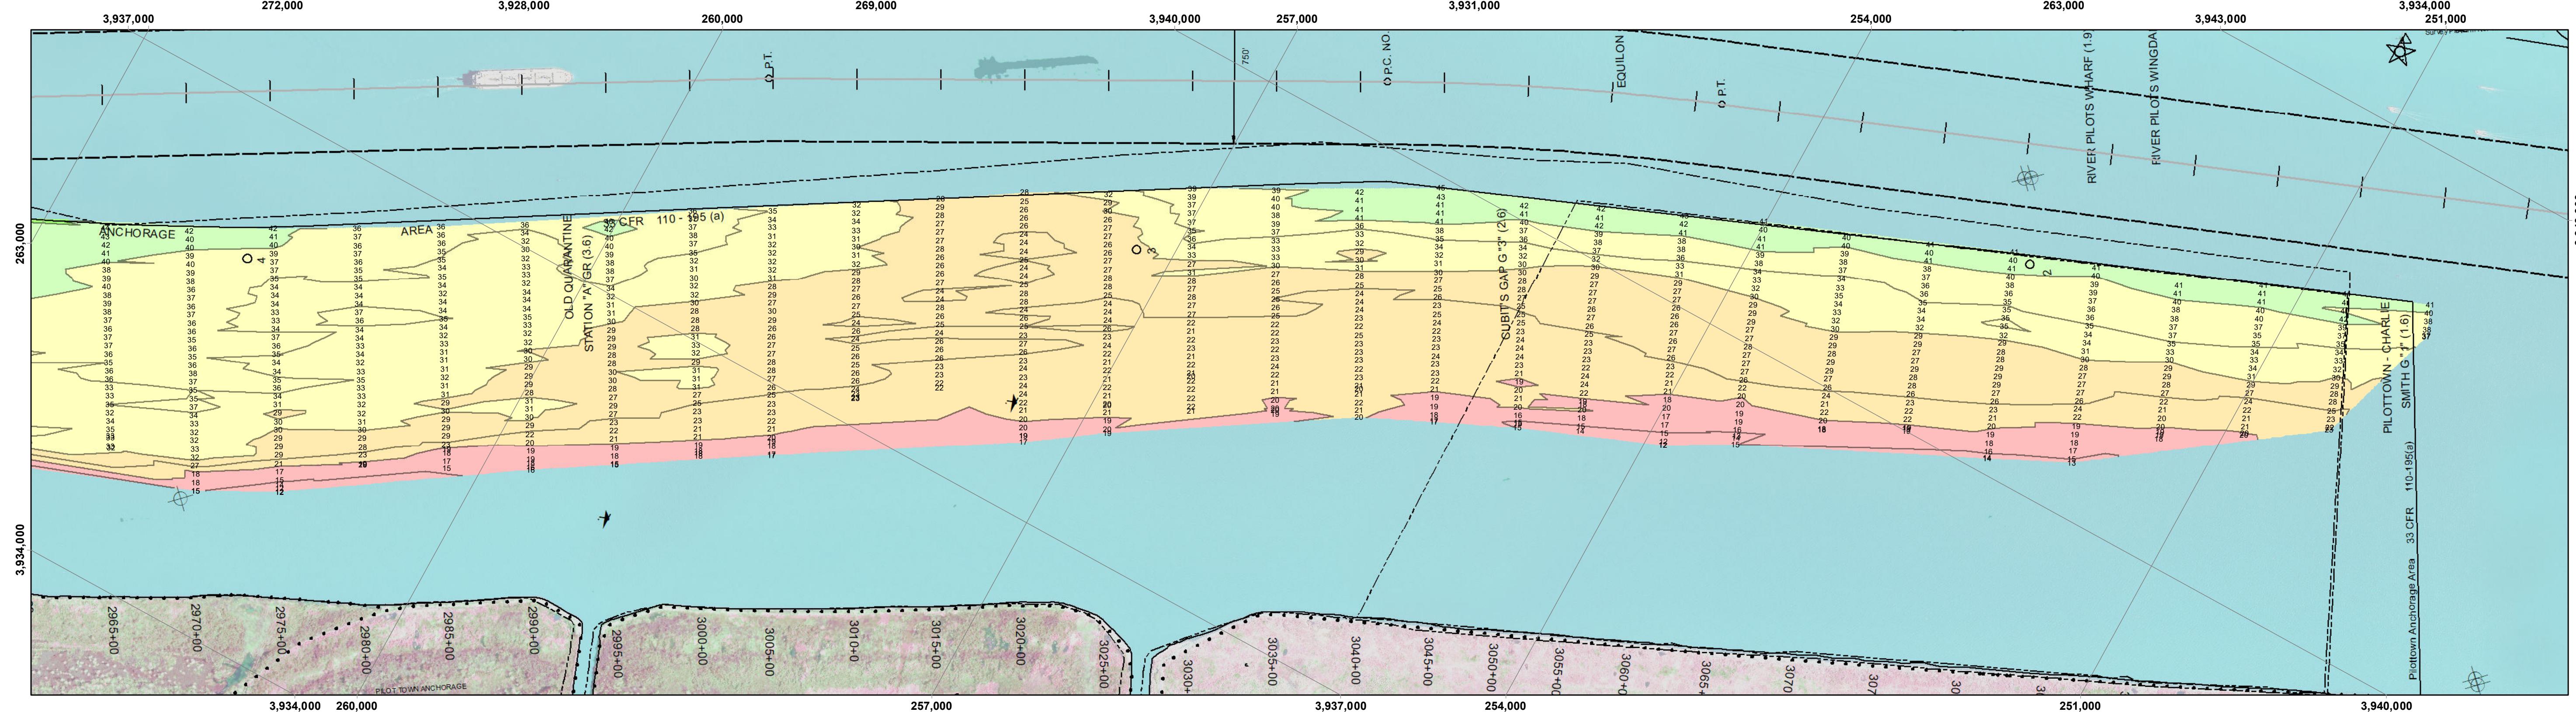

U.S. ARMY CORPS OF ENGINEERS	
NEW ORLEANS DISTRICT	
Surveyed by:	SURVEY CREW
Submitted:	
Recommended:	One I Survey Section
Approved:	One I Waterways Maintenance Section

**MISSISSIPPI RIVER - B.R. TO GULF**  
**PILOTTOWN ANCHORAGE**  
**SW\_00\_PTA\_20201216\_CS**  
16 December 2020

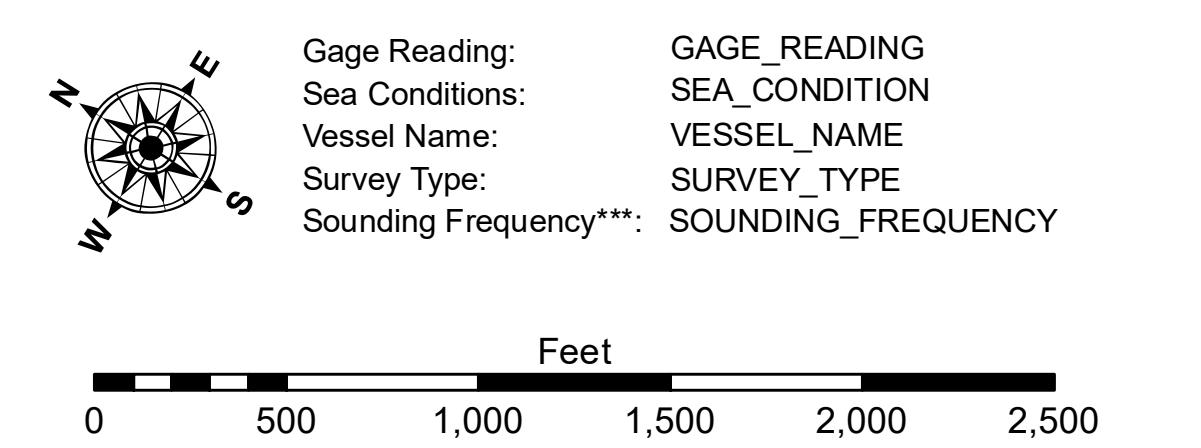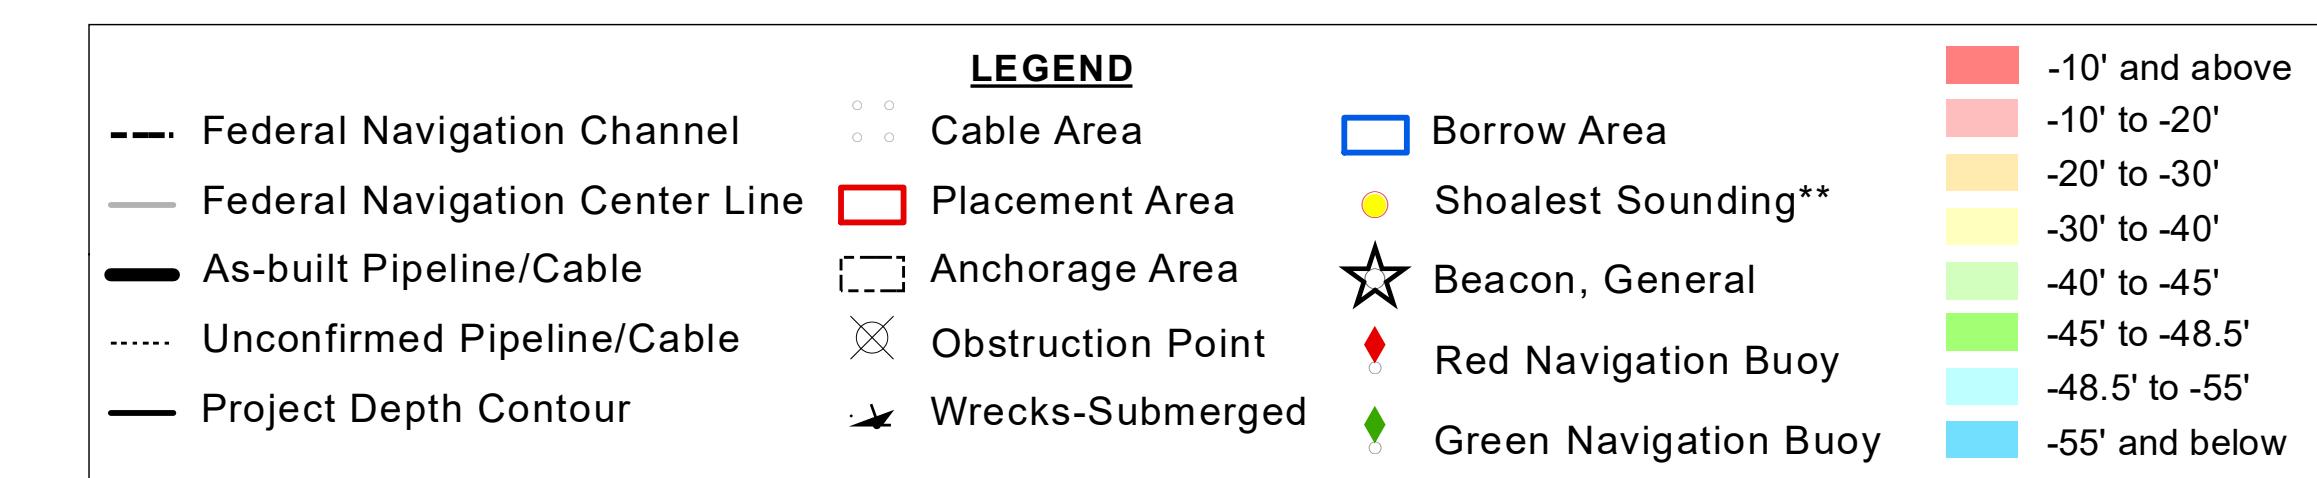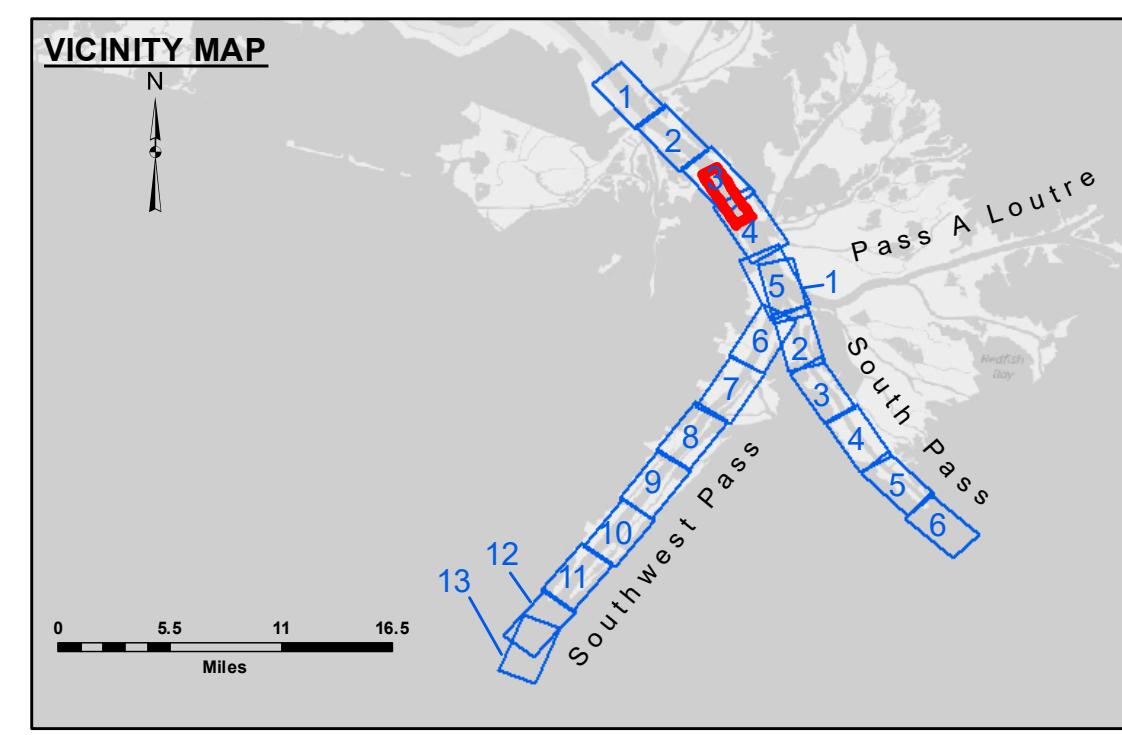

**NOTES:**  
Horizontal Coordinate System:  
North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum:  
Soundings are shown in feet and indicate depths below Mean Lower Low Water (MLLW, 07-11).  
Datum Relationships for gage 01525 as of July 2015:  
0.0' NAVD88 = -0.3' MLLW = 3.20' MLG

Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.

The location of navigation aids are base on and provided by the U.S. Coast Guard.

2016 Aerial Photography data source: Precision Aerial Reconnaissance, LLC (1998 DOQQ in green)

Reference is N.O.A.A. Navigation Chart No. 11361.

\*\* Shoalest Sounding per Quarter per Reach.

\*\*\* High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (24 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

Sheet  
Reference  
Number  
4 of 13

Revision Number:  
4-1-20191105