

Disclaimer: The data represents the results of data collection/processing for a specific US Army Corps of Engineers activity and is not intended for general use. The user is responsible for the results of the application of the data for other than its intended purpose. The data is not to be used for navigation purposes. The user is responsible for the results of the application of the data for other than its intended purpose. The data is not to be used for navigation purposes. The user is responsible for the results of the application of the data for other than its intended purpose.


DISCLAIMER: The United States Government furnishes these data and the recipient accepts them with the express understanding that the data is not to be used for navigation purposes, or implied concerning the accuracy, completeness, or timeliness of the data. The United States Government makes no warranty, express or implied, for the use of the data for any purpose other than that for which it was prepared. The recipient may not transfer these data to others without obtaining the permission of the Government. The recipient may not transfer these data to others without obtaining the permission of the Government. The recipient may not transfer these data to others without obtaining the permission of the Government.

Submitted:	Surveyed By:	JTB & DED
Recommended:	Plotted By:	RSL
Approved:	Checked By:	MSK

MISSISSIPPI RIVER - B. R. TO GULF SOUTHWEST PASS - SHEET 2
SW_02_SWPX_20240715_CS_B2B
 15 July 2024

Sheet Reference Number
 2 of 13

Revision Number: 5.23.12.3-3.23.12.3

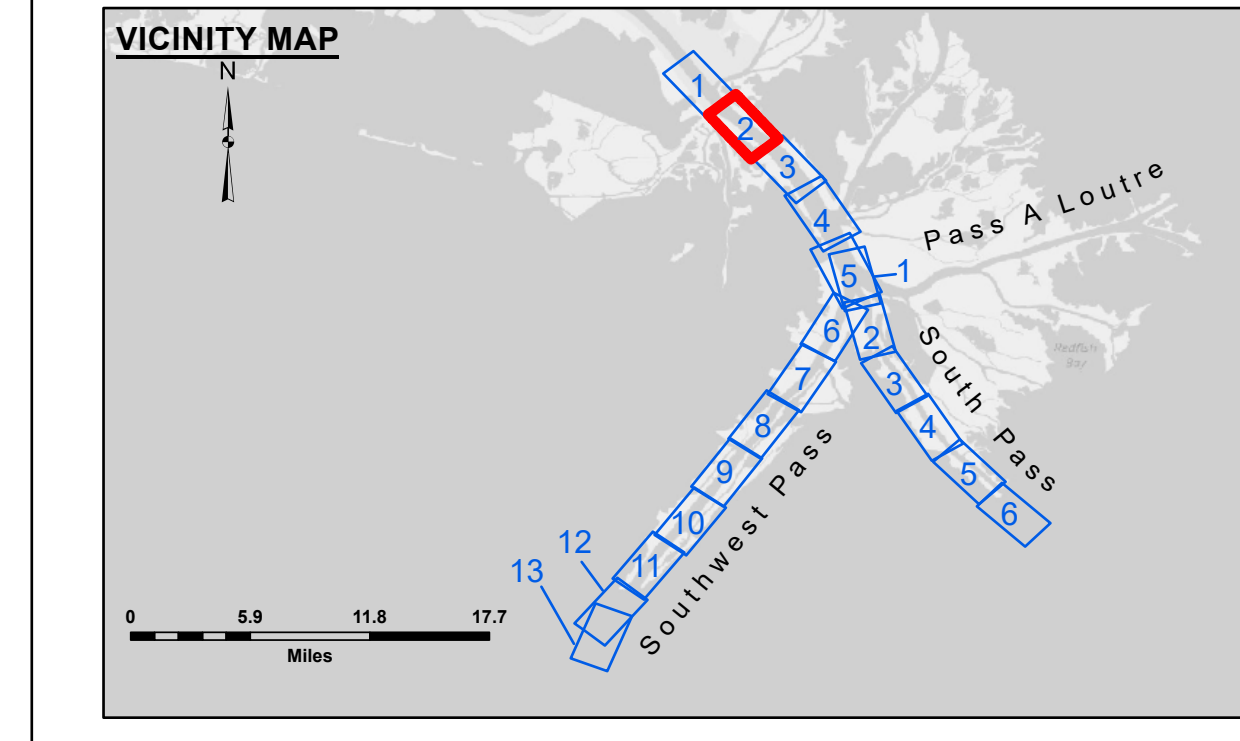

LEGEND	
--- Federal Navigation Channel	● Cable Area
— Federal Navigation Center Line	■ Placement Area
— As-built Pipeline/Cable	□ Anchorage Area
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point
— Project Depth Contour	★ Wrecks-Submerged
3 Fluff Thickness (feet)*	■ Borrow Area
● Shoalest Sounding**	★ Beacon, General
★ Red Navigation Buoy	◆ Green Navigation Buoy
■ -10' and above	■ -10' to -20'
■ -20' to -30'	■ -30' to -40'
■ -40' to -45'	■ -45' to -50'
■ -50' to -55'	■ -55' and below

NOTES:

Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum: Mean Lower Low Water (MLLW, 12-16).
 Soundings are shown in feet and indicate depths below Mean Lower Low Water (MLLW, 12-16).
 Datum Relationships for gage 01480 as of March 2020:
 0.0' NAVD83, 2009.55 = -0.53' MLLW = 2.97' MLG

Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.

The location of navigation aids are base on and provided by the U.S. Coast Guard.

2024 Aerial Photography data source: Optimal GEO (1998 DOQQ in green)

Reference is N.O.A. Navigation Chart No. 11361.

** Shoalest Sounding per Quarter Per Reach.

*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (24 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

Gage Reading: 0.7 MLLW @ VENICE (01480) @ 1030
 Sea Conditions: CALM
 Vessel Name: OB-173
 Survey Type: CONDITION, SB
 Sounding Frequency***: LOW