
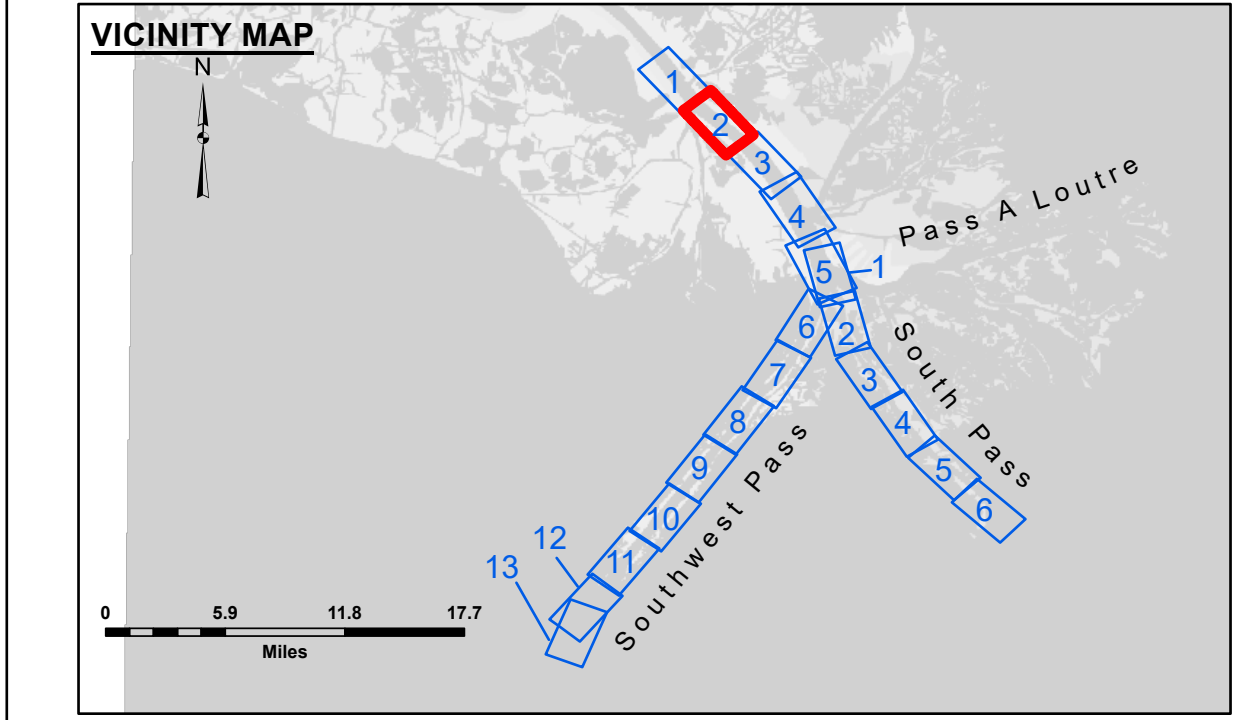


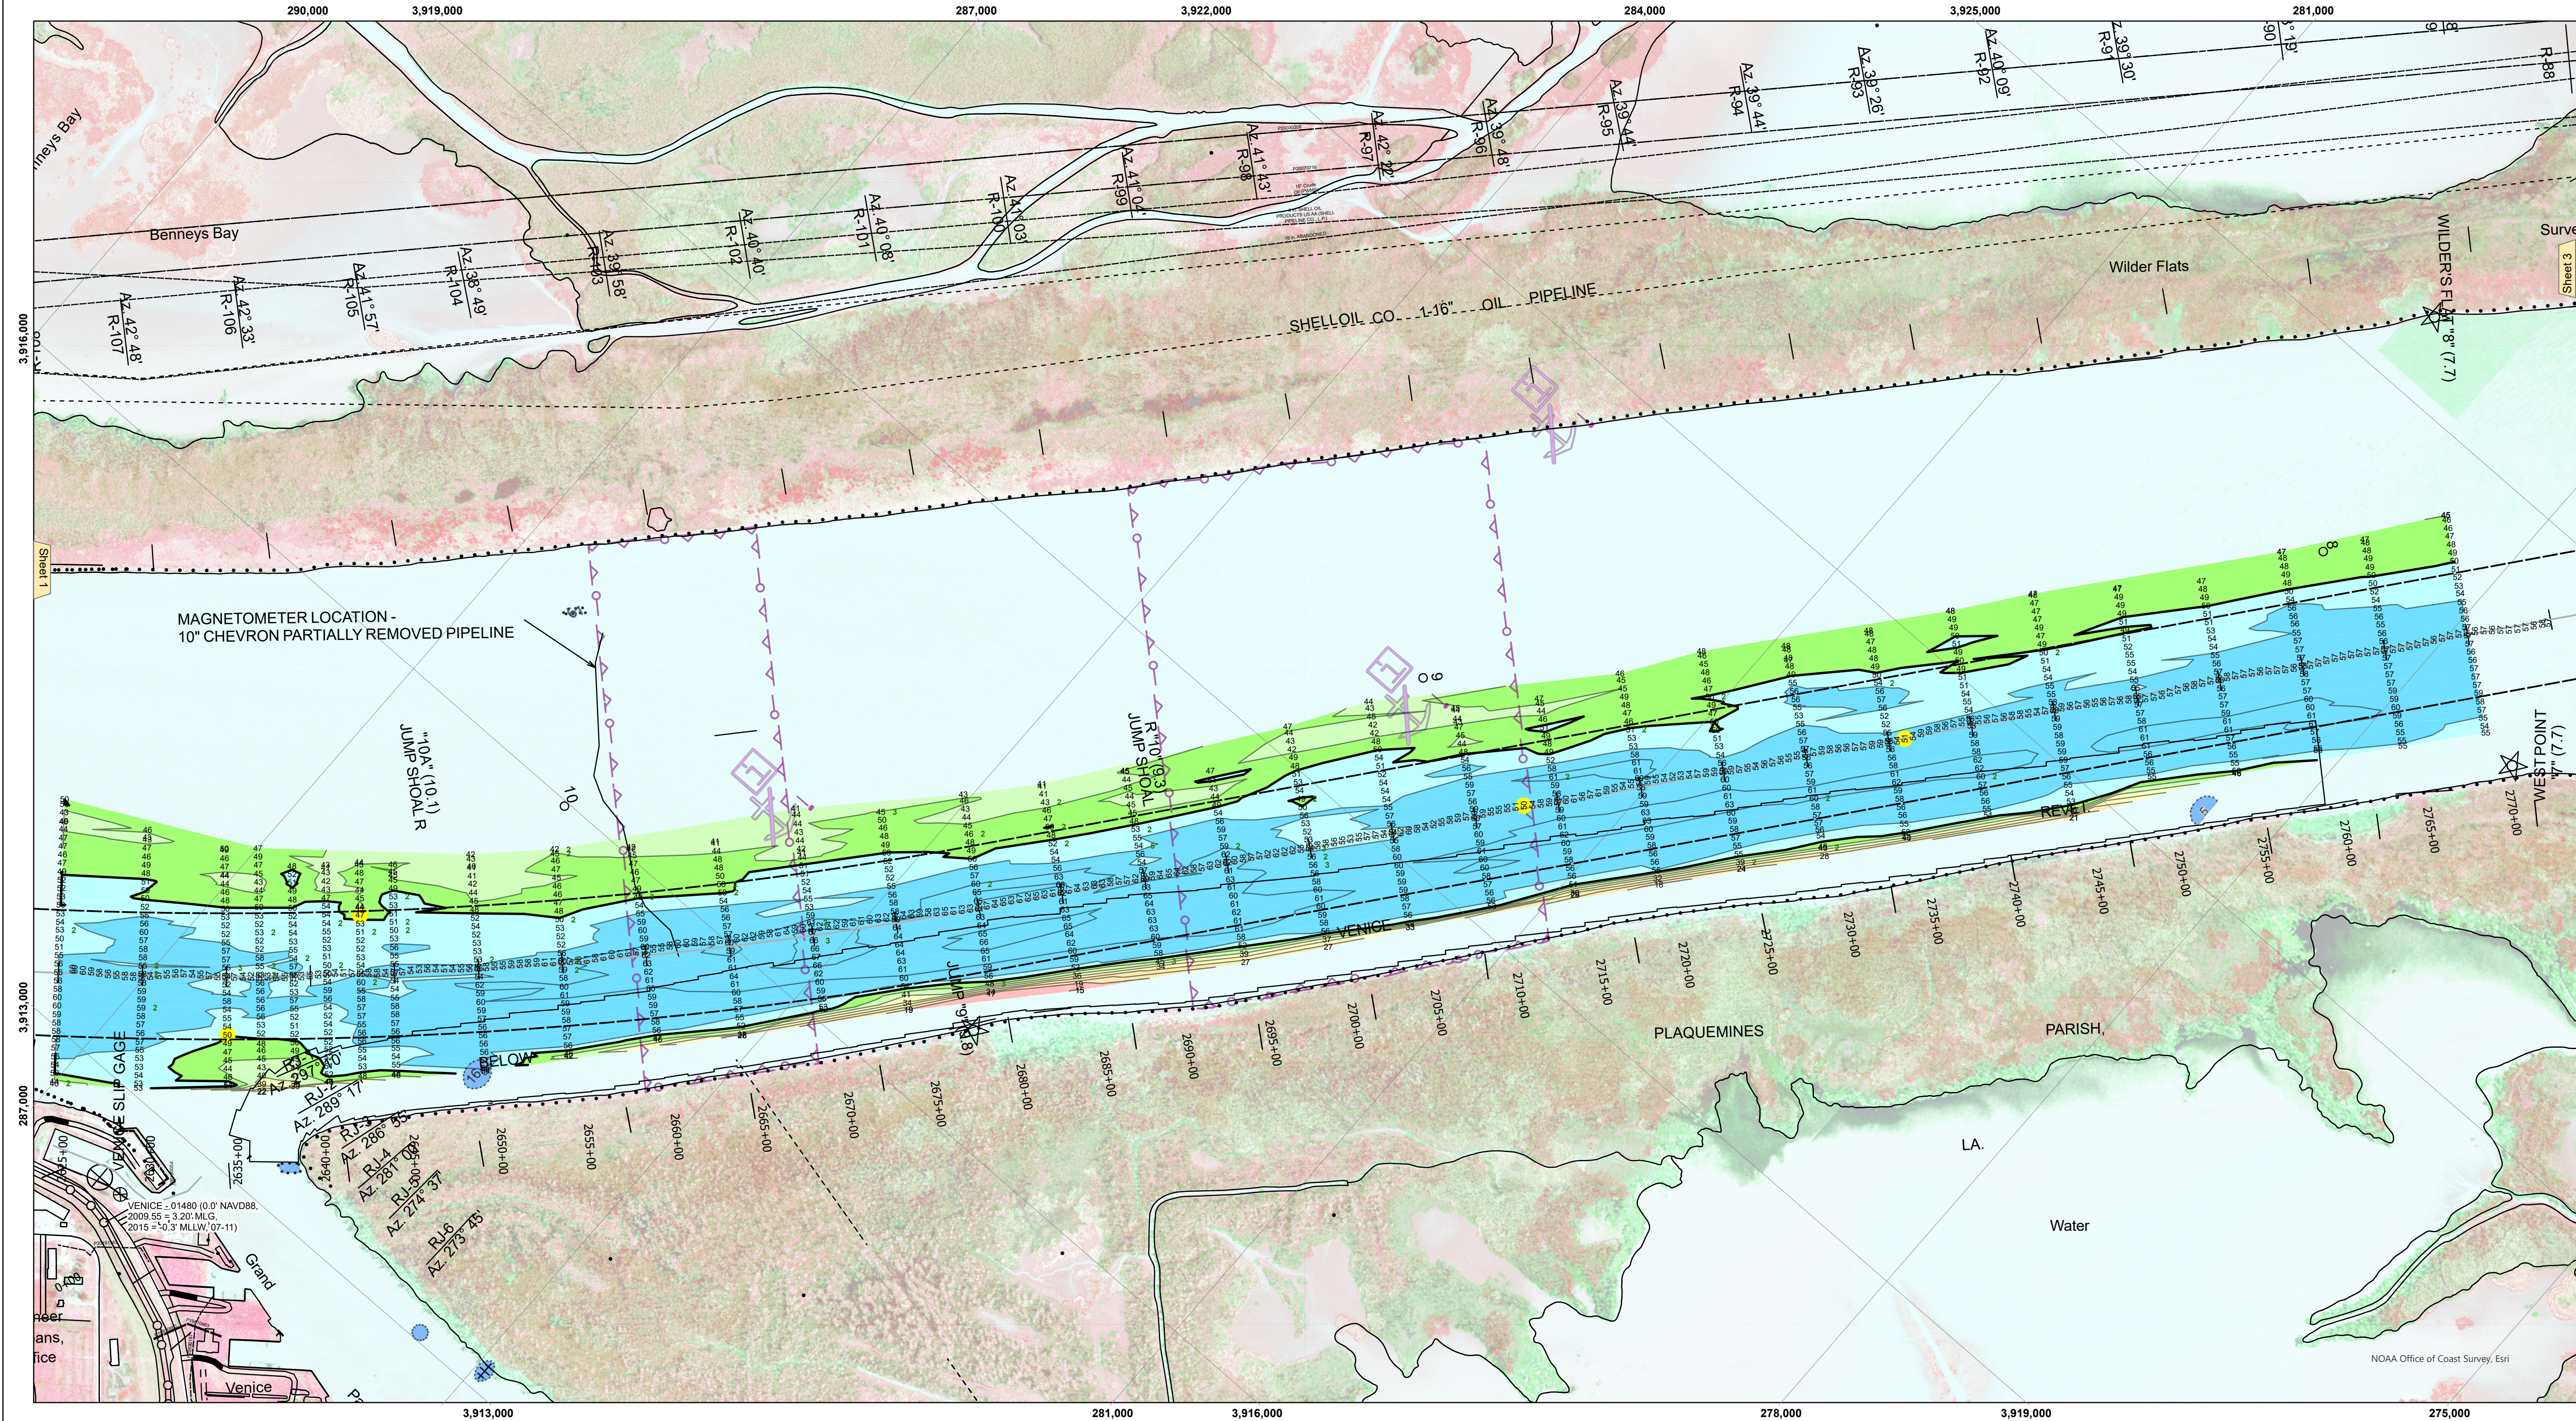

LEGEND

--- Federal Navigation Channel

— Federal Navigation Center Line

— As-built Pipeline/Cable

..... Unconfirmed Pipeline/Cable

— Project Depth Contour

○ Cable Area

□ Anchorage Area

⊗ Obstruction Point

✶ Wrecks-Submerged

3 Fluff Thickness (feet)*

□ Borrow Area

● Shoalest Sounding**

☆ Beacon, General

◆ Red Navigation Buoy

◇ Green Navigation Buoy

■ -10' and above

■ -10' to -20'

■ -20' to -30'

■ -30' to -40'

■ -40' to -45'

■ -45' to -50'

■ -50' to -55'

■ -55' and below

Gage Reading: 1.7 MLLW @ VENICE (01480) @ 0850

Sea Conditions: CALM

Vessel Name: OB-173

Survey Type: CONDITION, SB

Sounding Frequency***: LOW

Vertical Datum: 0.0' NAVD83, 2009.55 = -0.53' MLLW = 2.97' MLG

Horizontal Datum: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.

The location of navigation aids are base on and provided by the U.S. Coast Guard.

2024 Aerial Photography data source: Optimal GEO (1998 DOQQ in green)

Reference is N.O.A.A. Navigation Chart No. 11361.

*** Shoalest Sounding per Quarter per Reach.

*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (24 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

0 500 1,000 1,500 2,000 2,500

Feet

NOTES:

Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum: 0.0' NAVD83, 2009.55 = -0.53' MLLW = 2.97' MLG

Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.

The location of navigation aids are base on and provided by the U.S. Coast Guard.

2024 Aerial Photography data source: Optimal GEO (1998 DOQQ in green)

Reference is N.O.A.A. Navigation Chart No. 11361.

*** Shoalest Sounding per Quarter per Reach.

*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (24 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

US Army Corps of Engineers

District: CEMVN

DISCLAIMER

The United States Government furnishes these data and the recipient accepts and uses them with the express understanding that the data are not warranted for any specific purpose, expressed, or implied concerning the accuracy, completeness, reliability, usability, or suitability for any particular purpose of the recipient. The user is responsible for the results of any application of the data for other than its intended purpose. The data are not to be used for any purpose other than that for which they were collected. The data are not to be used for any purpose other than that for which they were collected. The data are not to be used for any purpose other than that for which they were collected.

U.S. ARMY CORPS OF ENGINEERS NEW ORLEANS DISTRICT	
Submitted	Surveyed By: JTB & JJC
Recommended	Plotted By: LLB
Approved	Checked By: MSK

MISSISSIPPI RIVER - B.R. TO GULF

SOUTHWEST PASS - SHEET 2

SW_02_SWPX_20250621_CS

21 May 2025

Sheet Reference Number

2 of 13

Revision Number:
5.23.12.3-5.23.12.3