


**PILOTOWN ANCHORAGE**  
 An area approximately 5.2 miles in length along the right descending bank or west side of the river. The east limit of the anchorage area at the upstream end starts at a point approximately 1,600 feet from the east bank at Mile 6.7 above Head of Passes and extends downstream generally parallel to and 1,600 feet from the east bank line to a point directly opposite Old Quarantine Station Light at Mile 3.7 above Head of Passes, thence to a point 1,600 feet directly opposite Cubits Gap Light at Mile 2.8 above Head of Passes, thence to a point 1,600 feet directly opposite Pilot town Wingdam Light at Mile 1.5 above Head of Passes, which is the downstream limit of the anchorage area.

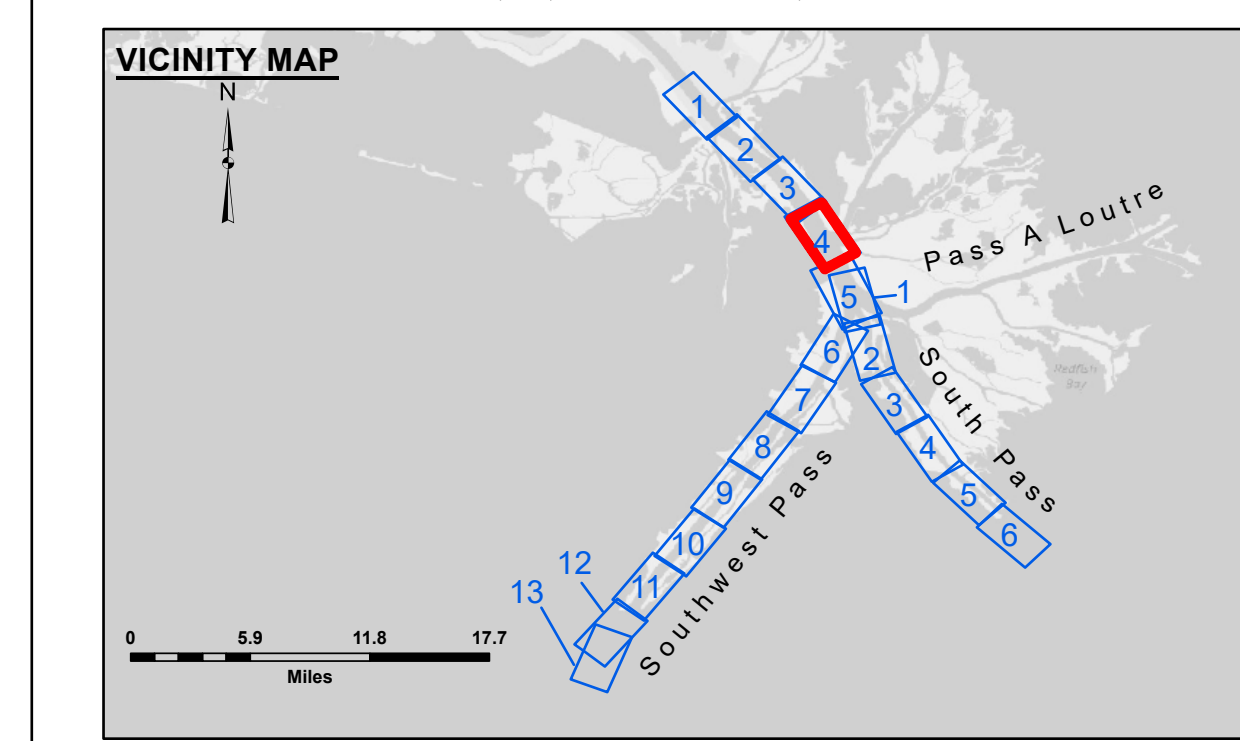

**LEGEND**

--- Federal Navigation Channel	○ Cable Area	3 Fluff Thickness (feet)*	■ -10' and above
— Federal Navigation Center Line	□ Placement Area	□ Borrow Area	■ -10' to -20'
— As-built Pipeline/Cable	○ Shoalest Sounding**	★ Beacon, General	■ -20' to -30'
..... Unconfirmed Pipeline/Cable	⊗ Anchorage Area	◆ Red Navigation Buoy	■ -30' to -40'
— Project Depth Contour	⊗ Obstruction Point	◆ Green Navigation Buoy	■ -40' to -45'
	⊗ Wrecks-Submerged		■ -45' to -55'
			■ -55' and below

Gage Reading: 0.2 MLLW @ P.T. (01525) @ 1110  
 Sea Conditions: CALM  
 Vessel Name: TOBIN  
 Survey Type: CONDITION, SB  
 Sounding Frequency\*\*\*: LOW

Vertical Datum:  
 Soundings are shown in feet and indicate depths below Mean Lower Low Water (MLLW, 12-16).  
 Datum Relationships for gage 01525 as of March 2020:  
 0.0' NAVD83, 2009.55 = -0.53' MLLW = 2.97' MLG

Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.

The location of navigation aids are base on and provided by the U.S. Coast Guard.

2024 Aerial Photography data source: Optimal GEO (1998 DOQQ in green)

Reference is N.O.A.A. Navigation Chart No. 11361.

\*\* Shoalest Sounding per Quarter Per Reach.

\*\*\* High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (24 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.



**DISCLAIMER:** The data represented on this map was derived from the results of a bathymetric survey conducted by the U.S. Army Corps of Engineers. The Corps of Engineers is not responsible for the accuracy, completeness, or reliability of the data for any purpose other than that for which it was collected. The Corps of Engineers is not responsible for any damage or injury resulting from the use of this map. The Corps of Engineers is not responsible for any damage or injury resulting from the use of this map.

**DISCLAIMER:** The United States Government furnishes this data and the recipient accepts and uses them with the express understanding that the United States Government makes no warranty, expressed or implied, concerning the accuracy, completeness, or reliability of the data. The recipient agrees to indemnify and hold the United States Government harmless from any and all claims, damages, and expenses, including reasonable attorneys' fees, that may be incurred by the United States Government as a result of the use of this data. The recipient may not transfer this data to others without obtaining the permission of the United States Government.

U.S. ARMY CORPS OF ENGINEERS	
Submitted:	Surveyed By: JUC & RCC
Recommended:	Plotted By: RSL
Approved:	Checked By: MSK

**MISSISSIPPI RIVER - B. R. TO GULF  
 SOUTHWEST PASS - SHEET 4  
 SW\_04\_SWPX\_20240812\_CS\_B2B  
 12 August 2024**

**Sheet Reference Number  
 4 of 13**

Revision Number: 5.23.12.3-3.23.12.3