


**US Army Corps of Engineers District: CEMVN**

**DISCLAIMER:**  
 Access to this information is limited to authorized personnel only. The user is responsible for the results of the data collection and processing for a specific project. The data is only valid for the intended use, content, time and accuracy specifications. The user is responsible for the results of the data collection and processing for a specific project. The data is only valid for the intended use, content, time and accuracy specifications. The user is responsible for the results of the data collection and processing for a specific project. The data is only valid for the intended use, content, time and accuracy specifications.

U.S. ARMY CORPS OF ENGINEERS NEW ORLEANS DISTRICT	
Submitted:	JTB & DBD
Recommended:	Filed By: RSL
Checked By:	MSK
Approved:	Cadet, Waterways Maintenance Section

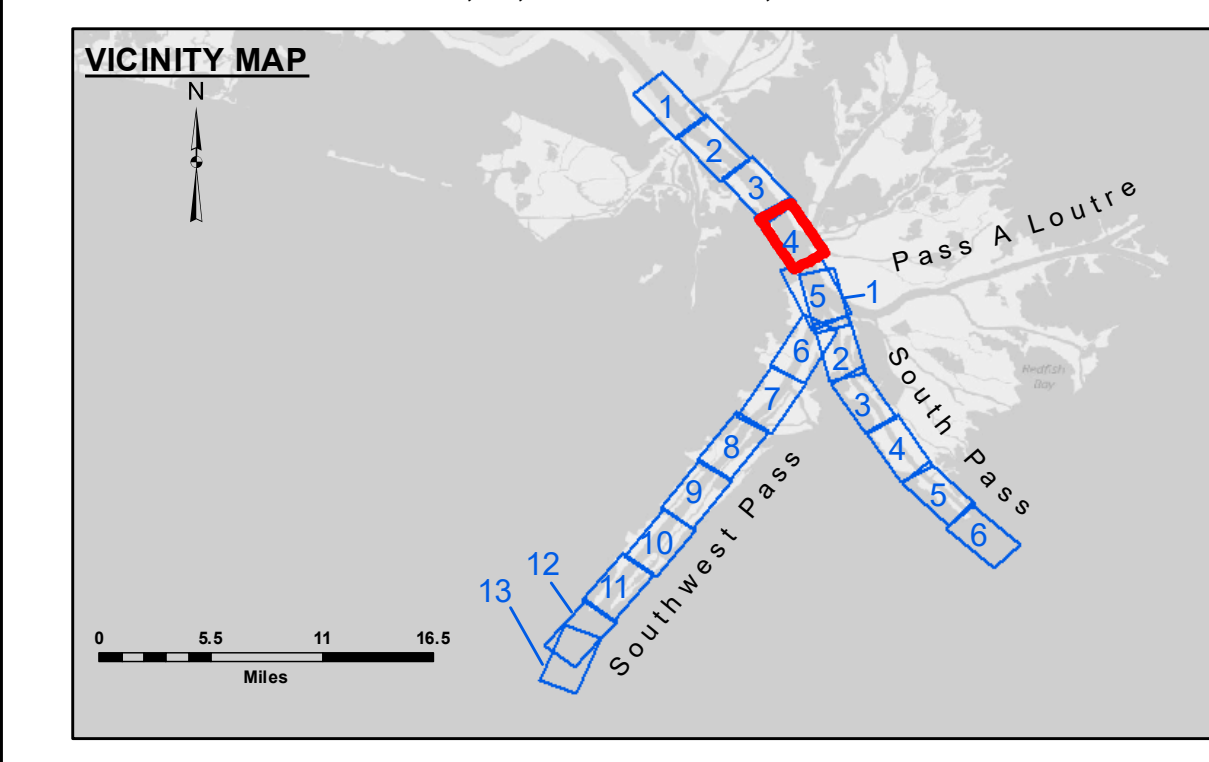

**LEGEND**

Federal Navigation Channel	Cable Area	Borrow Area	Placement Area
Federal Navigation Center Line	Anchorage Area	Shoalest Sounding**	Beacon, General
As-built Pipeline/Cable	Obstruction Point	Red Navigation Buoy	Green Navigation Buoy
Unconfirmed Pipeline/Cable	Wrecks-Submerged	-10' and above	-45' to -48.5'
Project Depth Contour		-10' to -20'	-48.5' to -55'
		-20' to -30'	-55' and below
		-30' to -40'	
		-40' to -45'	

**NOTES:**

Horizontal Coordinate System:  
 North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum:  
 Soundings are shown in feet and indicate depths below Mean Lower Low Water (MLLW, 07-11).  
 Datum Relationships for gage 01525 as of July 2015:  
 0.0' NAVD83 = -0.3' MLLW = 3.20' MLG

Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.

The location of navigation aids are base on and provided by the U.S. Coast Guard.

2016 Aerial Photography data source: Precision Aerial Reconnaissance, LLC (1998 DOQQ in green)

Reference is N.O.A. Navigation Chart No. 11361.

\*\* Shoalest Sounding per Quarter per Reach.

\*\*\* High frequency (200 kHz) survey data represents the first signal return at a sounding and will include suspended solids, known as "fluff", if present. Low frequency (24 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

Gage Reading: 2.4 MLLW @ PILOT TOWN @ 1230  
 Sea Conditions: CHOPPY  
 Vessel Name: BEAUVAIS  
 Survey Type: CONDITION, SB  
 Sounding Frequency\*\*\*: LOW

**MISSISSIPPI RIVER - B.R. TO GULF  
 SOUTHWEST PASS - SHEET 4  
 SW\_04\_SWP\_20190317\_CS  
 17 March 2019**

**Sheet Reference Number  
 4 of 13**

Revision Number:  
 3.13-20160811