

US Army
Corps
of Engineers
District: CEMVN

Distribution Liability: The data represents the results of data collection/processing for a specific US Army Corps of Engineers activity and includes the general existing conditions. As such, the user is responsible for any particular use of the results of any of the application of the data to other than its intended purpose.


Data Constraints: Hydrographic survey data is subject to change rapidly due to several factors including burial, shifts in dredging, changes in riverbed material, and changes in hydrographical conditions which develop after the date of publication. The data is intended for use by the Army Corps of Engineers as a reference for engineering purposes only. It is not to be used for navigation or surveying.

The information depicted on this map represents the results of a survey conducted on the date indicated and can only be considered valid for the general conditions existing at that time.

U.S. ARMY CORPS OF ENGINEERS NEW ORLEANS DISTRICT	
Surveyed By:	LL & SUR
Submitted:	
Recommended:	One Survey Section
Approved:	One Waterways Maintenance Section

**MISSISSIPPI RIVER - B.R. TO GULF
SOUTHWEST PASS - SHEET 4
SW_04_SWP_20200407_CS**


07 April 2020

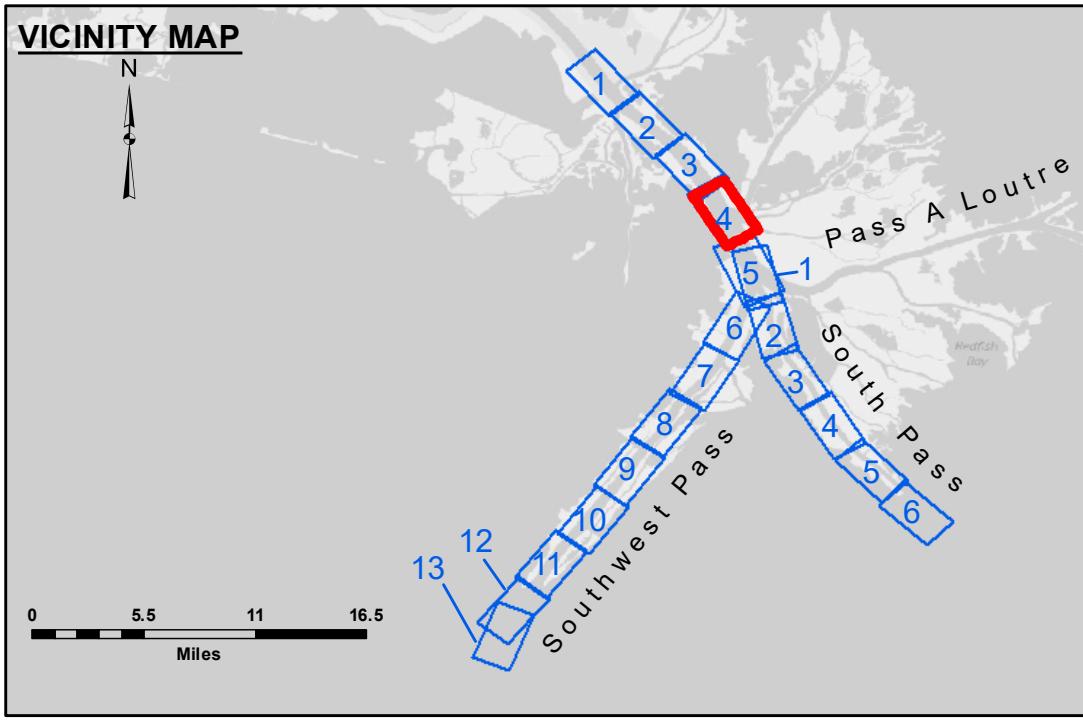

<u>LEGEND</u>	
— Federal Navigation Channel	○ Cable Area
— Federal Navigation Center Line	■ Placement Area
— As-built Pipeline/Cable	● Shoalest Sounding**
..... Unconfirmed Pipeline/Cable	□ Anchorage Area
— Project Depth Contour	★ Beacon, General
	⊗ Obstruction Point
	♂ Wrecks-Submerged
	◆ Red Navigation Buoy
	◆ Green Navigation Buoy

Gage Reading: 2.3 MLLW @ PILOT TOWN @ 1215
Sea Conditions: CALM
Vessel Name: TECHE
Survey Type: CONDITION, SB
Sounding Frequency***: LOW

0 500 1,000 1,500 2,000 2,500 Feet



NOTES:
Horizontal Coordinate System:
North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum:
Soundings are shown in feet and indicate depths below Mean Lower Low Water (MLLW, 07-11).
Datum Relationships for gage 01525 as of July 2015:
0.0' NAVD88 = -0.3' MLLW = 3.20' MLG

Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.

The location of navigation aids are base on and provided by the U.S. Coast Guard.

2016 Aerial Photography data source: Precision Aerial Reconnaissance, LLC (1998 DOQQ in green)

Reference is N.O.A.A. Navigation Chart No. 11361.

** Shoalest Sounding per Quarter per Reach.

*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (24 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

**Sheet
Reference
Number**

4 of 13

Revision Number:
4-0201907022