



Distribution Liability: The data represents the results of data collection... The user is responsible for the results... The information depicted on the map represents the results of a... considered to represent the general condition existing at that time.

Table with columns: Submitted, Recommended, Checked By. Values include JH & RCC, TSS, MSK.


MISSISSIPPI RIVER - B.R. TO GULF
SOUTHWEST PASS - SHEET 4
SW_04_SWP_20220207_CS
07 February 2022

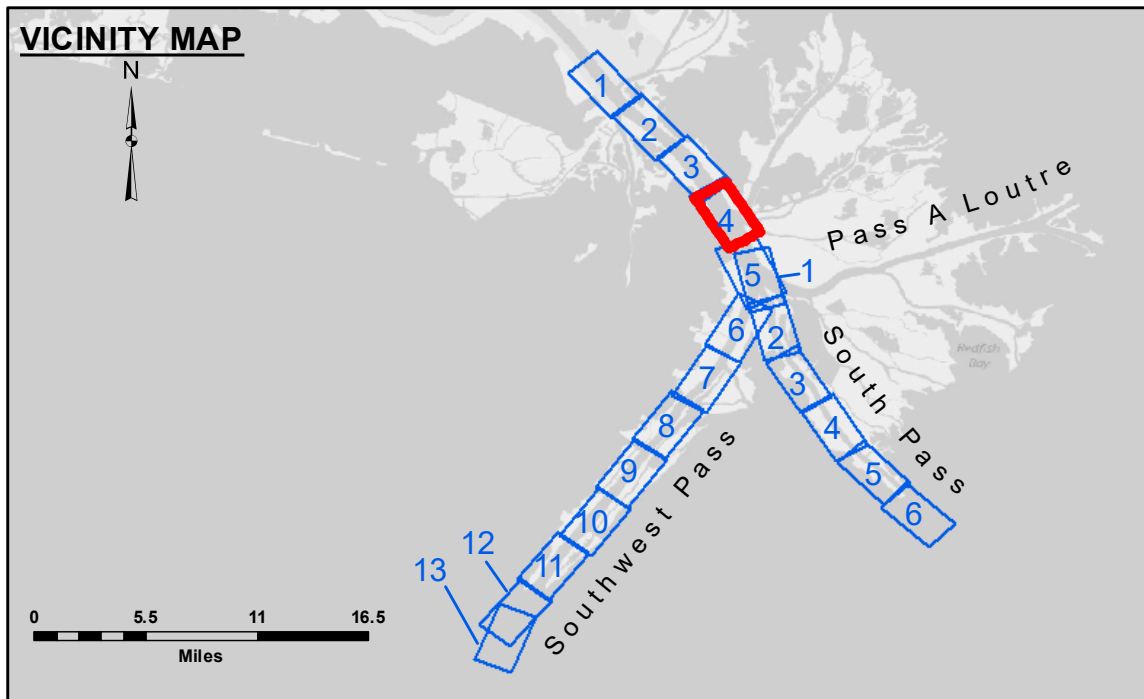

LEGEND table listing symbols for Federal Navigation Channel, Cable Area, Borrow Area, Shoalest Sounding, Anchorage Area, Obstruction Point, Wrecks-Submerged, As-built Pipeline/Cable, Unconfirmed Pipeline/Cable, Project Depth Contour, Beacon, General, Red Navigation Buoy, Green Navigation Buoy, and depth ranges from -10' and above to -55' and below.

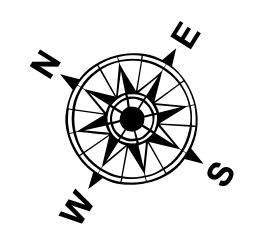

Gage Reading: 0.1 MLLW @ PILOT TOWN @ 0930
Sea Conditions: CALM
Vessel Name: JOHN BOPP
Survey Type: CONDITION, SB
Sounding Frequency***: LOW

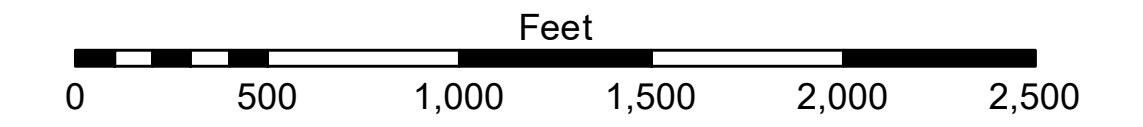

NOTES:
Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.
Vertical Datum: Soundings are shown in feet and indicate depths below Mean Lower Low Water (MLLW, 12-16). Datum Relationships for gage 01525 as of March 2020: 0.0' NAVD86, 2009.55 = -0.53' MLLW = 2.97' MLG
Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.
The location of navigation aids are base on and provided by the U.S. Coast Guard.
2016 Aerial Photography data source: Precision Aerial Reconnaissance, LLC (1998 DOQQ in green)
Reference is N.O.A. Navigation Chart No. 11361.
*** Shoalest Sounding per Quarter per Reach.
*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (24 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

Sheet Reference Number
4 of 13
Revision Number:
4.2-20220429