



PILOT TOWN ANCHORAGE
 An area approximately 5.2 miles in length along the right descending bank or west side of the river. The east limit of the anchorage area at the upstream end starts at a point approximately 1,600 feet from the east bank at Mile 6.7 above Head of Passes and extends downstream generally parallel to and 1,600 feet from the east bank line to a point directly opposite Old Quarantine Station Light at Mile 3.7 above Head of Passes, thence to a point 1,600 feet directly opposite Cubits Gap Light at Mile 2.8 above Head of Passes, thence to a point 1,600 feet directly opposite Pilot town Wingdam Light at Mile 1.5 above Head of Passes, which is the downstream limit of the anchorage area.



LEGEND	
--- Federal Navigation Channel	● Cable Area
— Federal Navigation Center Line	□ Placement Area
— As-built Pipeline/Cable	□ Anchorage Area
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point
— Project Depth Contour	⚓ Wrecks-Submerged
3 Fluff Thickness (feet)*	★ Beacon, General
□ Borrow Area	◆ Red Navigation Buoy
● Shoalest Sounding**	◆ Green Navigation Buoy
■ -10' and above	
■ -10' to -20'	
■ -20' to -30'	
■ -30' to -40'	
■ -40' to -45'	
■ -45' to -50'	
■ -50' to -55'	
■ -55' and below	

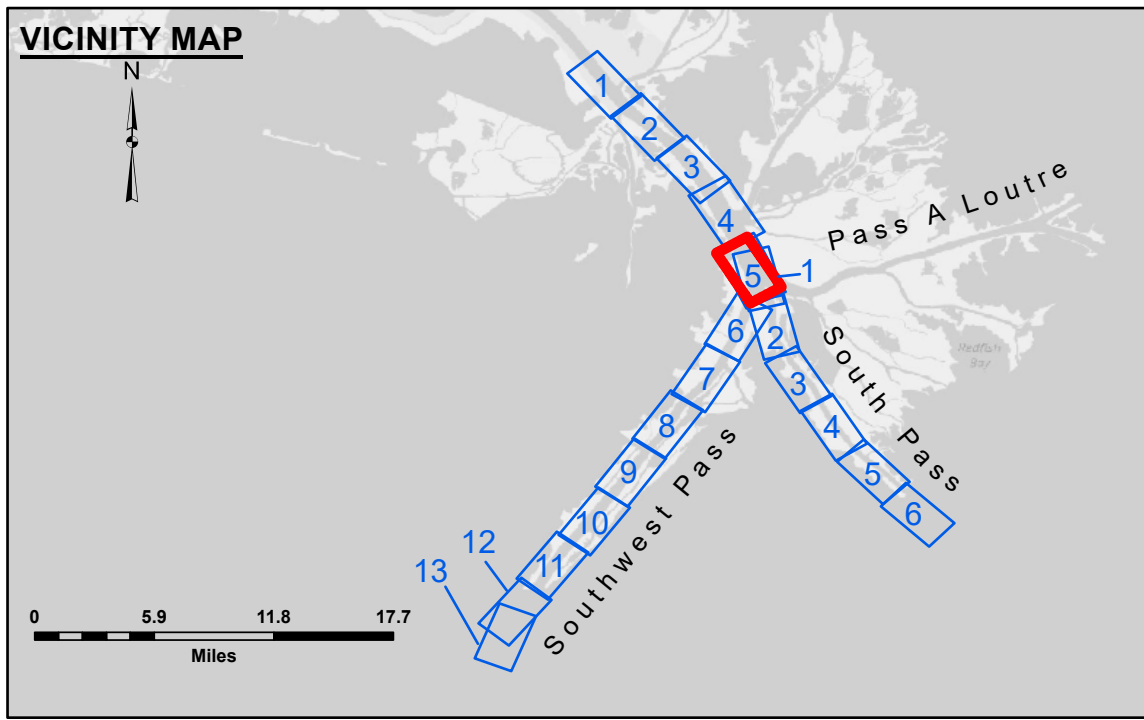

Gage Reading: 1.7 MLLW @ P.T. (01525) @ 1150
 Sea Conditions: CALM
 Vessel Name: TOBIN
 Survey Type: CONDITION, SB
 Sounding Frequency***: LOW



NOTES:
 Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.
 Vertical Datum: Soundings are shown in feet and indicate depths below Mean Lower Low Water (MLLW, 12-16). Datum Relationships for gage 01525 as of March 2020: 0.0' NAVD83, 2009.55 = -0.53' MLLW = 2.97' MLG
 Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.
 The location of navigation aids are based on and provided by the U.S. Coast Guard.
 2024 Aerial Photography data source: Optimal GEO (1998 DOQQ in green)
 Reference is N.O.A.A. Navigation Chart No. 11361.
 ** Shoalest Sounding per Quarter Per Reach.
 *** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (24 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.



DISCLAIMER: The United States Government furnishes these data and the recipient accepts and uses them with the express understanding that the Government makes no warranty, expressed or implied, concerning the accuracy, completeness, reliability, or timeliness of the data furnished. The United States Government will not be liable for any damages, including consequential, special, or exemplary damages, that may result from the use of the information contained herein, whether or not such damages were foreseeable. The recipient agrees to indemnify and hold the Government harmless from all claims, damages, and expenses, including reasonable attorneys' fees, that may be asserted against or incurred by the Government or its employees, agents, or contractors, in connection with or arising from the use of the information contained herein. The information contained on this map represents the results of a survey conducted on or about the date of publication. This data is intended for use by the U.S. Army Corps of Engineers and is not to be used for any other purpose without the written consent of the U.S. Army Corps of Engineers.

DISCLAIMER: The United States Government furnishes these data and the recipient accepts and uses them with the express understanding that the Government makes no warranty, expressed or implied, concerning the accuracy, completeness, reliability, or timeliness of the data furnished. The United States Government will not be liable for any damages, including consequential, special, or exemplary damages, that may result from the use of the information contained herein, whether or not such damages were foreseeable. The recipient agrees to indemnify and hold the Government harmless from all claims, damages, and expenses, including reasonable attorneys' fees, that may be asserted against or incurred by the Government or its employees, agents, or contractors, in connection with or arising from the use of the information contained herein. The information contained on this map represents the results of a survey conducted on or about the date of publication. This data is intended for use by the U.S. Army Corps of Engineers and is not to be used for any other purpose without the written consent of the U.S. Army Corps of Engineers.

Submitted:	Surveyed By:	JTB & RCC
Recommended:	Plotted By:	RSL
Approved:	Checked By:	MSK

U.S. ARMY CORPS OF ENGINEERS
 Chief, Survey Section
 Chief, Waterways Maintenance Section

**MISSISSIPPI RIVER - B. R. TO GULF
 SOUTHWEST PASS - SHEET 5
 SW_05_SWPX_20240805_CS**
 05 August 2024

Sheet Reference Number
 5 of 13

Revision Number: 5.23.12.3-3.23.12.3