


US Army Corps of Engineers  
District: CEMVN

**DISCLAIMER:**  
Access Constraints: The United States Government furnishes these data and the recipient corps and uses them with the express understanding that the U.S. Government makes no warranties, expressed or implied, concerning the general existing condition such, utility or suitability or fitness for any particular purpose of the information and the data furnished. The United States shall be under no obligation to furnish copies of any maps or data to the recipient agency unless so requested by reason of any emergency. The recipient agency agrees not to represent these data as other than Government provided data. The recipient may not transfer these data or other data contained in this document.

The information depicted on this map represents the results of a survey conducted on the date indicated and can only be considered valid for the general conditions existing at that time. It is the responsibility of the user to determine if the data is still valid.

**U.S. ARMY CORPS OF ENGINEERS**  
NEW ORLEANS DISTRICT  
Surveyed By: HNP/MMS/IH & TDG  
Submitted:  Recommended:  Survey Section: One I Survey Section  
Approved:  Waterways Maintenance Section

**MISSISSIPPI RIVER - B.R. TO GULF**  
**SOUTHWEST PASS - SHEET 5**  
**SW\_05\_SWP\_20180301\_CS**  
01 March 2018

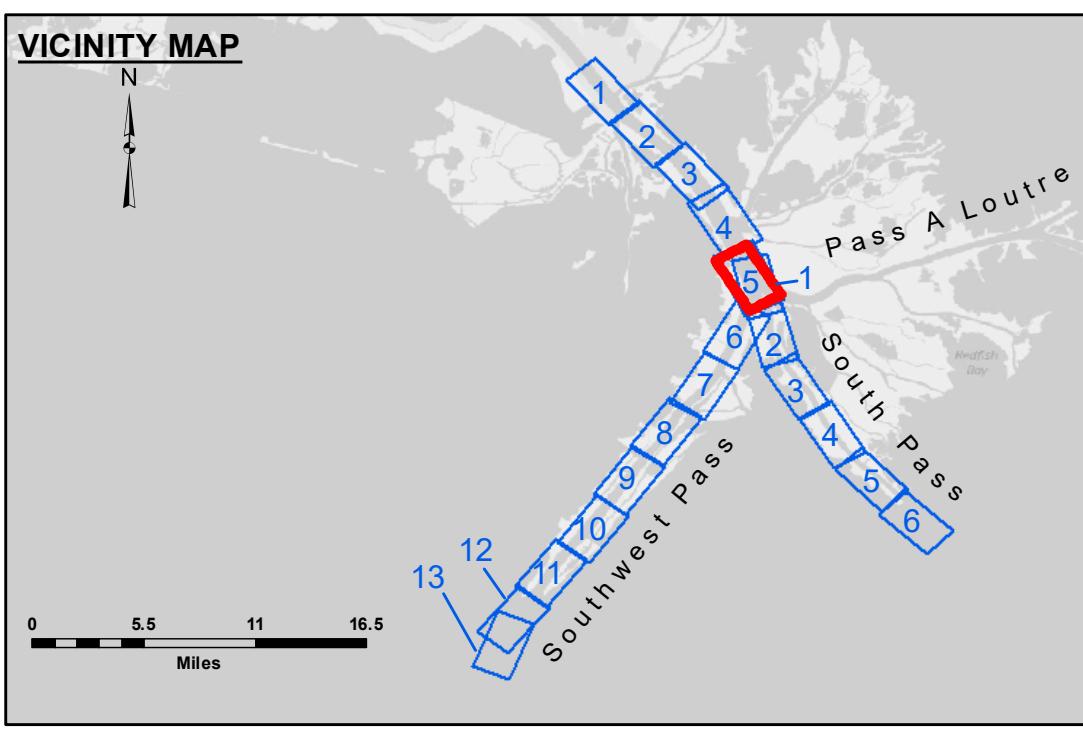

			-10' and above
			-10' to -20'
			-20' to -30'
			-30' to -40'
			-40' to -45'
			-45' to -48.5'
			-48.5' to -55'
			-55' and below

**NOTES:**  
Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.  
Vertical Datum: Soundings are shown in feet and indicate depths below Mean Lower Low Water (MLLW, 07-11). Datum Relationships for gage 01525 as of July 2015: 0.0' NAVD88 = -0.3' MLLW = 3.20' MLG  
Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.  
The location of navigation aids are base on and provided by the U.S. Coast Guard.  
2016 Aerial Photography data source: Precision Aerial Reconnaissance, LLC (1998 DOQQ in green)  
Reference is N.O.A.A. Navigation Chart No. 11361.  
\*\* Shoalest Sounding per Quarter per Reach.

\*\*\* High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (24 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

**Sheet Reference Number**  
5 of 13

Revision Number: 312-20160811