


US Army Corps
of Engineers
District: CEMVN

DISCLAIMER:
Access Constraints: The United States Government furnishes this data and the recipient corps and uses them with the express understanding that the US Government makes no warranties, expressed or implied, concerning the general accuracy of such information and that it is not necessarily suitable or accurate for any particular purpose. The United States shall be under no liability for damages resulting from the use of any information contained in this document. The recipient corps and the recipient agency agrees not to represent these data to anyone as other than Government provided data. The recipient may not transfer this document to anyone without also transferring this Disclaimer.

The information depicted on this map represents the results of a survey conducted on the date indicated and can only be considered reliable in the general condition existing at the time. It is not to be taken as a guarantee of future conditions. The data is intended for use by the Army Corps of Engineers and its contractors and is not to be used by others without permission.

| |
|------------------------------|
| U.S. ARMY CORPS OF ENGINEERS |
| NEW ORLEANS DISTRICT |
| Surveyed By: JTB & TDG |
| Protected By: TS |
| Charged By: NSK |

MISSISSIPPI RIVER - B.R. TO GULF
SOUTHWEST PASS - SHEET 5
SW_05_SWP_20180327_CS
27 March 2018

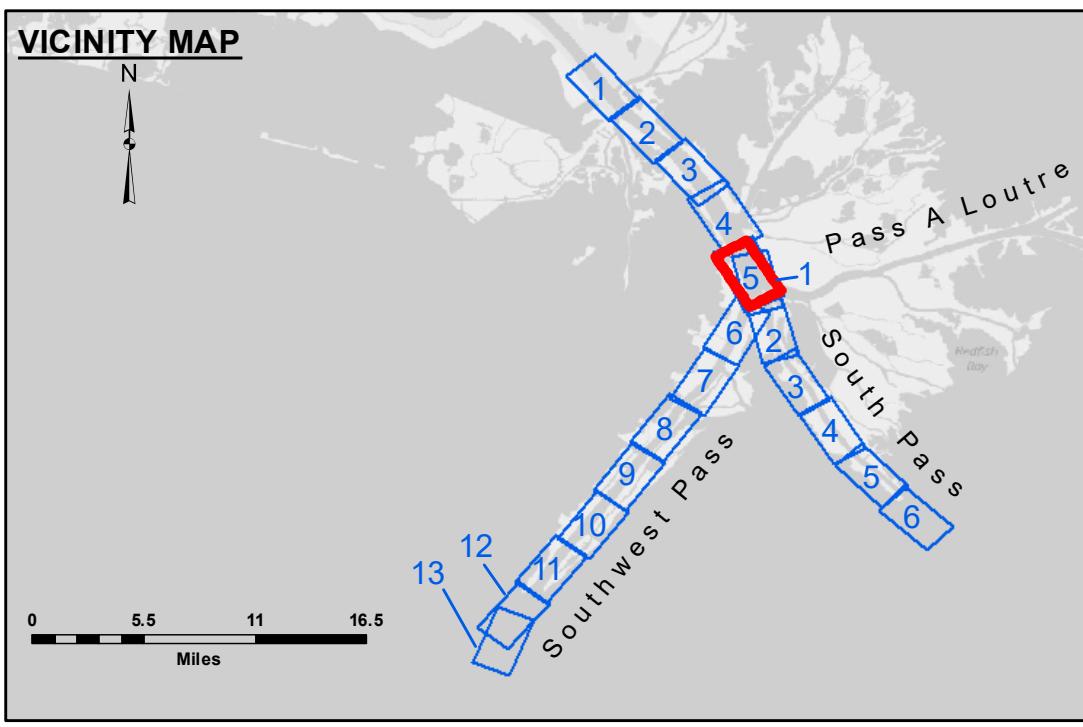

| LEGEND | |
|----------------------------------|-------------------------|
| — Federal Navigation Channel | ○ Cable Area |
| — Federal Navigation Center Line | ■ Placement Area |
| — As-built Pipeline/Cable | □ Anchorage Area |
| Unconfirmed Pipeline/Cable | ★ Beacon, General |
| — Project Depth Contour | ☒ Obstruction Point |
| | ◆ Red Navigation Buoy |
| | ◆ Green Navigation Buoy |

Gage Reading: 2.0 MLLW @ PILOT TOWN @ 0930
Sea Conditions: CHOPPY
Vessel Name: JOHN BOPP
Survey Type: CONDITION, SB
Sounding Frequency***: LOW

0 500 1,000 1,500 2,000 2,500 Feet

NOTES:
Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum: Soundings are shown in feet and indicate depths below Mean Lower Low Water (MLLW, 07-11). Datum Relationships for gage 01525 as of July 2015: 0.0' NAVD88 = -0.3' MLLW = 3.20' MLG

Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.

The location of navigation aids are base on and provided by the U.S. Coast Guard.

2016 Aerial Photography data source: Precision Aerial Reconnaissance, LLC (1998 DOQQ in green)

Reference is N.O.A.A. Navigation Chart No. 11361.

** Shoal sounding per quarter per reach.

*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (24 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

Sheet Reference Number
5 of 13

Revision Number:
3.12-20160811