




US Army Corps  
of Engineers  
District: CEMVN

**DISCLAIMER:**  
Access Constraints: The United States Government furnishes these data and the recipient corps is urged to warrant its use, understanding that the U.S. Government makes no warranty, express or implied, as to the general accuracy of such information, its reliability or suitability for any particular purpose or the usefulness of the data furnished. The United States shall be under no liability or responsibility to the user or to others for any errors which may appear in the data. The user agrees to assume the risk of any damages resulting from his/her use of the data. The recipient agency agrees not to represent these data to anyone as other than Government provided data. The recipient may not transfer these data or other data contained in this document.

The information depicted on this map represents the results of a survey conducted on the date indicated and can only be considered reliable in the general condition existing at the time. It is the responsibility of the user to determine the hydrographic conditions which develop after the date of publication. This data is intended for U.S. Army Corps of Engineers use. Private or commercial use is not intended.

U.S. ARMY CORPS OF ENGINEERS	
NEW ORLEANS DISTRICT	
Surveyed By:	HNP & DBD
Protected By:	TS
Recommended:	One Survey Section
Approved:	One Waterways Maintenance Section

**MISSISSIPPI RIVER - B.R. TO GULF SOUTHWEST PASS - SHEET 5 SW\_05\_SWP\_20180426\_CS**  
26 April 2018

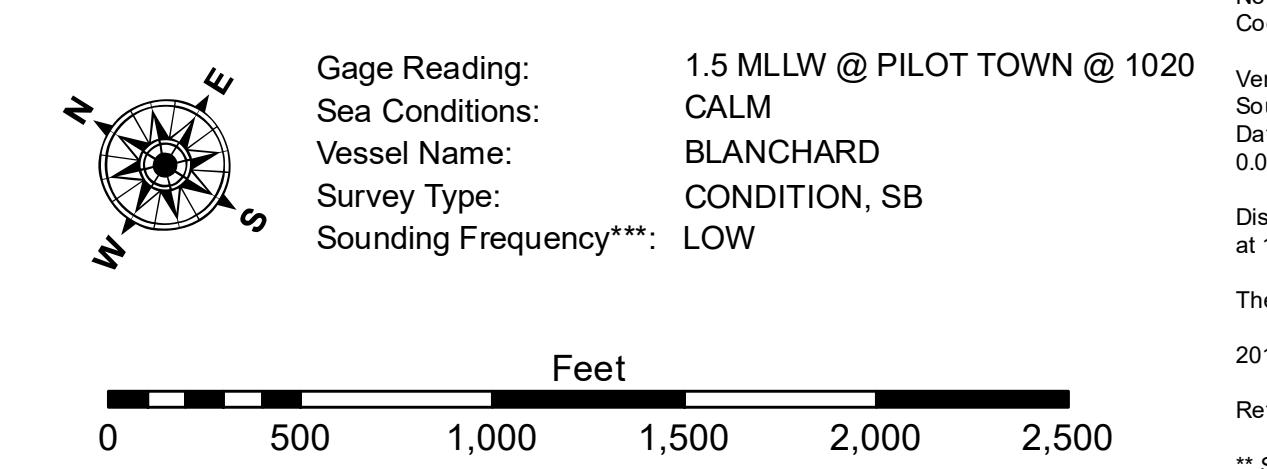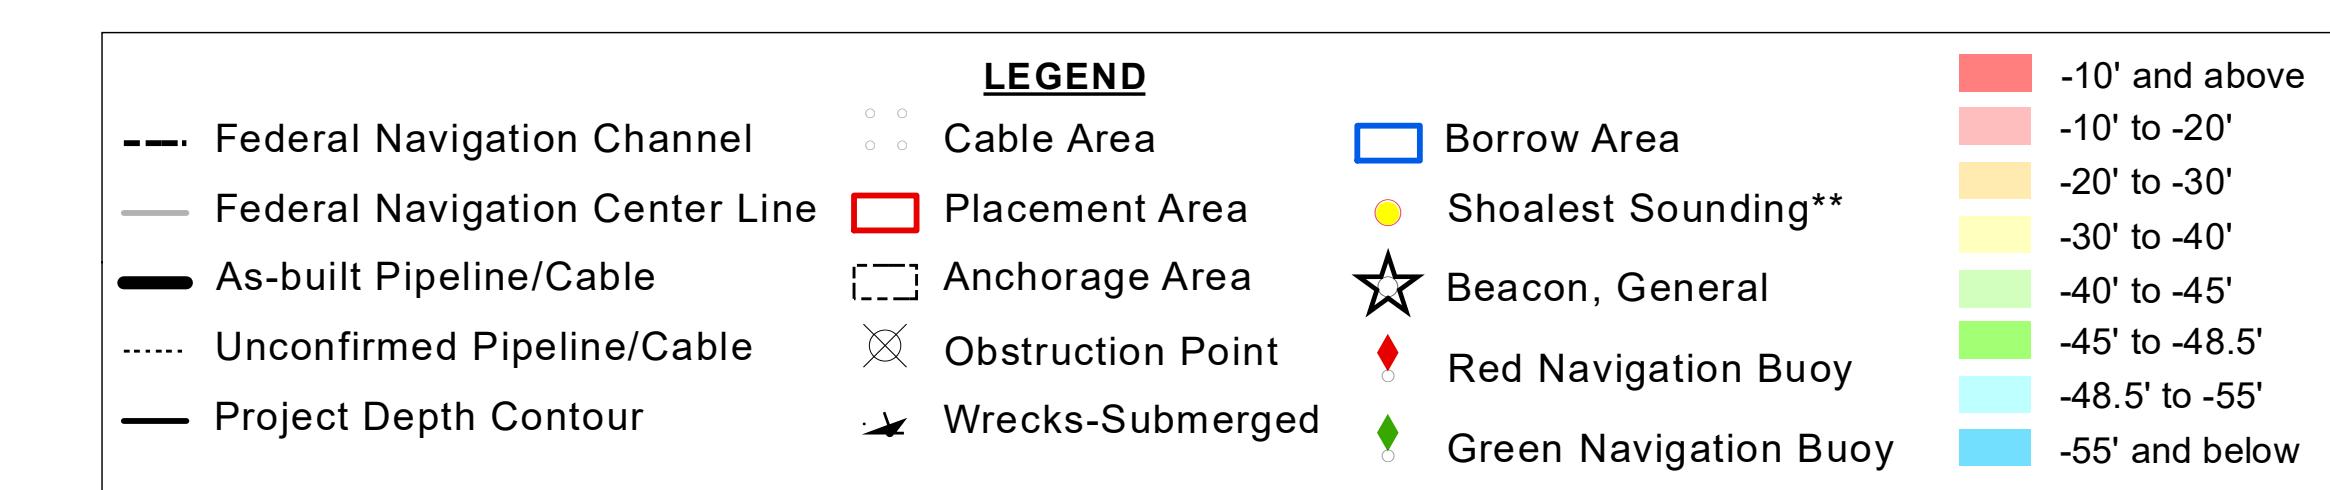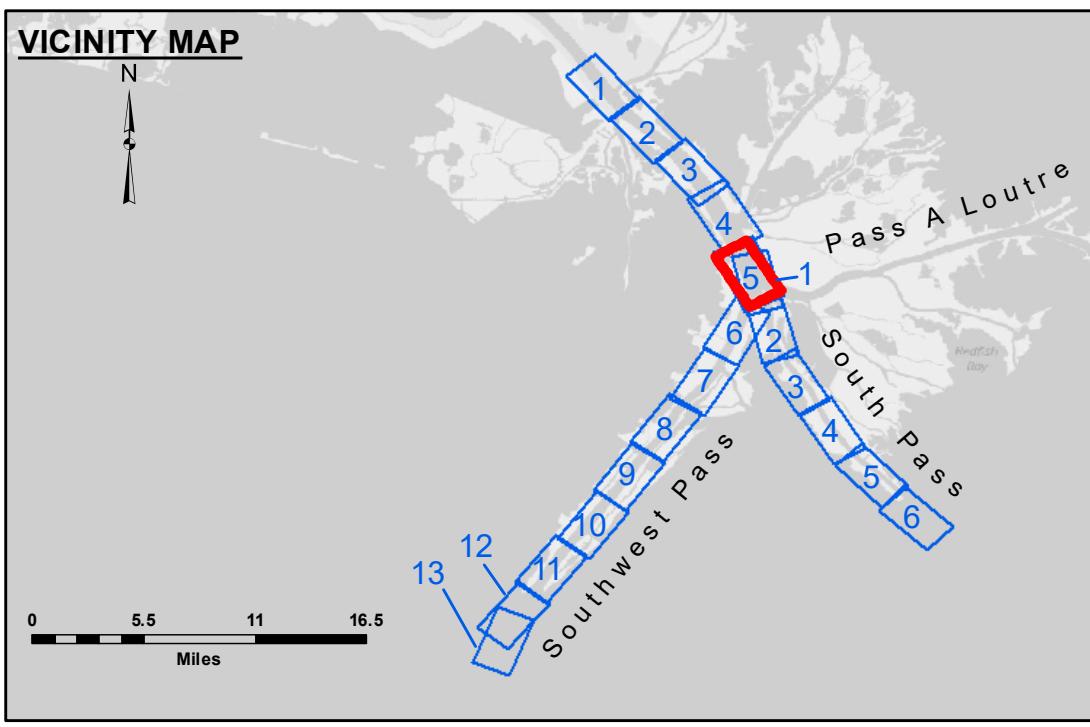

**NOTES:**  
Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum: Soundings are shown in feet and indicate depths below Mean Lower Low Water (MLLW, 07-11). Datum Relationships for gage 01525 as of July 2015:  
0.0' NAVD88 = -0.3' MLLW = 3.20' MLG

Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.

The location of navigation aids are base on and provided by the U.S. Coast Guard.

2016 Aerial Photography data source: Precision Aerial Reconnaissance, LLC (1998 DOQQ in green)

Reference is N.O.A.A. Navigation Chart No. 11361.

\*\* Shoal sounding per quarter per reach.

\*\*\* High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (24 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

Sheet Reference Number  
5 of 13

Revision Number:  
3.12-20160811