
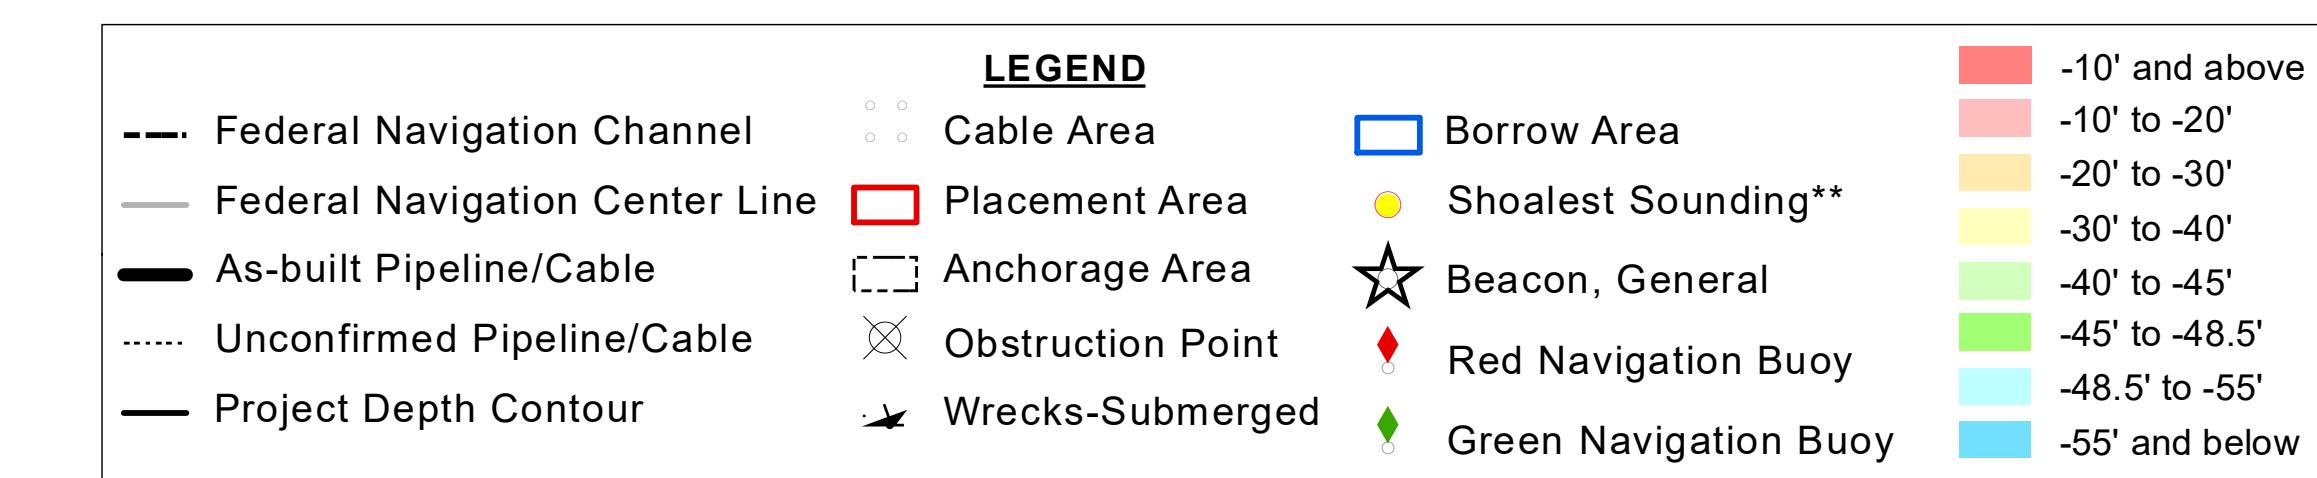


US Army Corps of Engineers
District: CEMVN

DISCLAIMER:
Access Constraints: The United States Government furnishes these data and the recipient corps and uses them with the express understanding that the U.S. Government makes no warranties, expressed or implied, concerning the accuracy, reliability or fitness for a particular purpose of the information and the data furnished. The United States shall be under no liability for damages resulting from the use of any information or data furnished. Any person who receives this data from the recipient agency agrees not to represent these data to anyone as other than Government provided data. The recipient may not transfer this data to others without also transferring this Disclaimer.

U.S. ARMY CORPS OF ENGINEERS	
NEW ORLEANS DISTRICT	
Surveyed By:	LLB & TDG
Protected By:	RSL
Checked By:	MSK

MISSISSIPPI RIVER - B.R. TO GULF
SOUTHWEST PASS - SHEET 5
SW_05_SWP_20180430_CS
30 April 2018

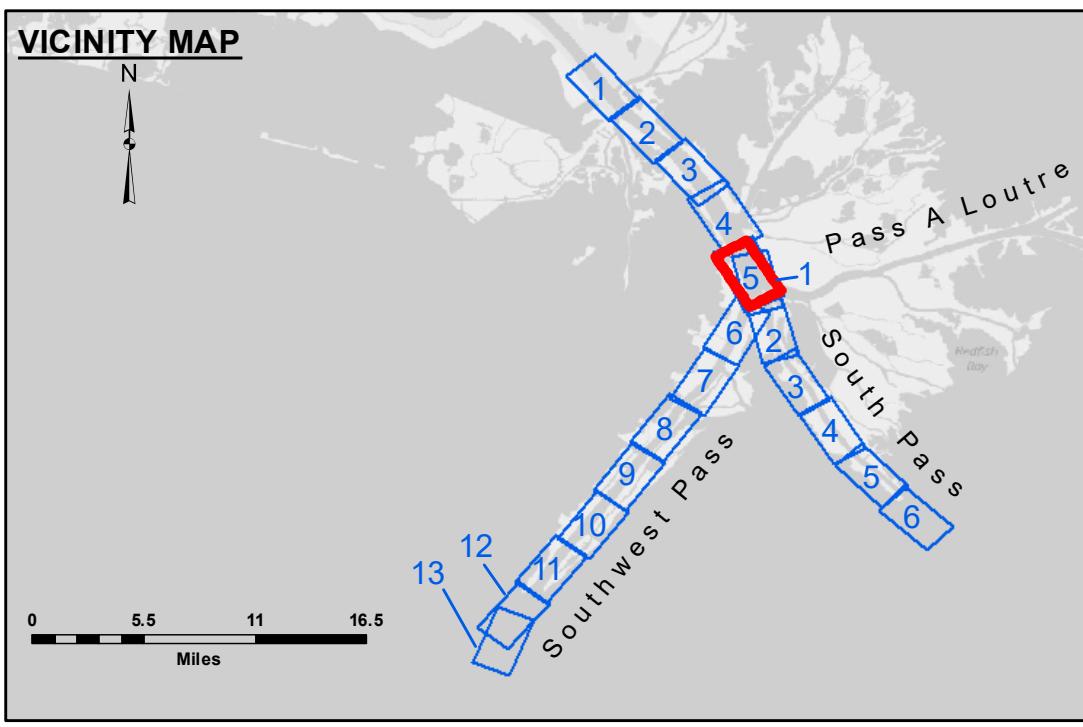

Gage Reading: 1.70 MLLW @ PILOT TOWN @ 1205
Sea Conditions: CALM, FLUFF (SAND WAVES)
Vessel Name: JOHN BOPP
Survey Type: CONDITION, SB
Sounding Frequency***: LOW

Vertical Datum: Soundings are shown in feet and indicate depths below Mean Lower Low Water (MLLW, 07-11).
Datum Relationships for gage 01525 as of July 2015:
0.0' NAVD88 = -0.3' MLLW = 3.20' MLG

Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.
The location of navigation aids are base on and provided by the U.S. Coast Guard.
2016 Aerial Photography data source: Precision Aerial Reconnaissance, LLC (1998 DOQQ in green)
Reference is N.O.A.A. Navigation Chart No. 11361.

** Shoalest Sounding per Quarter per Reach.
*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (24 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

Sheet Reference Number
5 of 13

Revision Number: 3.12-20160811