


**DREDGE WHEELER
DREDGING RANGE 38 RANGE 33
EAST HALF OF THE CHANNEL
SHEETS 4 & 5**

DATA ERROR

**DREDGE GLENN EDWARDS
DREDGING RANGE 17 TO RANGE 10
EAST TOE & 100' WEST OF THE CENTERLINE**


**DREDGE MCFARLAND
DREDGING RANGE 0 TO RANGE 4-A
EAST HALF OF THE CHANNEL**

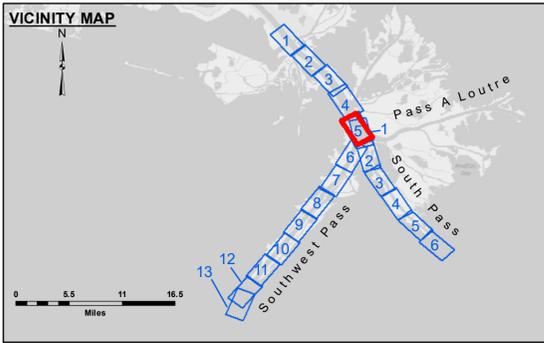

LEGEND			
--- Federal Navigation Channel	○ Cable Area	□ Borrow Area	■ -10' and above
— Federal Navigation Center Line	□ Placement Area	● Shoalest Sounding**	■ -10' to -20'
— As-built Pipeline/Cable	□ Anchorage Area	★ Beacon, General	■ -20' to -30'
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point	◆ Red Navigation Buoy	■ -30' to -40'
— Project Depth Contour	⚓ Wrecks-Submerged	◆ Green Navigation Buoy	■ -40' to -45'
			■ -45' to -48.5'
			■ -48.5' to -55'
			■ -55' and below



Gage Reading: 1.7 MLLW @ PILOT TOWN @ 1035
 Sea Conditions: CALM
 Vessel Name: TECHE
 Survey Type: CONDITION, SB
 Sounding Frequency***: LOW



NOTES:
 Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.
 Vertical Datum: Soundings are shown in feet and indicate depths below Mean Lower Low Water (MLLW, 07-11). Datum Relationships for gage 01525 as of July 2015: 0.0' NAVD88 = -0.3' MLLW = 3.20' MLG
 Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.
 The location of navigation aids are base on and provided by the U.S. Coast Guard.
 2016 Aerial Photography data source: Precision Aerial Reconnaissance, LLC (1998 DOQQ in green)
 Reference is N.O.A. Navigation Chart No. 11361.
 ** Shoalest Sounding per Quarter per Reach.
 *** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (24 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.



DISCLAIMER: The United States Government furnishes these data and the recipient accepts and uses them with the express understanding that the data are not warranted for accuracy, reliability, usability, or availability for any particular purpose of the user. The user is responsible for the results obtained from the use of the data for other than the intended purpose.
 Data Constants: Hydrographic survey data is subject to change rapidly due to several factors including but not limited to dredging operations. These data are being provided as a courtesy of the Army Corps of Engineers and are not intended to be used for any purpose other than that for which they were collected. The user is responsible for the results of the data and should not be held liable for any damage or injury resulting from the use of the data.
 The information depicted on this map represents the results of the survey and is not intended to be used for any purpose other than that for which it was collected. The user is responsible for the results of the data and should not be held liable for any damage or injury resulting from the use of the data.

Submitted:	Surveyed By: LLB & SJR
Recommended: Chief Survey Section	Plotted By:
Approved: Chief Waterways Maintenance Section	Checked By: MSK

**MISSISSIPPI RIVER - B.R. TO GULF
 SOUTHWEST PASS - SHEET 5
 SW_05_SWP_20190214_CS
 14 February 2019**

**Sheet Reference Number
 5 of 13**

Revision Number:
 3.13-20160811