



VICINITY MAP

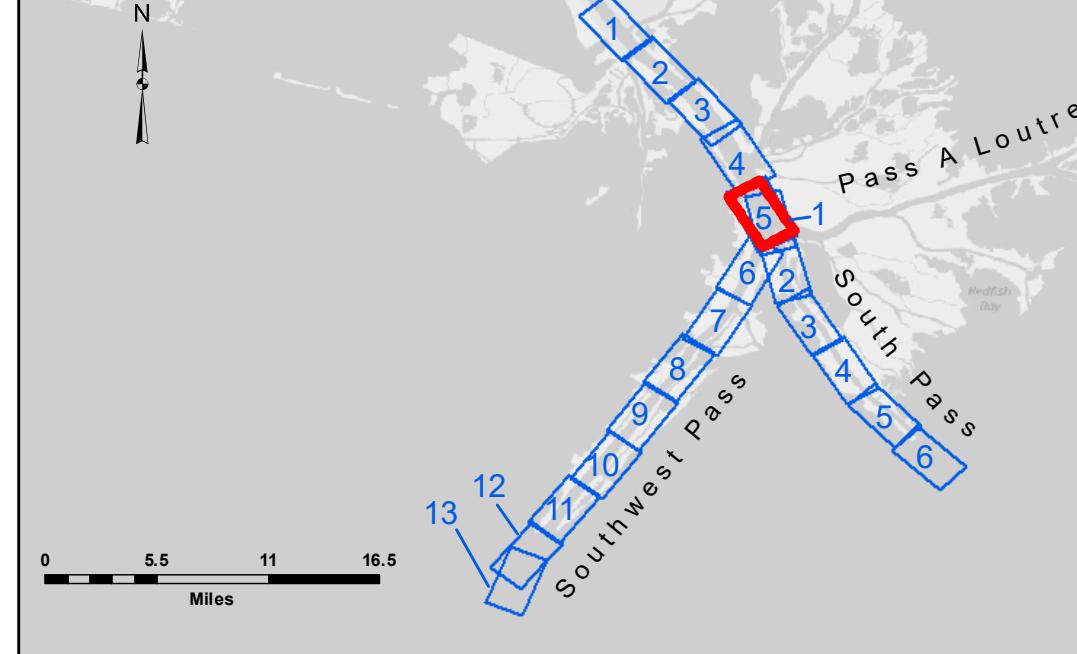


ANSWER The answer is 1000.

- Federal Navigation Channel
 - Federal Navigation Center Line
 - As-built Pipeline/Cable
 - Unconfirmed Pipeline/Cable
 - Project Depth Contour

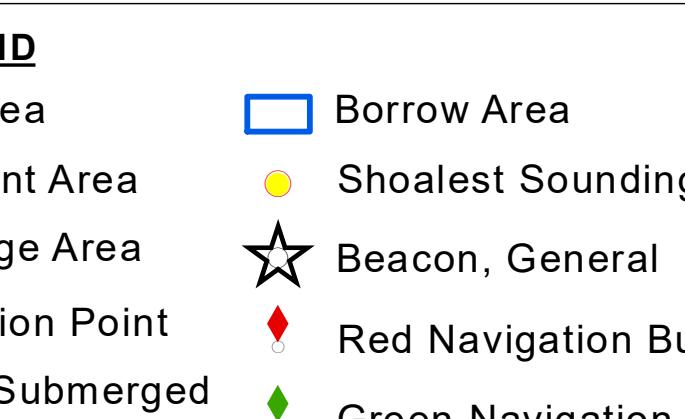

| | |
|-------------|----------------|
| Red | -10' and above |
| Pink | -10' to -20' |
| Orange | -20' to -30' |
| Yellow | -30' to -40' |
| Light Green | -40' to -45' |
| Dark Green | -45' to -48.5' |
| Cyan | -48.5' to -55' |
| Blue | 55' and below |

 Gage Reading: 2.7 MLLW @ PILOT TOWN @ 1400
Sea Conditions: CALM
Vessel Name: ROUGH
Survey Type: CONDITION, SB
Sounding Frequency***: LOW



 E
Gage Reading: 2.7 MLLW @ FISH TOWN @ 1400
Sea Conditions: CALM
Vessel Name: ROUGH
Survey Type: CONDITION, SB
Sounding Frequency***: LOW

NOTES:

Coordinate System:
American Datum of 1983 (NAD83), projected to the State Plane
System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

um:
are shown in feet and indicate depths below Mean Lower Low Water (MLLW, 07-1

are shown in feet and indicate depths below Mean Lower Low Water (MLLW). Relationships for gage 01525 as of July 2015:
8 = -0.3' MLLW = 3.20' MLG

In the Mississippi River, above and below Head of Passes are shown

Information of navigation aids are base on and provided by the U.S. Coast Guard.

Photography data source: Precision Aerial Reconnaissance, LLC (1998 DOQQ imagery)

N O A A Navigation Chart No. 11361

Sounding per Quarter per Reach.

frequency (200 kHz) survey data represents the first signal return at a sounding and will include suspended solids, known as "fluff", if present. Low frequency (24 kHz) normally penetrates through this "fluff" layer to depict elevations of consolidated bottom. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

(n) Sheet Reference Number

Number
5 - 6 - 16

5 of 13

Revision Number:
3.12-20160811