
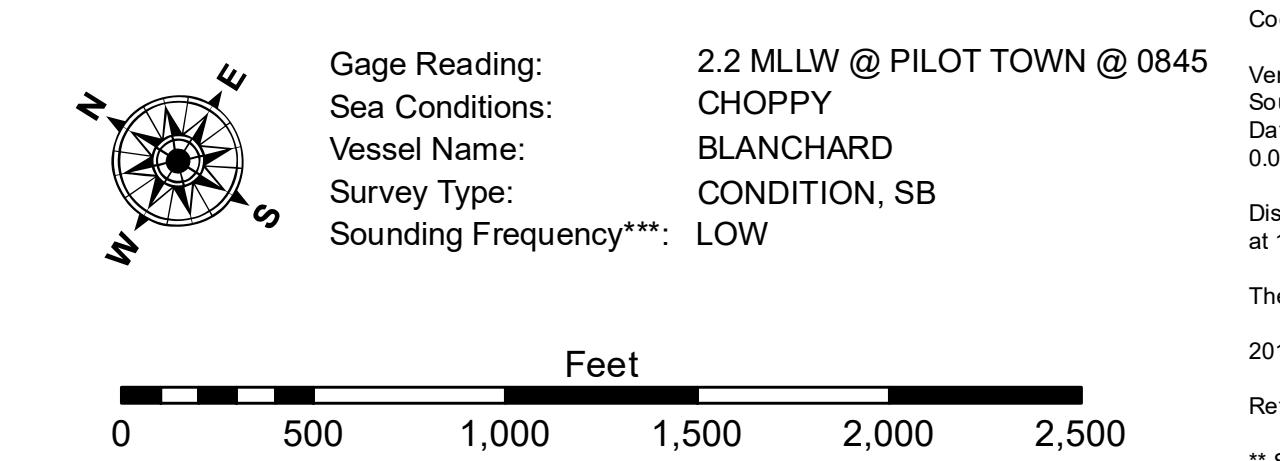
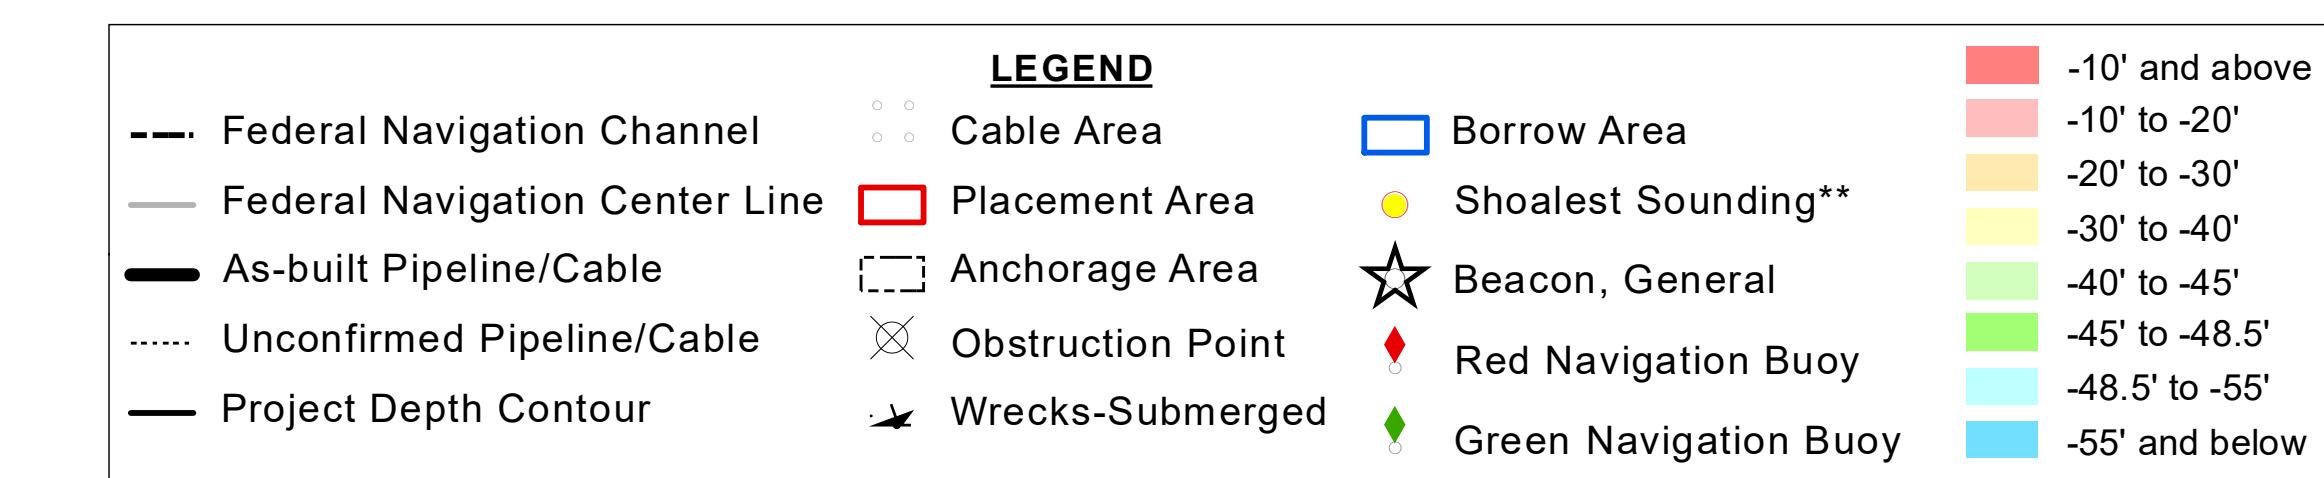


DISCLAIMER:
Access Constraints: The United States Government furnishes this data and the recipient agrees to use them with the express understanding that the U.S. Government makes no warranties, expressed or implied, concerning this data, its accuracy, reliability, or fitness for a particular purpose. The United States shall not be liable for damages resulting from the use of this data. Any person who receives this data from the United States agrees not to represent that he or she is the source of the data. The recipient also agrees not to represent that he or she has transferred this Government provided data to anyone else without the written consent of the United States.

U.S. ARMY CORPS OF ENGINEERS NEW ORLEANS DISTRICT	
Surveyed By:	JH & TDG
Protected By:	TS
Recommended:	One Survey Section
Approved:	One Waterways Maintenance Section

**MISSISSIPPI RIVER - B.R. TO GULF
SOUTHWEST PASS - SHEET 5
SW_05_SWP_20190426_CS**
26 April 2019

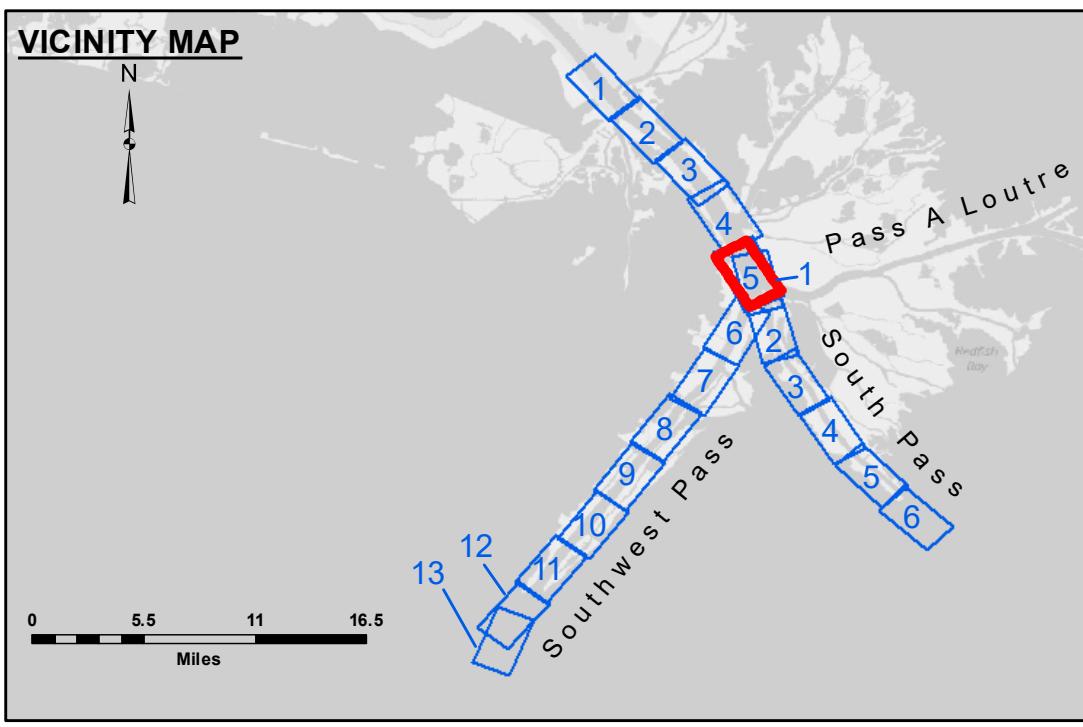

NOTES:
Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum: Soundings are shown in feet and indicate depths below Mean Lower Low Water (MLLW, 07-11).
Datum Relationships for gage 01525 as of July 2015:
0.0' NAVD88 = -0.3' MLLW = 3.20' MLG

Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.

The location of navigation aids are base on and provided by the U.S. Coast Guard.

2016 Aerial Photography data source: Precision Aerial Reconnaissance, LLC (1998 DOQQ in green)

Reference is N.O.A.A. Navigation Chart No. 11361.

** Shoalest Sounding per Quarter per Reach.

*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (24 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

Sheet Reference Number
5 of 13

Revision Number: 3.12-20160811