


VICINITY MAP



For more information about the study, please contact the study team at 1-800-258-4263 or visit www.cancer.gov.


- Federal Navigation Channel
 - Federal Navigation Center Line
 - As-built Pipeline/Cable
 - Unconfirmed Pipeline/Cable
 - Project Depth Contour

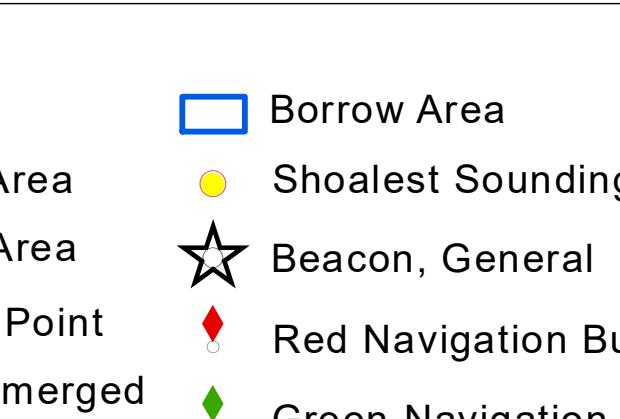

The figure shows a vertical color scale legend with seven entries, each consisting of a colored square followed by a depth range label:

- 10' and above (Red)
- 10' to -20' (Light Red)
- 20' to -30' (Yellow)
- 30' to -40' (Light Yellow)
- 40' to -45' (Light Green)
- 45' to -48.5' (Green)
- 48.5' to -55' (Cyan)
- 55' and below (Blue)

 Gage Reading: 2.9 MLLW @ PILOT TOWN @ 1105
Sea Conditions: CHOPPY
Vessel Name: BEAUV AIS
Survey Type: CONDITION, SB
Sounding Frequency***: LOW



E

S

Gage Reading: 2.9 MLLW @ PILOT TOWN @ 1100
Sea Conditions: CHOPPY
Vessel Name: BEAUV AIS
Survey Type: CONDITION, SB
Sounding Frequency***: LOW

• TES:

Coordinate System:
Datum of 1983 (NAD83), projected to the State Plane
System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

shown in feet and indicate depths below Mean Lower Low Water (MLLW, 07-11).
Elevation for gage 04525 as of July 2015:

Mississippi River, above and below Head of Passes are shown

Navigation aids are base on and provided by the U.S. Coast Guard.

Photography data source: Precision Aerial Reconnaissance, LLC (1998 DUQQ in green)

D.A.A. Navigation Chart No. 11361.

frequency (200 kHz) survey data represents the first signal return at a sounding and include suspended solids, known as "fluff", if present. Low frequency (24 kHz) normally penetrates through this "fluff" layer to depict elevations of consolidated bottom. Frequency accuracies may vary depending on channel conditions and fathometer

Sheet
Reference
Number

Revison Number:
3.12-20160811