
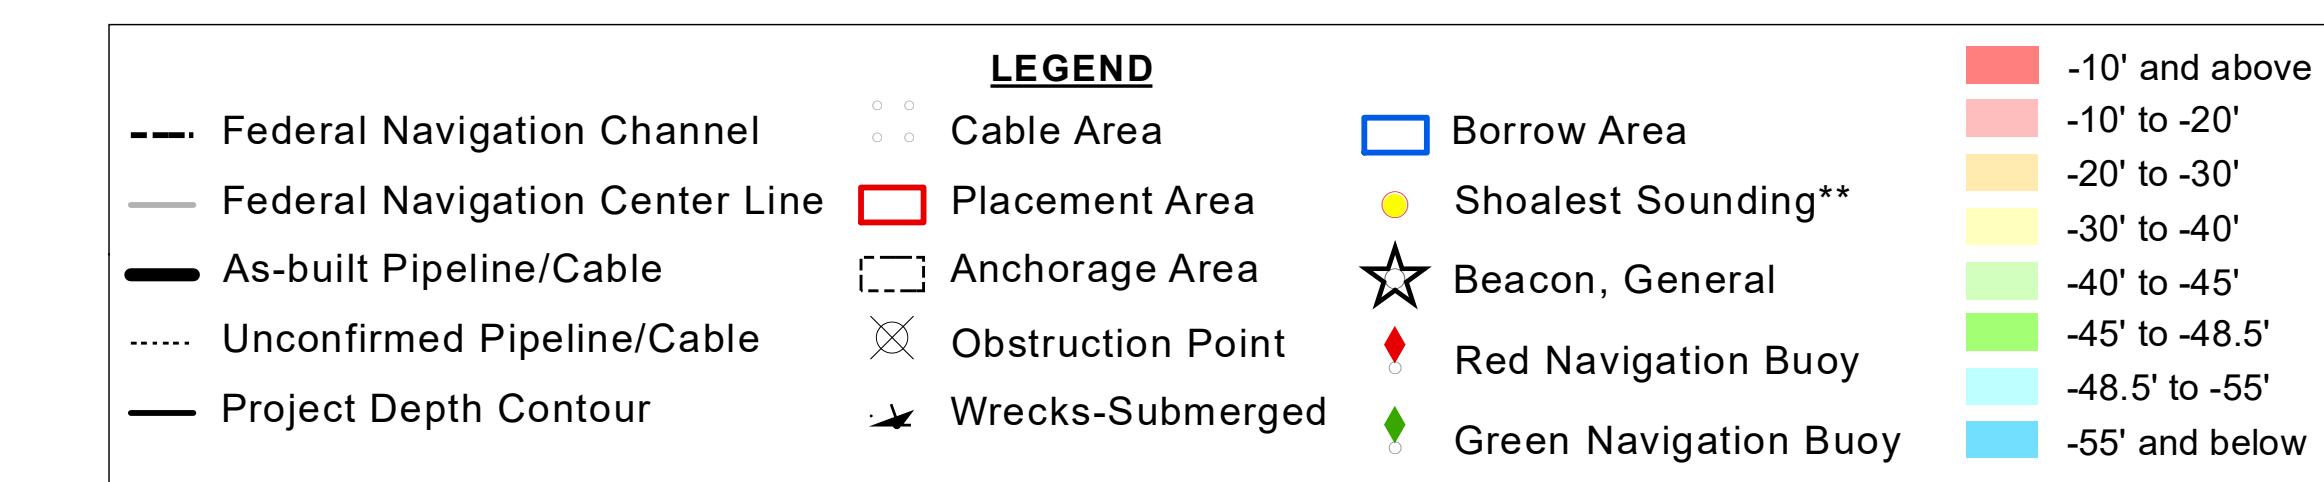


US Army Corps
of Engineers
District: CEMVN

DISCLAIMER
Access Constraints: The United States Government furnishes these data and the recipient corps and uses them with the express understanding that the US Government makes no warranties, expressed or implied, concerning the general accuracy of such information and that the recipient corps is responsible for its results. The user is responsible for any particular purpose of the information and the data furnished. The United States shall be under no liability for damages resulting from the use of any information or data furnished. Any person who receives this data agrees not to represent these data to anyone as other than the Government provided data. The recipient may not transfer these data or information without also transferring this Disclaimer.

The information depicted on this map represents the results of a survey conducted on the date indicated and can only be considered valid for the general conditions existing at the time. It is not to be used for engineering purposes or as a legal boundary. The data is intended for use by the Army Corps of Engineers and its contractors only. The data is subject to change rapidly due to several factors including burial, shifts in dredging activities, and changes in hydrographic conditions. The Army Corps of Engineers does not guarantee the accuracy of this data. The data is provided "as is" and the Army Corps of Engineers does not warrant its accuracy or reliability. The Army Corps of Engineers does not accept responsibility for any damages resulting from the use of this data.

**MISSISSIPPI RIVER - B.R. TO GULF
SOUTHWEST PASS - SHEET 5
SW_05_SWP_20190810_CS**
10 August 2019

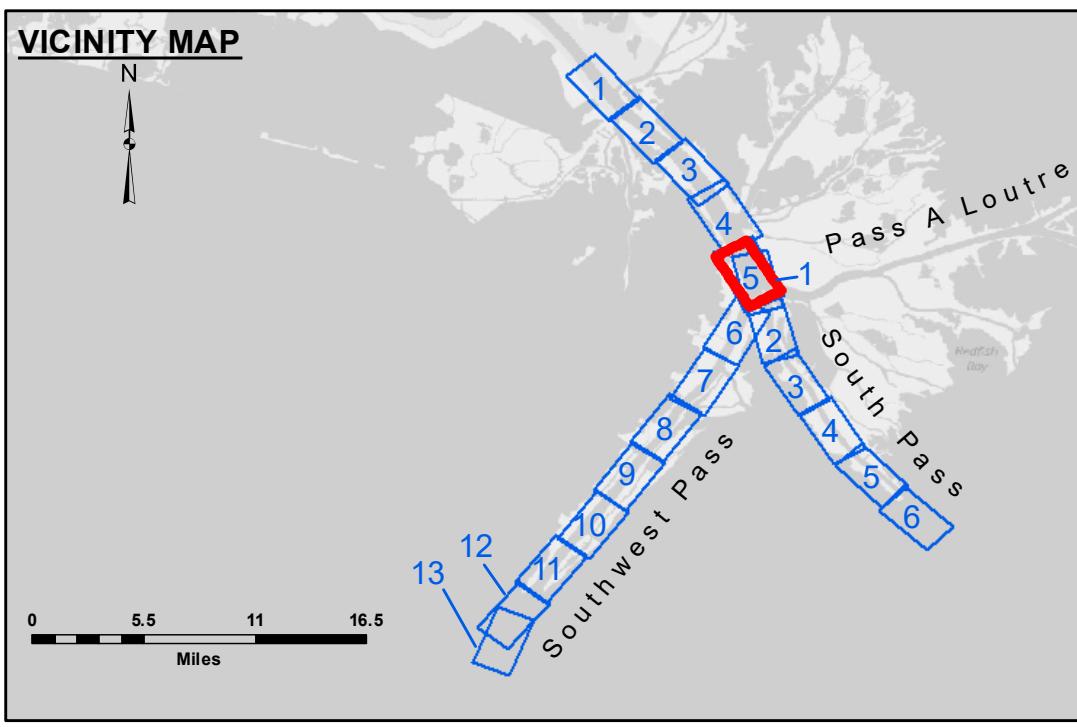

Gage Reading: 1.70 MLLW @ PILOT TOWN @ 0940
Sea Conditions: CALM
Vessel Name: BEAAVIS
Survey Type: CONDITION, SB
Sounding Frequency***: LOW

0 500 1,000 1,500 2,000 2,500 Feet

NOTES:
Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.
Vertical Datum: Soundings are shown in feet and indicate depths below Mean Lower Low Water (MLLW, 07-11).
Datum Relationships for gage 01525 as of July 2015:
0.0' NAVD88 = -0.3' MLLW = 3.20' MLG

Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.
The location of navigation aids are base on and provided by the U.S. Coast Guard.

2016 Aerial Photography data source: Precision Aerial Reconnaissance, LLC (1998 DOQQ in green)
Reference is N.O.A.A. Navigation Chart No. 11361.

** Shoalest Sounding per Quarter per Reach.
*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (24 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

Sheet
Reference
Number
5 of 13

Revision Number:
3.12-20160811