



DREDGE PADRE ISLAND
DREDGING STATION 3070+00 TO STATION 100+00
FULL CHANNEL WIDTH

PILOT TOWN ANCHORAGE
An area approximately 5.2 miles in length along the right descending bank or west side of the river. The east limit of the anchorage area at the upstream end starts at a point approximately 1,500 feet from the east bank at Mile 67 above Head of Passes and extends downstream generally parallel to and 1,500 feet from the east bank line to a point directly opposite Old Quarantine Station Light at Mile 37 above Head of Passes, thence to a point 1,500 feet directly opposite Cubitts Gap Light at Mile 28 above Head of Passes, thence to a point 1,500 feet directly opposite Pilot town Wingdam Light at Mile 15 above Head of Passes, which is the downstream limit of the anchorage area.

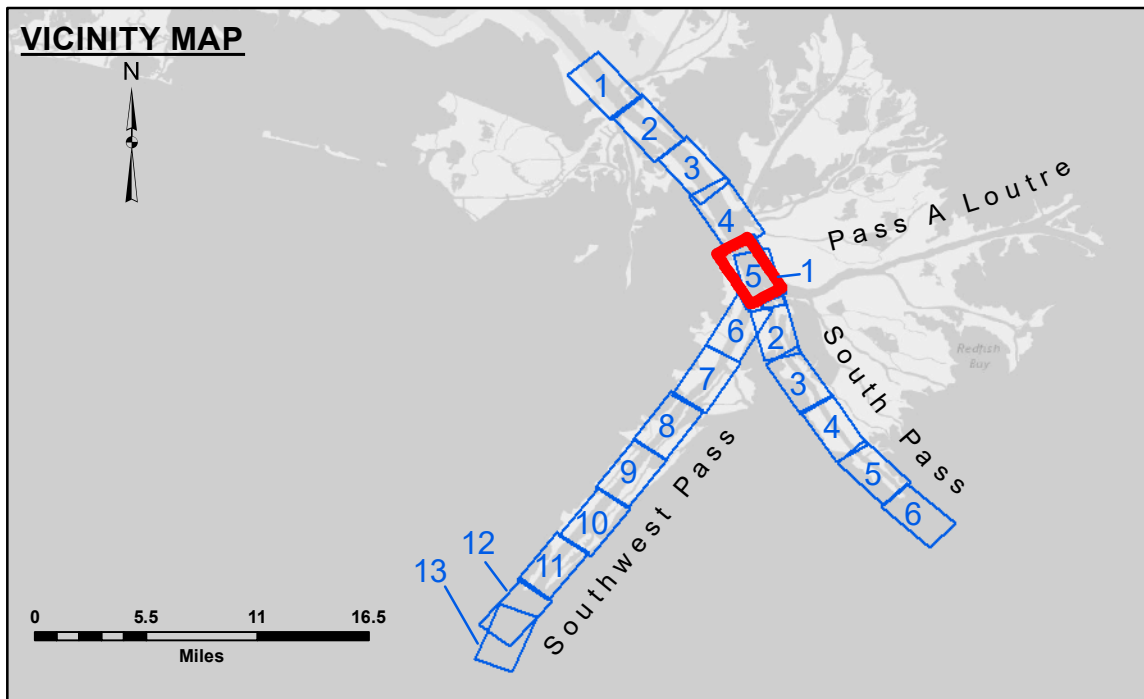

LEGEND			
--- Federal Navigation Channel	○ Cable Area	□ Borrow Area	■ -10' and above
— Federal Navigation Center Line	□ Placement Area	● Shoalest Sounding**	■ -10' to -20'
— As-built Pipeline/Cable	□ Anchorage Area	★ Beacon, General	■ -20' to -30'
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point	◆ Red Navigation Buoy	■ -30' to -40'
— Project Depth Contour	⚓ Wrecks-Submerged	◆ Green Navigation Buoy	■ -40' to -45'
			■ -45' to -50'
			■ -50' to -55'
			■ -55' and below



Gage Reading: 1.0 MLLW @ PILOT TOWN @ 0915
Sea Conditions: CALM
Vessel Name: OB-173
Survey Type: CONDITION, SB
Sounding Frequency***: LOW



NOTES:
Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.
Vertical Datum: Soundings are shown in feet and indicate depths below Mean Lower Low Water (MLLW, 12-16). Datum Relationships for gage 01525 as of March 2020: 0.0' NAVD88, 2009.55 = -0.53' MLLW = 2.97' MLG
Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.
The location of navigation aids are base on and provided by the U.S. Coast Guard.
2022 Aerial Photography data source: Optimal GEO (1998 DOQQ in green)
Reference is N.O.A. Navigation Chart No. 11361.
** Shoalest Sounding per Quarter Per Reach.
*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (24 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.



US Army Corps of Engineers District: CEMVN

DISCLAIMER: The United States Government furnishes these data and the recipient accepts and uses them with the express understanding that the data are not to be used for any purpose other than that for which they were prepared, or implied concerning the accuracy, completeness, reliability, usability or suitability for any particular purpose of the recipient. The recipient understands that the data are provided under no liability whatsoever to any person by reason of any use, and that the recipient shall be responsible for any damage or injury that may result from the use of these data. The recipient shall not transfer these data to others without also transferring this Disclaimer. The information depicted on this map represents the results of a survey conducted by the United States Army Corps of Engineers. It is not to be used for any purpose other than that for which it was prepared. The recipient understands that the data are provided under no liability whatsoever to any person by reason of any use, and that the recipient shall be responsible for any damage or injury that may result from the use of these data. The recipient shall not transfer these data to others without also transferring this Disclaimer. The information depicted on this map represents the results of a survey conducted by the United States Army Corps of Engineers. It is not to be used for any purpose other than that for which it was prepared. The recipient understands that the data are provided under no liability whatsoever to any person by reason of any use, and that the recipient shall be responsible for any damage or injury that may result from the use of these data. The recipient shall not transfer these data to others without also transferring this Disclaimer.

Submitted:	Reviewed:	Approved:
Surveyed By: JUC & LLB	Plotted By: TSS	Checked By: MSK
U.S. ARMY CORPS OF ENGINEERS NEW ORLEANS DISTRICT		
Sheet Survey Section		
Chief, Waterways Maintenance Section		

**MISSISSIPPI RIVER - B.R. TO GULF
SOUTHWEST PASS - SHEET 5
SW_05_SWP_20230608_CS_HDDA
08 June 2023**

**Sheet Reference Number
5 of 13**

Revision Number:
4.2-30204920