


Disclaimer: The data represents the results of data collection/processing for a specific US Army Corps of Engineers activity and is not intended for use in any other application. The user is responsible for the results of any application of the data for other than its intended purpose. The US Army Corps of Engineers does not warrant the accuracy of the data for any other use. The user is responsible for the results of any application of the data for other than its intended purpose. The US Army Corps of Engineers does not warrant the accuracy of the data for any other use.

DISCLAIMER: The United States Government furnishes these data and the recipient accepts and uses them with the express understanding that the data are not intended for use in any other application. The user is responsible for the results of any application of the data for other than its intended purpose. The US Army Corps of Engineers does not warrant the accuracy of the data for any other use. The user is responsible for the results of any application of the data for other than its intended purpose. The US Army Corps of Engineers does not warrant the accuracy of the data for any other use.


Submitted:	Surveyed By:	JTB & DED
Recommended:	Plotted By:	TSS
Approved:	Chief, Survey Section	MSK
Checked By:	Other, Waterways Maintenance Section	

**MISSISSIPPI RIVER - B. R. TO GULF
SOUTHWEST PASS - SHEET 7
SW_07_SWPX_20241001_CS
01 October 2024**


**Sheet
Reference
Number
7 of 13**

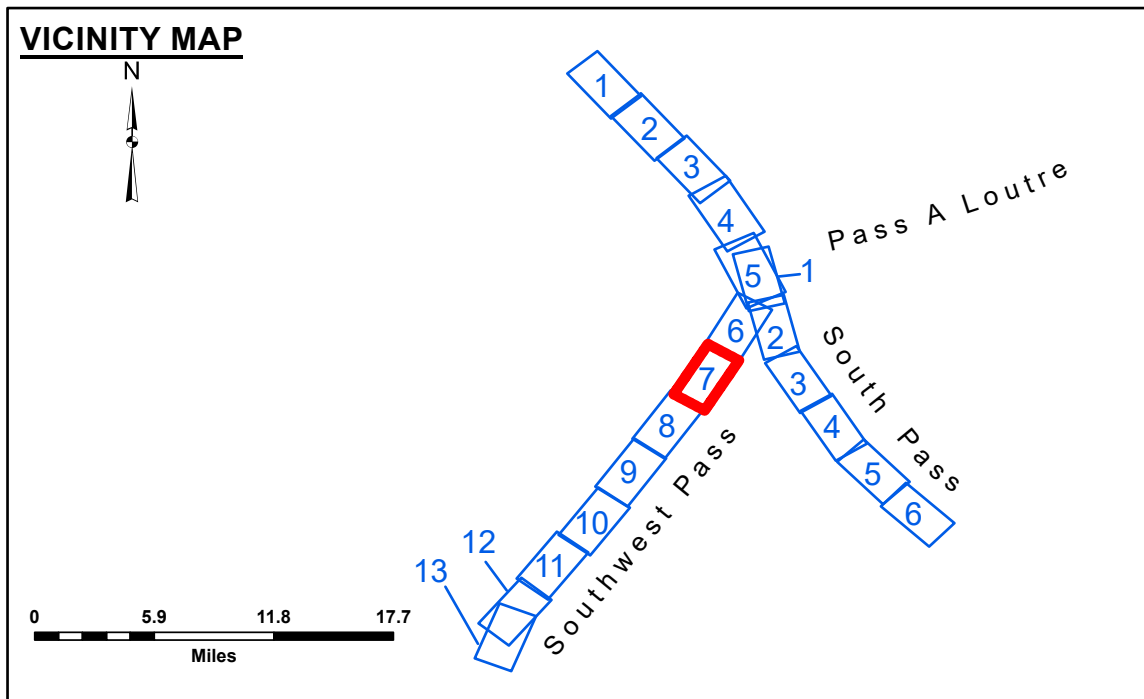

LEGEND	
--- Federal Navigation Channel	3 Fluff Thickness (feet)*
— Federal Navigation Center Line	□ Borrow Area
— As-built Pipeline/Cable	● Shoalest Sounding**
..... Unconfirmed Pipeline/Cable	★ Beacon, General
— Project Depth Contour	◆ Red Navigation Buoy
○ Cable Area	◆ Green Navigation Buoy
□ Placement Area	■ -10' and above
□ Anchorage Area	■ -10' to -20'
⊗ Obstruction Point	■ -20' to -30'
★ Wrecks-Submerged	■ -30' to -40'
	■ -40' to -45'
	■ -45' to -50'
	■ -50' to -55'
	■ -55' and below



Gage Reading: 1.2 MLLW @ H.O.P. (01545 OD) @ 0855
 Sea Conditions: CALM
 Vessel Name: OB-173
 Survey Type: CONDITION, SB
 Sounding Frequency***: LOW

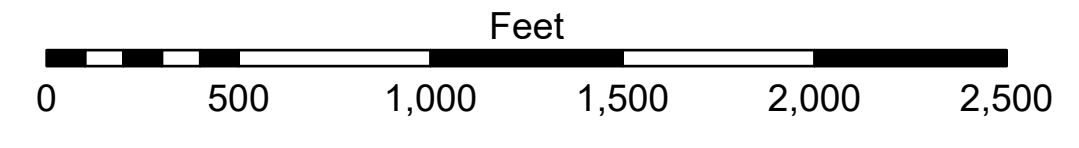

NOTES:
 Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.
 Vertical Datum: Mean Lower Low Water (MLLW, 12-16).
 Soundings are shown in feet and indicate depths below Mean Lower Low Water (MLLW, 12-16). Datum Relationships for gage 01545 as of March 2020: 0.0' NAVD86, 2009.55 = -0.32' MLLW = 3.16' MLG
 Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.
 The location of navigation aids are base on and provided by the U.S. Coast Guard.
 2024 Aerial Photography data source: Optimal GEO (1998 DOQQ in green)
 Reference is N.O.A.A. Navigation Chart No. 11361.
 ** Shoalest Sounding per Quarter per Reach.
 *** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (24 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.