

Disclaimer: The data represents the results of data collection/processing for a specific US Army Corps of Engineers activity and is not intended for use for any other purpose. The user is responsible for the results of any application of the data for other than its intended purpose. The user is responsible for the results of any application of the data for other than its intended purpose.

Data: The hydrographic survey data is subject to change rapidly due to several factors including but not limited to changing activity and natural shoaling and scouring processes. The U.S. Army Corps of Engineers does not warrant the accuracy of the data for any other purpose. The information depicted on this map represents the results of a survey conducted on the date indicated in the title block. The information is not intended to represent the general condition existing at that time.


DISCLAIMER: The United States Government furnishes these data and the recipient accepts and uses them with the express understanding that the recipient is not to be held responsible for any expressed, or implied, consequences of the use of the data. The recipient is responsible for the results of any application of the data for other than its intended purpose. The recipient is responsible for the results of any application of the data for other than its intended purpose.

| | |
|--------------|------------------------|
| Submitted: | Surveyed By: RCB & RCC |
| Recommended: | Plotted By: TSS |
| Approved: | Checked By: MSK |

U.S. ARMY CORPS OF ENGINEERS
NEW ORLEANS DISTRICT


**MISSISSIPPI RIVER - B. R. TO GULF
SOUTHWEST PASS - SHEET 7
SW_07_SWPX_20260324_CS
24 March 2026**

**Sheet
Reference
Number
7 of 13**

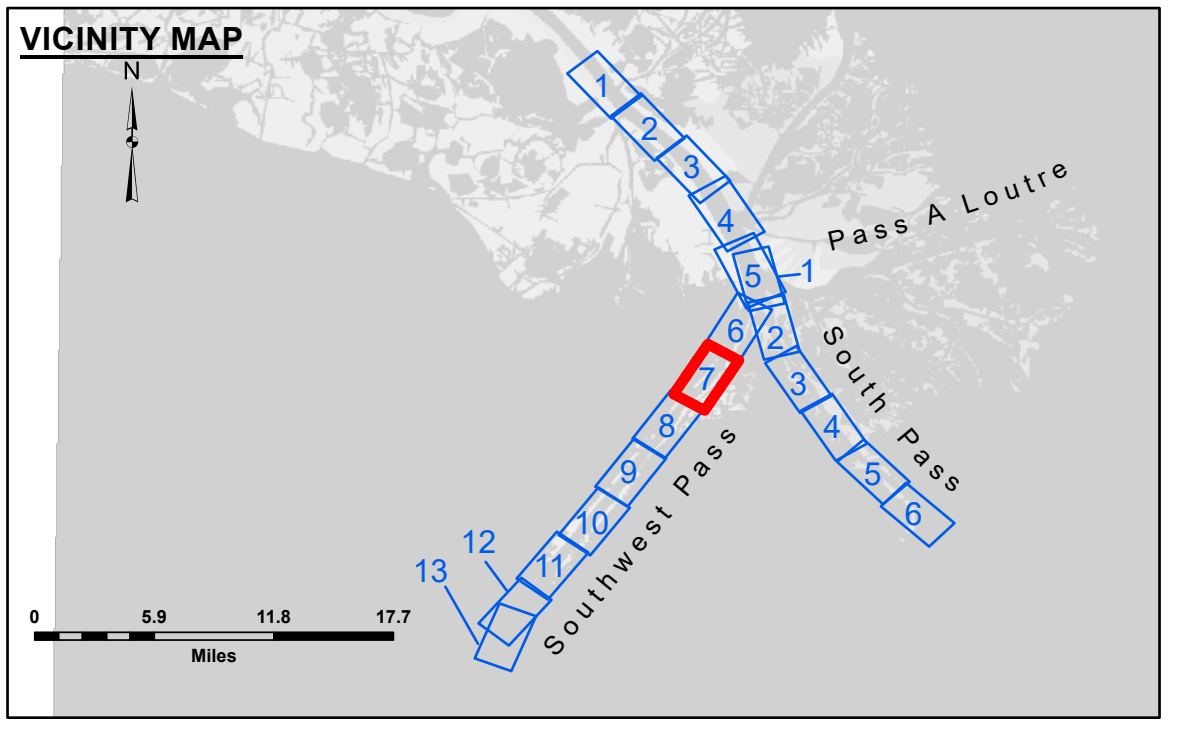


LEGEND

| | | | |
|----------------------------------|---------------------|---------------------------|------------------|
| --- Federal Navigation Channel | ● Cable Area | 3 Fluff Thickness (feet)* | ■ -10' and above |
| — Federal Navigation Center Line | □ Placement Area | □ Borrow Area | ■ -10' to -20' |
| — As-built Pipeline/Cable | ⊗ Anchorage Area | ● Shoalest Sounding** | ■ -20' to -30' |
| Unconfirmed Pipeline/Cable | ⊗ Obstruction Point | ★ Beacon, General | ■ -30' to -40' |
| — Project Depth Contour | ⊗ Wrecks-Submerged | ◆ Red Navigation Buoy | ■ -40' to -45' |
| | | ◆ Green Navigation Buoy | ■ -45' to -50' |
| | | | ■ -50' to -55' |
| | | | ■ -55' and below |



Gage Reading: 1.0 MLLW @ H.O.P. (01545 OD) @ 1000
 Sea Conditions: CALM
 Vessel Name: TOBIN
 Survey Type: CONDITION, SB
 Sounding Frequency***: LOW

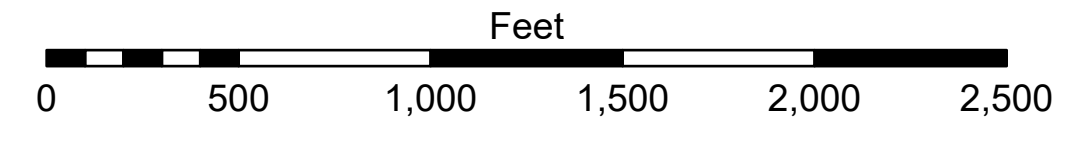

NOTES:
 Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.
 Vertical Datum: Soundings are shown in feet and indicate depths below Mean Lower Low Water (MLLW, 12-16). Datum Relationships for gage 01545 as of February 2021: 0.0' NAVD83, 2009.55 = -0.32' MLLW = 3.18' MLG
 Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.
 The location of navigation aids are based on and provided by the U.S. Coast Guard.
 2024 Aerial Photography data source: Optimal GEO (1998 DOQQ in green)
 Reference is N.O.A. Navigation Chart No. 11361.
 ** Shoalest Sounding per Quarter per Reach.
 *** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (24 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.