

Disclaimer: The data represents the results of data collection/processing for a specific US Army Corps of Engineers activity and is not intended for use in any other application. The user is responsible for the results of any application of the data for other than its intended purpose. The US Army Corps of Engineers does not warrant the accuracy of the data for any other use. The user is responsible for the results of any application of the data for other than its intended purpose. The US Army Corps of Engineers does not warrant the accuracy of the data for any other use.


DISCLAIMER: The United States Government furnishes this data and the recipient accepts and uses them with the express understanding that the data is provided for informational purposes only and is not intended for use in any other application. The recipient is responsible for the results of any application of the data for other than its intended purpose. The recipient is responsible for the results of any application of the data for other than its intended purpose.

Submitted:	Surveyed By:	JUC & RCC
Recommended:	Plotted By:	TSS
Approved:	Checked By:	MSK


U.S. ARMY CORPS OF ENGINEERS
NEW ORLEANS DISTRICT

**MISSISSIPPI RIVER - B. R. TO GULF
SOUTHWEST PASS - SHEET 7
SW_07_SWPX_20260402_CS
02 April 2026**


**Sheet
Reference
Number
7 of 13**

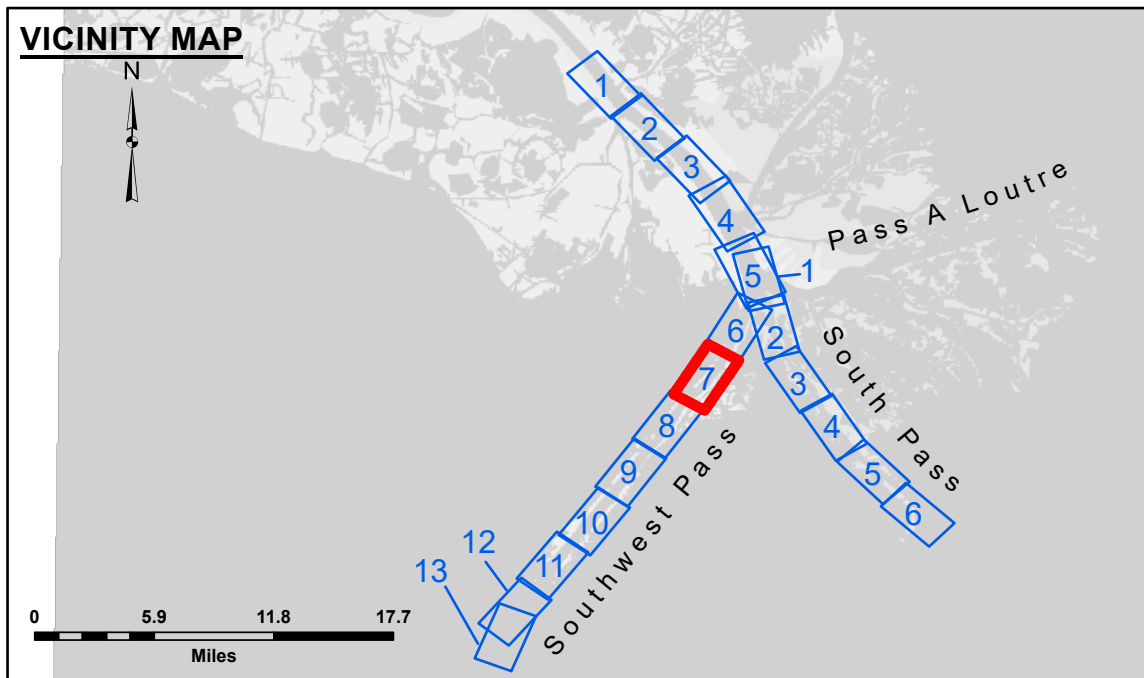

LEGEND		3 Fluff Thickness (feet)*	
--- Federal Navigation Channel	● Cable Area	■ -10' and above	
— Federal Navigation Center Line	□ Placement Area	■ -10' to -20'	
— As-built Pipeline/Cable	□ Anchorage Area	■ -20' to -30'	
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point	■ -30' to -40'	
— Project Depth Contour	⚓ Wrecks-Submerged	■ -40' to -45'	
	★ Beacon, General	■ -45' to -50'	
	◆ Red Navigation Buoy	■ -50' to -55'	
	◆ Green Navigation Buoy	■ -55' and below	
		■ Borrow Area	
		● Shoalest Sounding**	

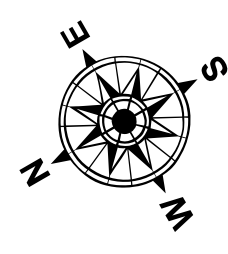

Gage Reading: 1.2 MLLW @ H.O.P. (01545 OD) @ 1000
Sea Conditions: CALM
Vessel Name: TOBIN
Survey Type: CONDITION, SB
Sounding Frequency***: LOW

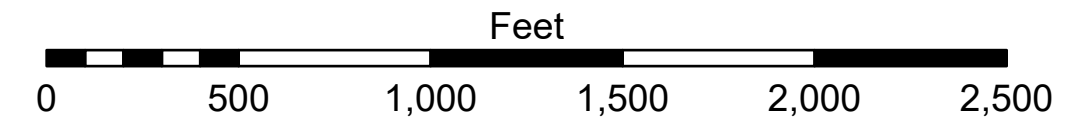

NOTES:
Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.
Vertical Datum: 2024 Aerial Photography data source: Optimal GEO (1998 DOQQ in green).
Soundings are shown in feet and indicate depths below Mean Lower Low Water (MLLW, 12-16). Datum Relationships for gage 01545 as of February 2021: 0.0' NAVD86, 2009.55 = -0.32' MLLW = 3.16' MLG
Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.
The location of navigation aids are base on and provided by the U.S. Coast Guard.
Reference is N.O.A.A. Navigation Chart No. 11361.
** Shoalest Sounding per Quarter per Reach.
*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (24 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.