


DREDGE GLENN EDWARDS  
DREDGING FULL CHANNEL WIDTH  
STA. 265+00 TO STA. 410+00

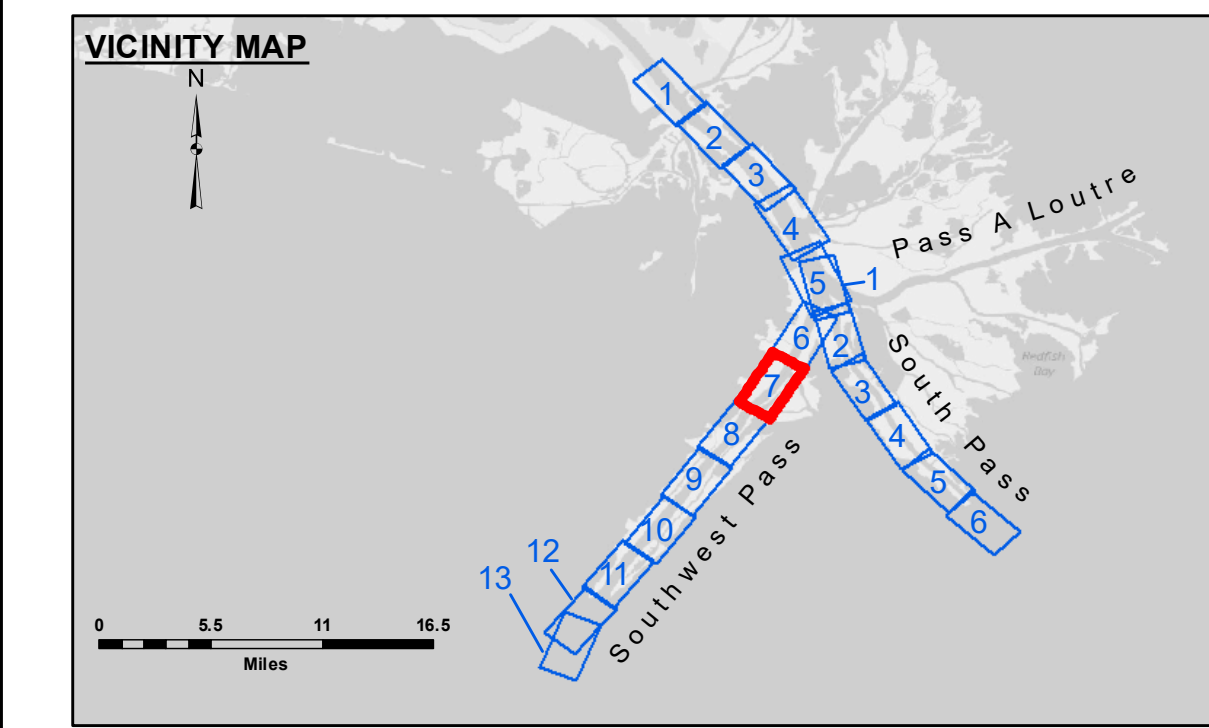

LEGEND			
	Federal Navigation Channel		Placement Area
	Federal Navigation Center Line		Anchorage Area
	As-built Pipeline/Cable		Obstruction Point
	Unconfirmed Pipeline/Cable		Wrecks-Submerged
	Project Depth Contour		Borrow Area
	Cable Area		Shoalest Sounding**
	Beacon, General		Red Navigation Buoy
	Green Navigation Buoy		Green Navigation Buoy
	-10' and above		-10' to -20'
	-20' to -30'		-30' to -40'
	-40' to -45'		-45' to -50'
	-50' to -55'		-55' and below

Gage Reading: 1.2 MLLW @ H.O.P.(01545 OD) @ 1105

Sea Conditions: ROUGH

Vessel Name: TOBIN

Survey Type: CONDITION, SB

Sounding Frequency\*\*\*: LOW

**Notes:**  
Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.  
Vertical Datum: Soundings are shown in feet and indicate depths below Mean Lower Low Water (MLLW, 12-16). Datum Relationships for gage 01545 as of March 2020: 0.0' NAVD88, 2009.55 = -0.32' MLLW = 3.18' MLG  
Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.  
The location of navigation aids are based on and provided by the U.S. Coast Guard.  
2022 Aerial Photography data source: Optimal GEO (1998 DOQQ in green)  
Reference is N.O.A. Navigation Chart No. 11361.  
\*\* Shoalest Sounding per Quarter per Reach.  
\*\*\* High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (24 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.



**DISTRIBUTION LIABILITY:** The data represents the results of data collection/processing for a specific US Army Corps of Engineers project. It is only valid for its intended use, content, time and accuracy specifications. The user is responsible for the results of their use. Approximation of the state for other than its intended purpose.  
Data Constants: Hydrographic survey data is subject to change rapidly due to several factors including but not limited to dredging operations, channel shifts, and other factors. Therefore, the information depicted on this map represents the results of a specific survey and should not be used for navigation or other purposes. The information depicted on this map represents the results of a specific survey and should not be used for navigation or other purposes. The information depicted on this map represents the results of a specific survey and should not be used for navigation or other purposes.

U.S. ARMY CORPS OF ENGINEERS NEW ORLEANS DISTRICT		
Submitted:	Surveyed By: JH & RCC	Checked By: MSK
Recommended:	Plotted By: RSL	
Approved:	Chief, Survey Section	Chief, Waterways Maintenance Section

**MISSISSIPPI RIVER - B.R. TO GULF  
SOUTHWEST PASS - SHEET 7  
SW\_07\_SWP\_20240325\_CS  
25 March 2024**

**Sheet Reference Number  
7 of 13**

Revision Number:  
4.2-202(04/20)