


221,000 3,940,000 218,000 3,937,000 215,000 212,000 3,934,000



DREDGE GLENN EDWARDS
DREDGING STATION 115+00 TO STATION 380+00
FULL CHANNEL WIDTH SHEETS 6 & 7

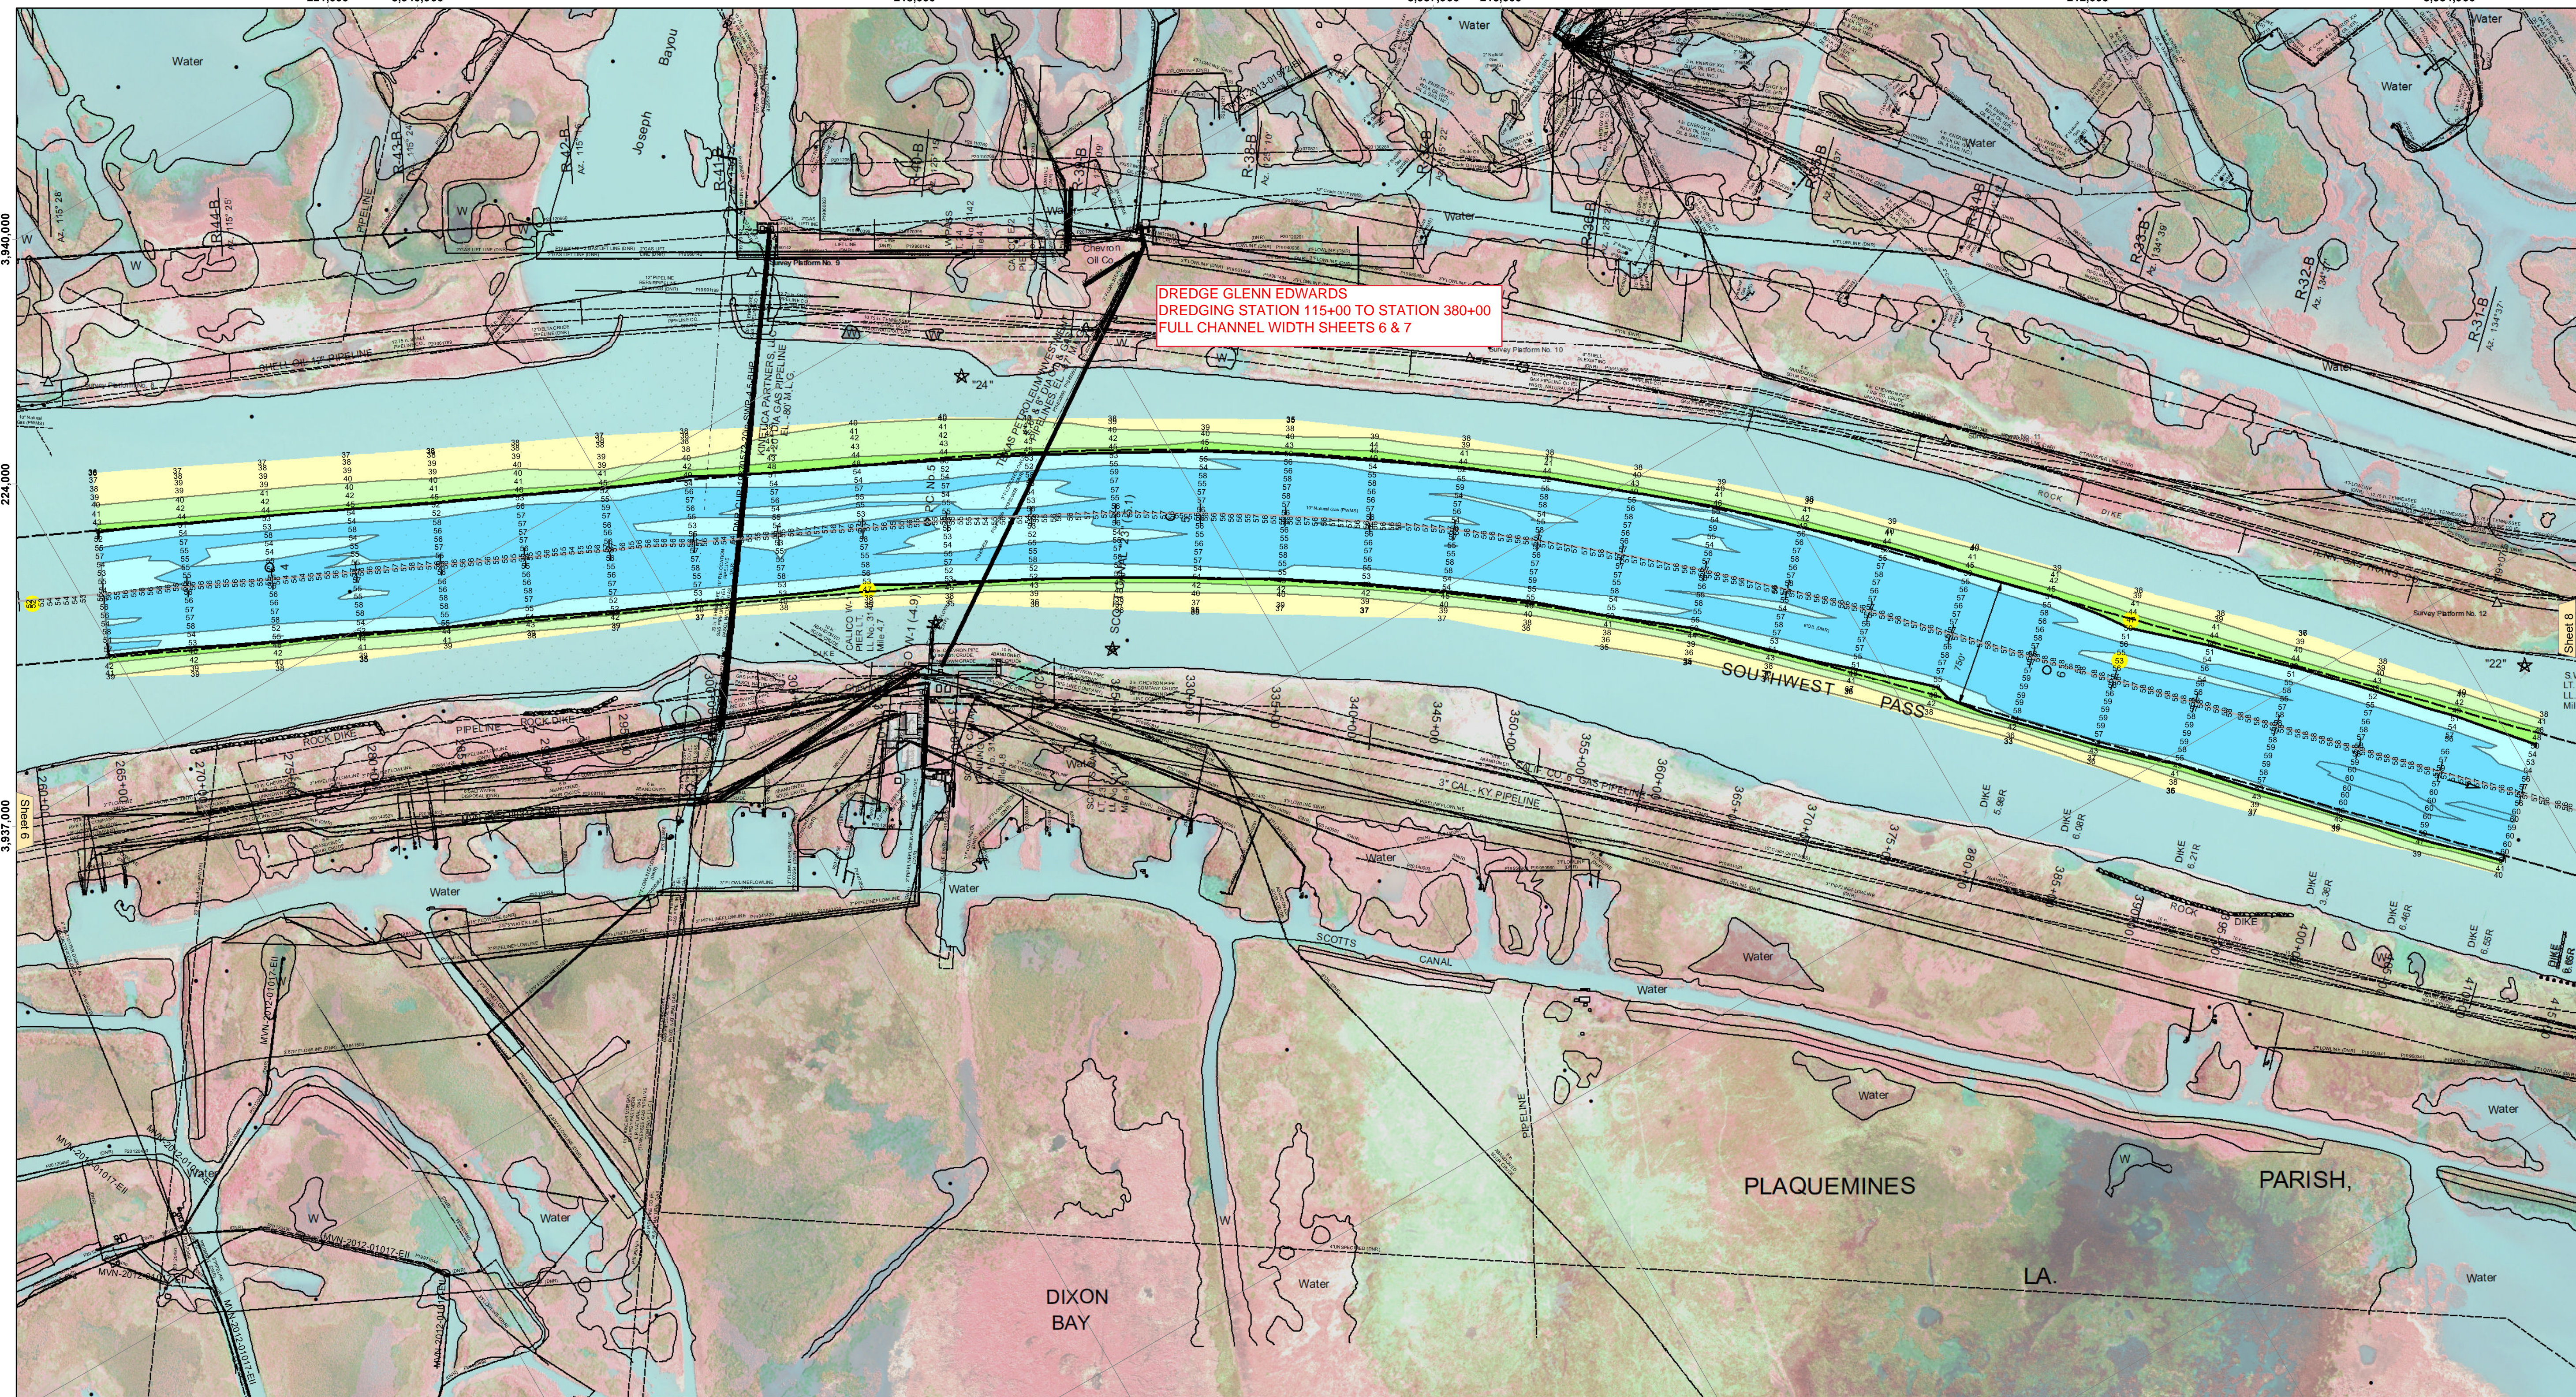


Distribution Liability: The data represents the results of data collection... The user is responsible for the results and accuracy of the data... The user is responsible for the results and accuracy of the data... The user is responsible for the results and accuracy of the data...

Access Constraints: The United States Government furnishes these data and the recipient agrees to use them with the express understanding that the data are provided for informational purposes only... The recipient may not transfer, disseminate, or otherwise use these data for purposes not intended by the Government...


Table with 3 columns: Submitted, Recommended, Approved. Row 1: Submitted by JTB & DBD, Recommended by TSS, Approved by MSK.

MISSISSIPPI RIVER - B. R. TO GULF
SOUTHWEST PASS - SHEET 7
SW_07_SWP_20240515_CS
15 May 2024


Sheet Reference Number
7 of 13

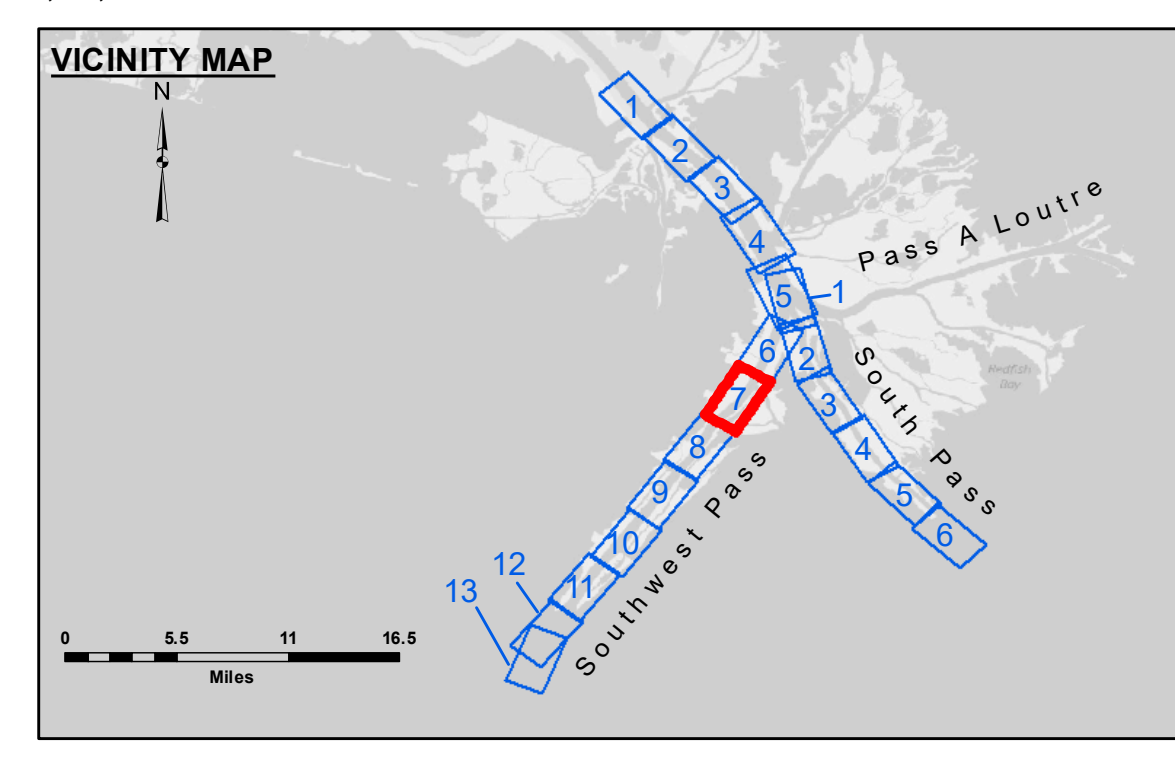

LEGEND table with 4 columns: Line styles (Federal Navigation Channel, As-built Pipeline/Cable, etc.), Symbols (Cable Area, Anchorage Area, etc.), Colors (Borrow Area, Shoalest Sounding, etc.), and Depth Ranges (-10' and above to -55' and below).

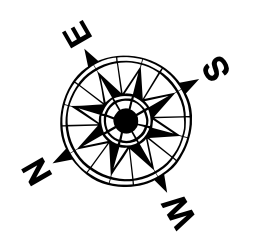

Gage Reading: 1.1 MLLW @ H.O.P. (01545 OD) @ 0944
Sea Conditions: CALM
Vessel Name: BLANCHARD
Survey Type: CONDITION, SB
Sounding Frequency***: LOW

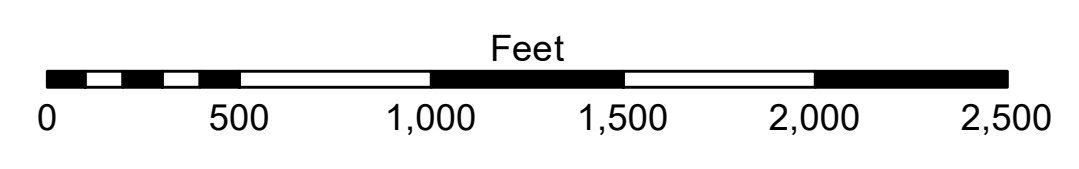

NOTES:
Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.
Vertical Datum: 12.12 MLLW @ H.O.P. (01545 OD) @ 0944
Soundings are shown in feet and indicate depths below Mean Lower Low Water (MLLW, 12-16). Datum Relationships for gage 01545 as of March 2020: 0.0' NAVD88, 2009.55 = -0.32' MLLW = 3.18' MLG
Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.
The location of navigation aids are based on and provided by the U.S. Coast Guard.
2022 Aerial Photography data source: Optimal GEO (1998 DOQQ in green)
Reference is N.O.A. Navigation Chart No. 11361.
*** Shoalest Sounding per Quarter per Reach.
*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (24 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.