


Distribution Liability: The data represents the results of data collection/processing for a specific US Army Corps of Engineers project. It is not to be used for any purpose other than that for which it was prepared. The user is responsible for the results and accuracy of the data. The Corps of Engineers does not accept responsibility for changes in the data or for damage to property or equipment resulting from the use of the data. The Corps of Engineers does not accept responsibility for changes in the data or for damage to property or equipment resulting from the use of the data.

Access/Restrictions: The United States Government furnishes these data and the recipient accepts and uses them with the express understanding that they are for official use only. The recipient agrees to indemnify and hold the United States Government harmless from and against all claims, damages, losses, and expenses, including reasonable attorney's fees, that may be incurred by the United States Government as a result of the use of these data for any purpose other than that for which they were prepared. The recipient may not disseminate these data or any information derived therefrom without the express written consent of the United States Government. The recipient may not transfer these data to others without also transmitting the Disclaimer.

Submitted:	Surveyed By: JH & DBD
Recommended:	Plotted By: TSS
Approved:	Checked By: MSK

U.S. ARMY CORPS OF ENGINEERS
NEW ORLEANS DISTRICT

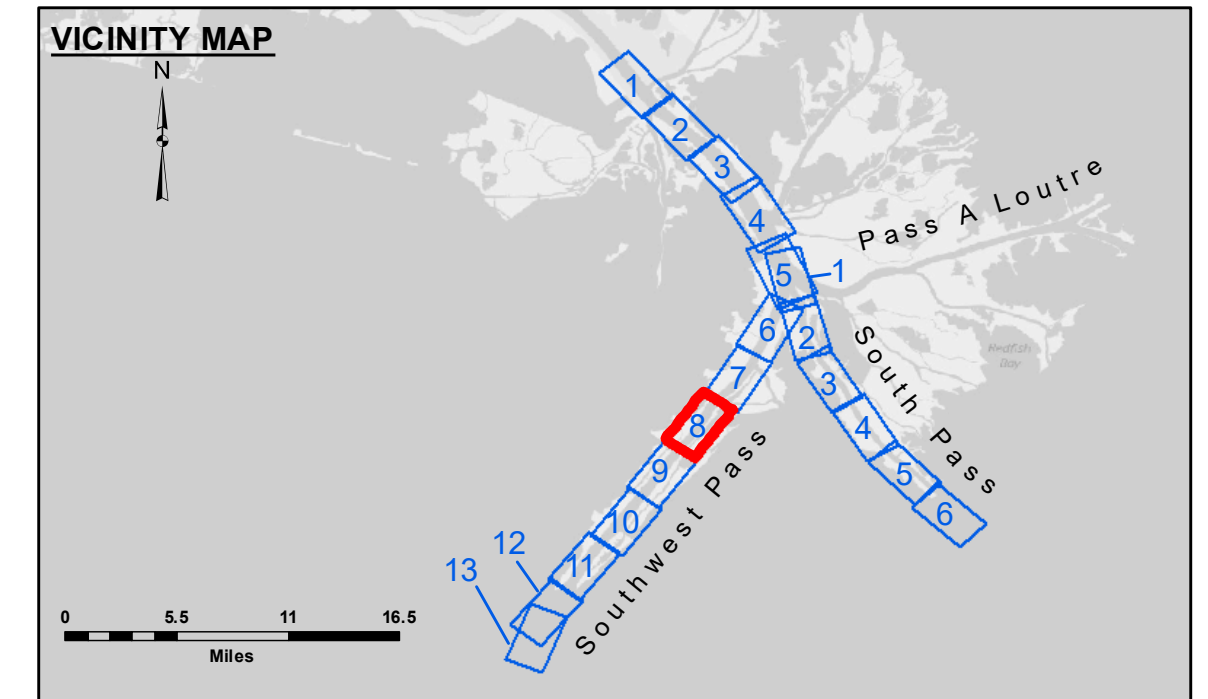

LEGEND

--- Federal Navigation Channel	○ Cable Area	□ Borrow Area	■ -10' and above
— Federal Navigation Center Line	■ Placement Area	● Shoalest Sounding**	■ -10' to -20'
— As-built Pipeline/Cable	□ Anchorage Area	★ Beacon, General	■ -20' to -30'
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point	♦ Red Navigation Buoy	■ -30' to -40'
— Project Depth Contour	✳ Wrecks-Submerged	◆ Green Navigation Buoy	■ -40' to -45'
			■ -45' to -48.5'
			■ -48.5' to -55'
			■ -55' and below

Gage Reading: 1.0 MLLW @ LIGHT 21 @ 1030
Sea Conditions: CALM, FLUFF
Vessel Name: BLANCHARD
Survey Type: CONDITION, SB
Sounding Frequency***: LOW

NOTES:
Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.
Vertical Datum: Soundings are shown in feet and indicate depths below Mean Lower Low Water (MLLW, 07-11). Datum Relationships for gage 01575 as of July 2015: 0.0' NAVD83 = 0.17' MLLW = 3.67' MLG
Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.
The location of navigation aids are base on and provided by the U.S. Coast Guard.
2016 Aerial Photography data source: Precision Aerial Reconnaissance, LLC (1998 DOQQ in green)
Reference is N.O.A. Navigation Chart No. 11361.
** Shoalest Sounding per Quarter per Reach.
*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (24 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

**MISSISSIPPI RIVER - B.R. TO GULF
SOUTHWEST PASS - SHEET 8
SW_08_SWP_20200107_CS_FORUM
07 January 2020**

**Sheet Reference Number
8 of 13**

Revision Number:
4.0-201-90702