


DISCLAIMER: The data represented by this map is the result of a collection of data from various sources. The Corps of Engineers is not responsible for the accuracy of the data or the results of any application of the data for other than its intended purpose. The user is responsible for the results of any application of the data for other than its intended purpose. The Corps of Engineers is not responsible for the accuracy of the data or the results of any application of the data for other than its intended purpose. The user is responsible for the results of any application of the data for other than its intended purpose.



Submitted:	Surveyed By:
Recommended:	JIC & RCB
Approved:	Plotted By:
Other: Waterways Maintenance Section	TSS
	Checked By:
	MSK

**MISSISSIPPI RIVER - B.R. TO GULF
SOUTHWEST PASS - SHEET 9
SW_09_SWPX_20241219_CS
19 December 2024**

**Sheet
Reference
Number
9 of 13**

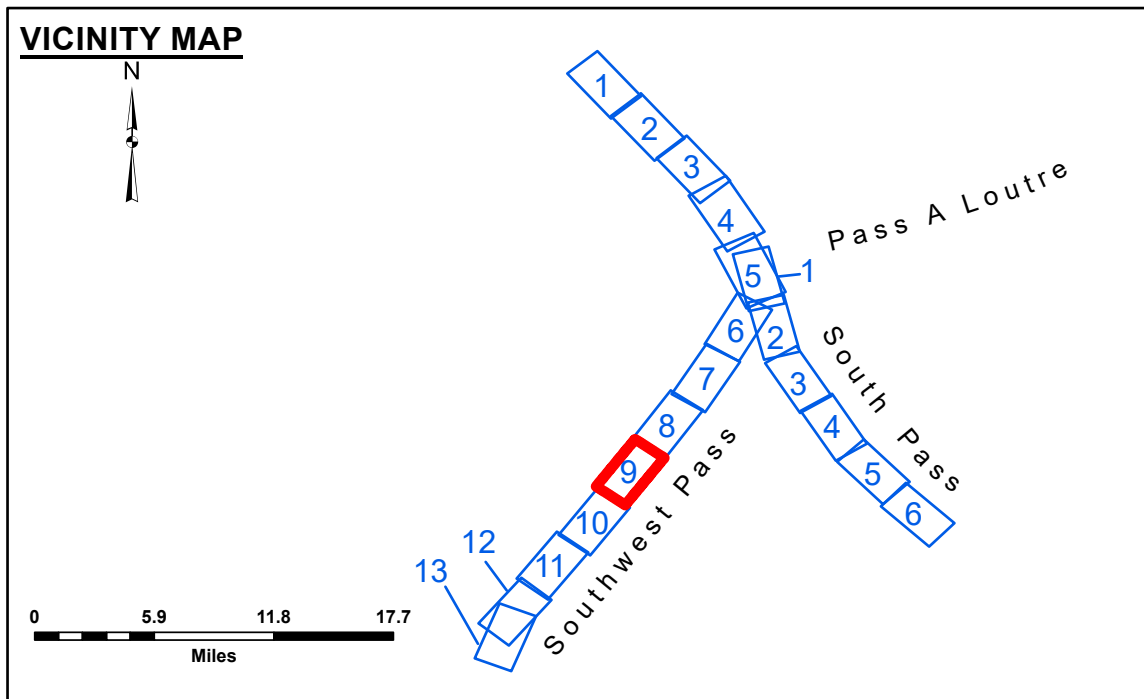

LEGEND		3 Fluff Thickness (feet)*	
--- Federal Navigation Channel	● Cable Area	■ -10' and above	■ -10' to -20'
— Federal Navigation Center Line	□ Placement Area	■ -20' to -30'	■ -30' to -40'
— As-built Pipeline/Cable	□ Anchorage Area	■ -40' to -45'	■ -45' to -50'
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point	■ -50' to -55'	■ -55' and below
— Project Depth Contour	★ Wrecks-Submerged	★ Beacon, General	◆ Red Navigation Buoy
		◆ Green Navigation Buoy	

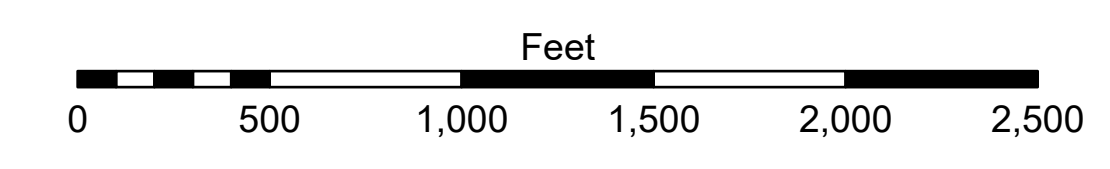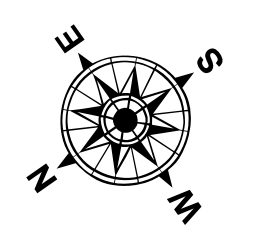

NOTES:
 Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.
 Vertical Datum: 0.2 MLLW @ LIGHT 14 (01625) @ 1120
 Gage Reading: CALM
 Sea Conditions: OB-173 & TOBIN
 Vessel Name: CONDITION, SB
 Survey Type: LOW
 Sounding Frequency***: LOW
 Soundings are shown in feet and indicate depths below Mean Lower Low Water (MLLW, 12-16). Datum Relationships for gage 01625 as of March 2020: 0.0' NAVD83, 2009.55 = 0.40' MLLW = 3.90' MLG
 Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.
 The location of navigation aids are base on and provided by the U.S. Coast Guard.
 2024 Aerial Photography data source: Optimal GEO (1998 DOQQ in green)
 Reference is N.O.A. Navigation Chart No. 11361.
 *** Shoalest Sounding per Quarter per Reach.
 High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (24 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.