


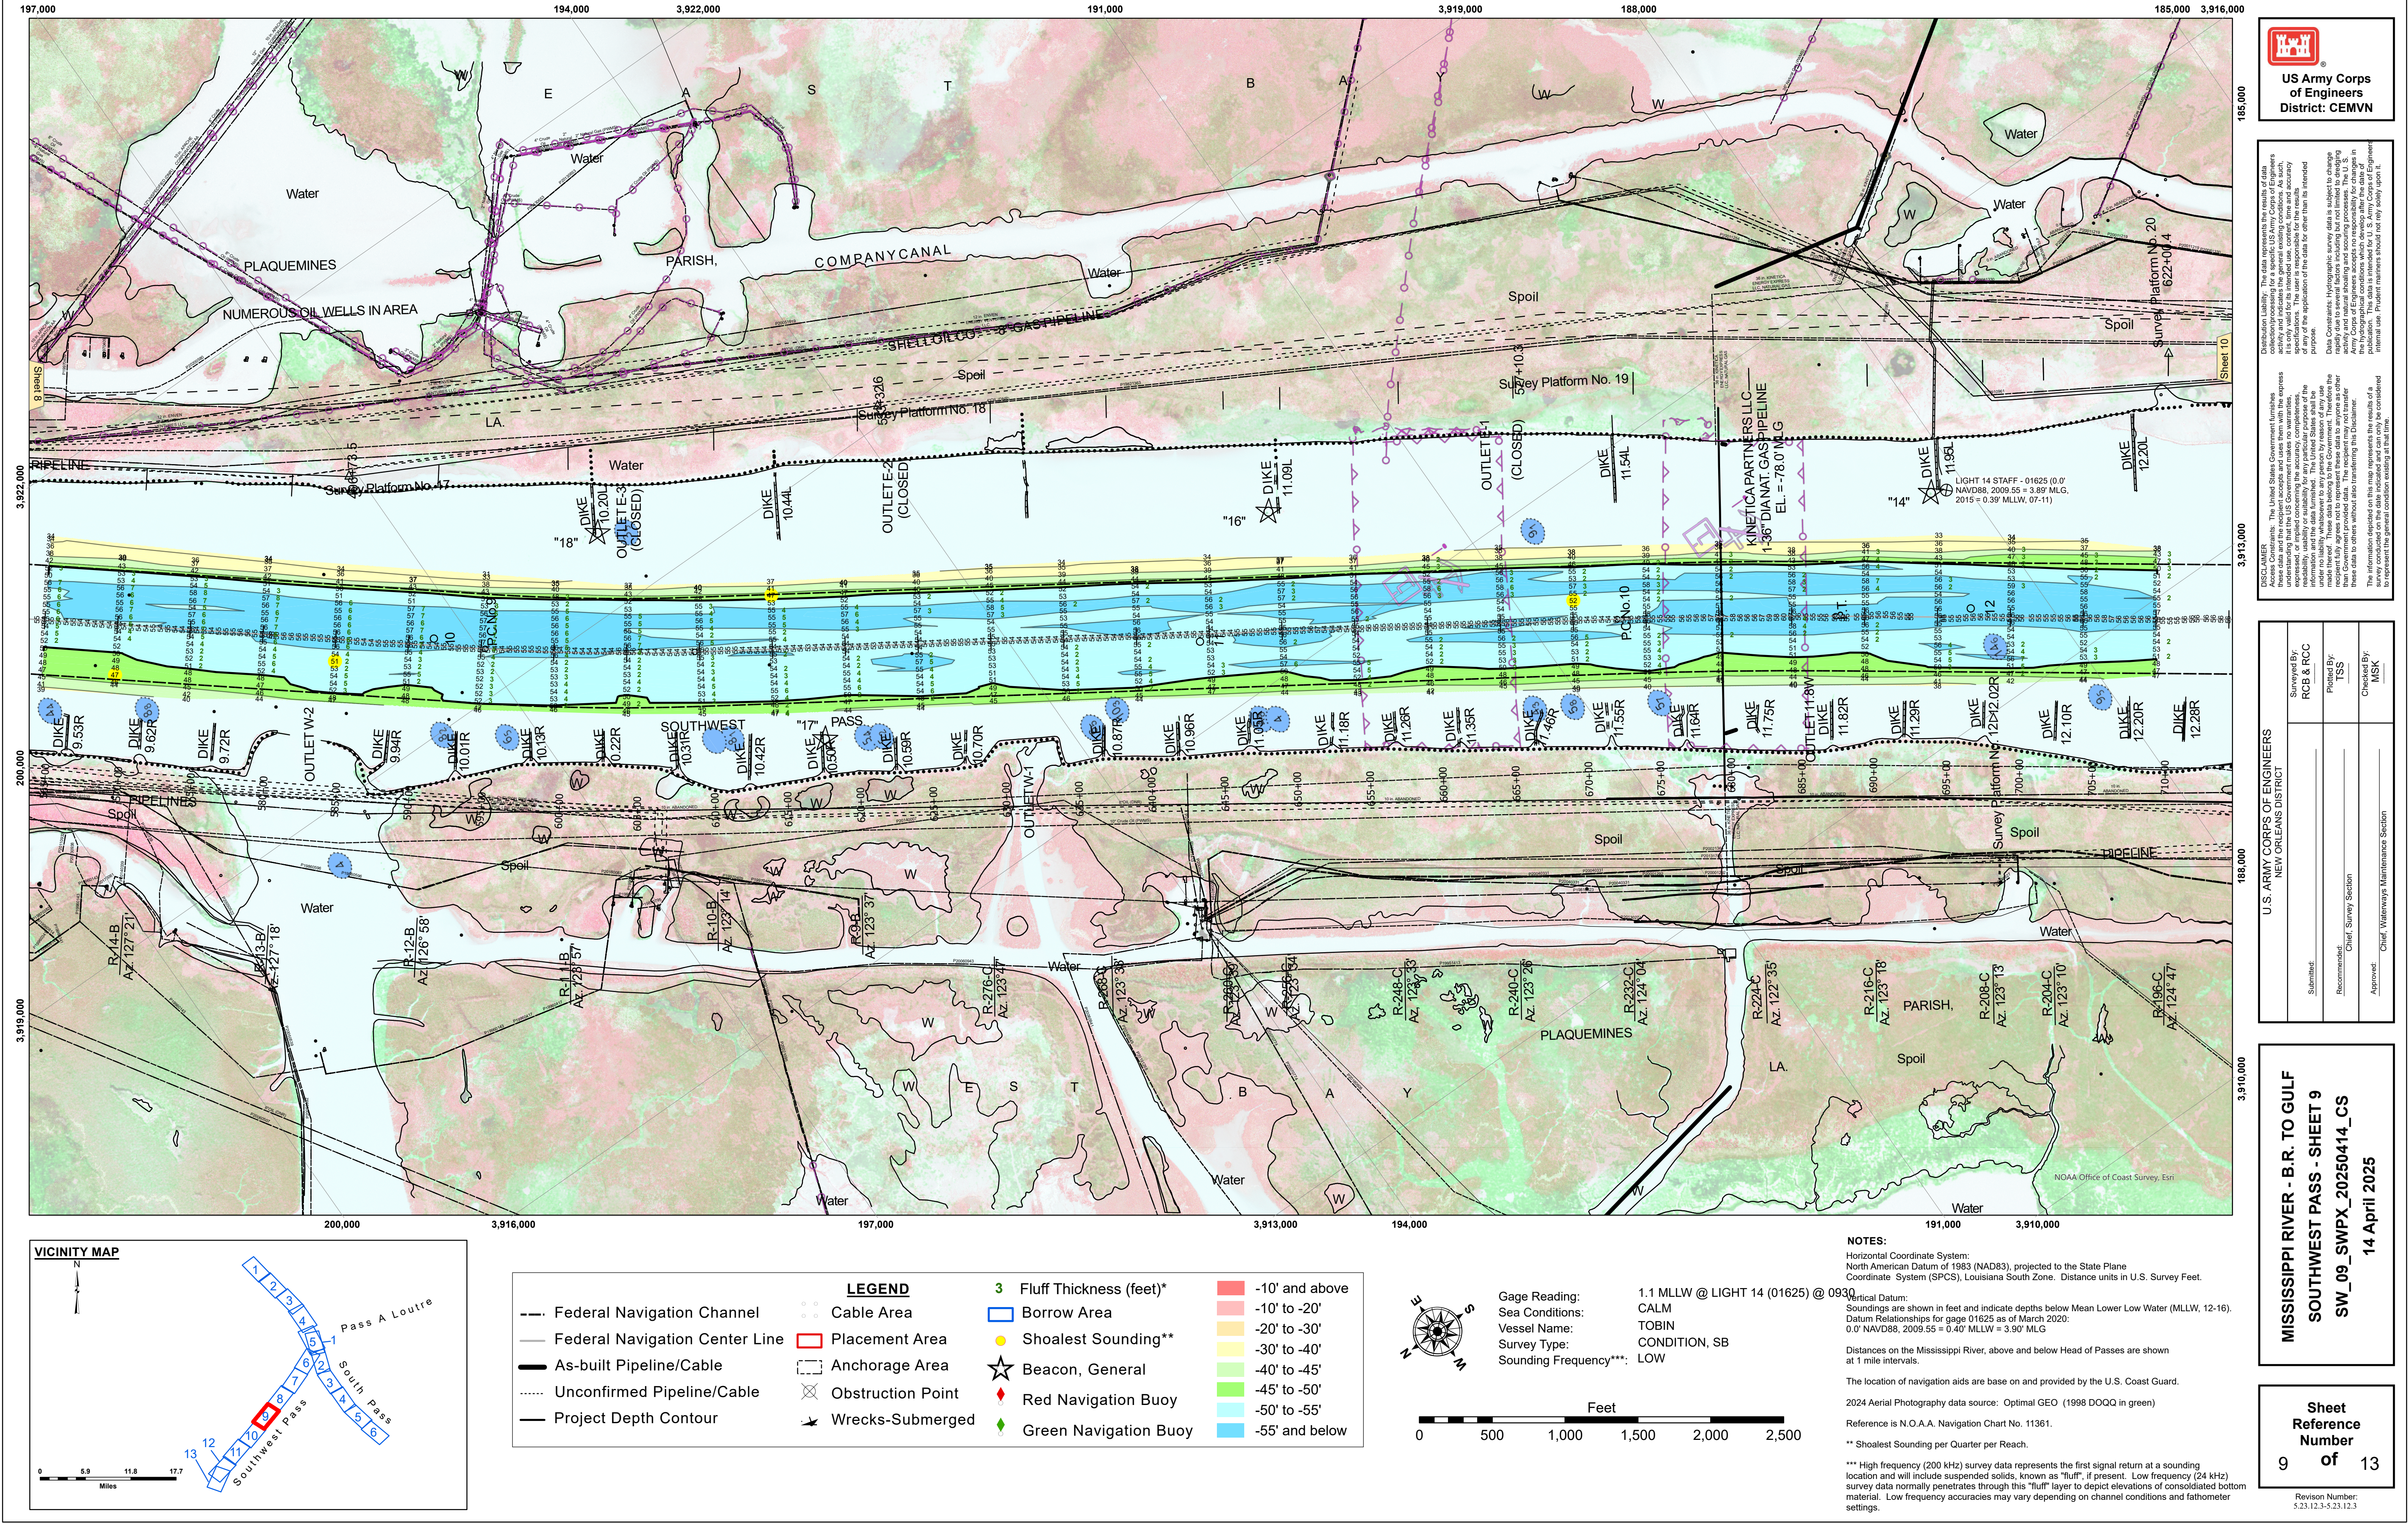


U.S. ARMY CORPS OF ENGINEERS NEW ORLEANS DISTRICT		
Submitted	Surveyed By: RCB & RCC	
Recommended	Plotted By: TSS	
Approved	Chief Survey Section	Checked By: MSK
	Chief Waterways Maintenance Section	

MISSISSIPPI RIVER - B.R. TO GULF
SOUTHWEST PASS - SHEET 9
SW_09_SWPX_20250414_CS
14 April 2025

Sheet
Reference
Number
9 of 13

Revision Number:
5.23.12.3-5.23.12.3

NOTES:
Horizontal Coordinate System:
North American Datum of 1983 (NAD83), projected to the State Plane
Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.
Vertical Datum:
Soundings are shown in feet and indicate depths below Mean Lower Low Water (MLLW, 12-16).
Datum Relationships for gage 01625 as of March 2020:
0.0' NAVD83, 2009.55 = 0.40' MLLW = 3.90' MLG
Distances on the Mississippi River, above and below Head of Passes are shown
at 1 mile intervals.
The location of navigation aids are base on and provided by the U.S. Coast Guard.
2024 Aerial Photography data source: Optimal GEO (1998 DOQQ in green)
Reference is N.O.A.A. Navigation Chart No. 11361.
** Shoalest Sounding per Quarter per Reach.
*** High frequency (200 kHz) survey data represents the first signal return at a sounding
location and will include suspended solids, known as "fluff", if present. Low frequency (24 kHz)
survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom
material. Low frequency accuracies may vary depending on channel conditions and fathometer
settings.

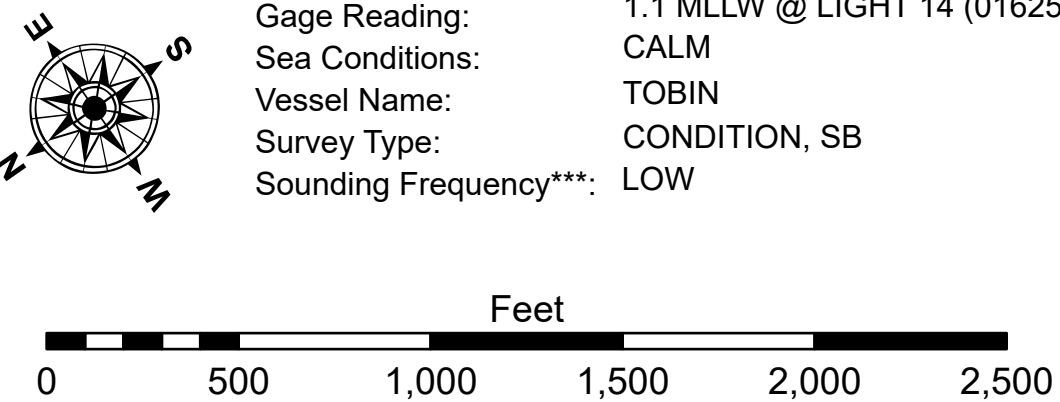

LEGEND

--- Federal Navigation Channel
— Federal Navigation Center Line
— As-built Pipeline/Cable
..... Unconfirmed Pipeline/Cable
— Project Depth Contour

○ Cable Area
□ Placement Area
□ Anchorage Area
⊗ Obstruction Point
✱ Wrecks-Submerged

3 Fluff Thickness (feet)*
□ Borrow Area
● Shoalest Sounding**
☆ Beacon, General
◆ Red Navigation Buoy
◆ Green Navigation Buoy

■ -10' and above
■ -10' to -20'
■ -20' to -30'
■ -30' to -40'
■ -40' to -45'
■ -45' to -50'
■ -50' to -55'
■ -55' and below

