


VICINITY MAP

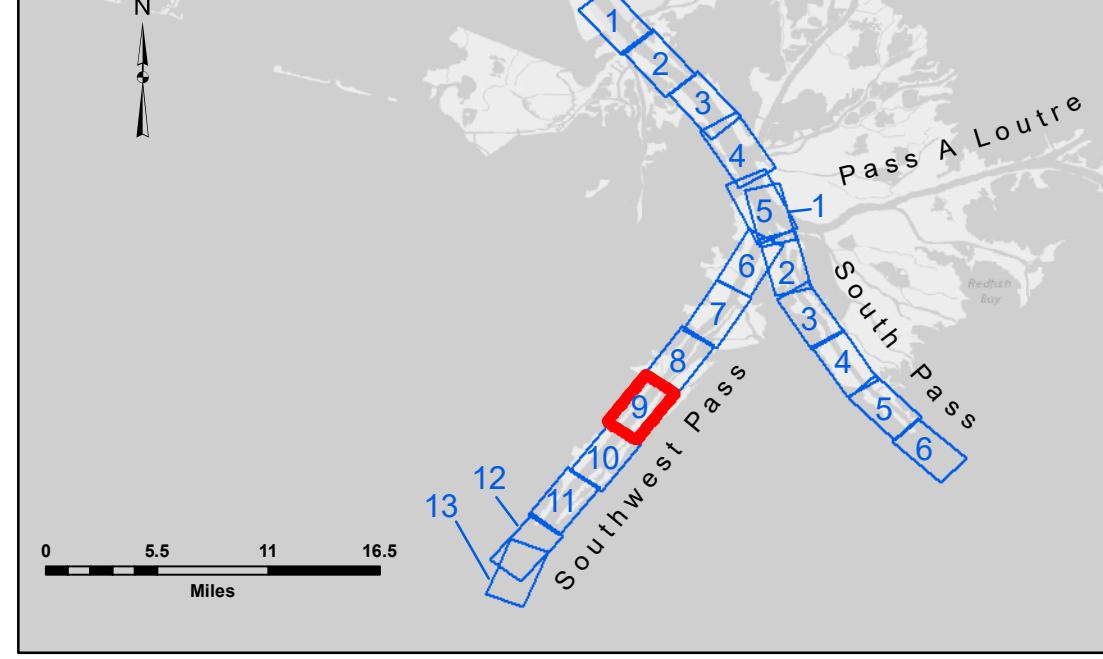


L

- Federal Navigation Channel
 - Federal Navigation Center Line
 - As-built Pipeline/Cable
 - Unconfirmed Pipeline/Cable
 - Project Depth Contour
 - Cable Area
 - Placement Area
 - [] Anchorage Area
 - ⊗ Obstruction Point
 - ↗ Wrecks-Submerged

-  Borrow Area
 -  Shoalest Sounding**
 -  Beacon, General
 -  Red Navigation Buoy
 -  Green Navigation Buoy

-  Gage Reading: 1.3 MLLW @ LIGHT-14 @ 1400
Sea Conditions: CALM, FLUFF
Vessel Name: JOHN BOPP & BEAUVAINS
Survey Type: CONDITION, SB
Sounding Frequency***: LOW



A scale bar representing distance in feet. The bar is divided into segments by tick marks and labeled with values: 0, 500, 1,000, 1,500, 2,000, and 2,500. The labels are positioned below the bar, and the segments between the labels are of equal length.

OTES:

Coordinate System:
Datum of 1983 (NAD83), projected to the State Plane
Cem (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

shown in feet and indicate depths below Mean Lower Low Water (MLLW, 07-11).
hips for gage 01625 as of July 2015:

Mississippi River, above and below Head of Passes are shown

navigation aids are base on and provided by the U.S. Coast Guard.

Photography data source: Precision Aerial Reconnaissance LLC (1998 DOQQ in green)

O A A Navigation Chart No. 11361

ency (200 kHz) survey data represents the first signal return at a sounding include suspended solids, known as "fluff", if present. Low frequency (24 kHz) nally penetrates through this "fluff" layer to depict elevations of consolidated bottom efrequency accuracies may vary depending on channel conditions and fathometer

Sheet Reference Number

Revision Number:
4.0-201907022