


LEGEND	
	Federal Navigation Channel
	Federal Navigation Center Line
	As-built Pipeline/Cable
	Unconfirmed Pipeline/Cable
	Project Depth Contour
	Cable Area
	Placement Area
	Anchorage Area
	Obstruction Point
	Wrecks-Submerged
	Borrow Area
	Shoalest Sounding**
	Beacon, General
	Red Navigation Buoy
	Green Navigation Buoy
	-10' and above
	-10' to -20'
	-20' to -30'
	-30' to -40'
	-40' to -45'
	-45' to -50'
	-50' to -55'
	-55' and below



NOTES:
 Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.
 Vertical Datum: Soundings are shown in feet and indicate depths below Mean Lower Low Water (MLLW, 12-16). Datum Relationships for gage 01625 as of March 2020: 0.0' NAVD83, 2009.55 = 0.40' MLLW = 3.90' MLG
 Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.
 The location of navigation aids are base on and provided by the U.S. Coast Guard.
 2022 Aerial Photography data source: Optimal GEO (1998 DOQQ in green)
 Reference is N.O.A. Navigation Chart No. 11361.
 ** Shoalest Sounding per Quarter per Reach.
 *** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (24 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

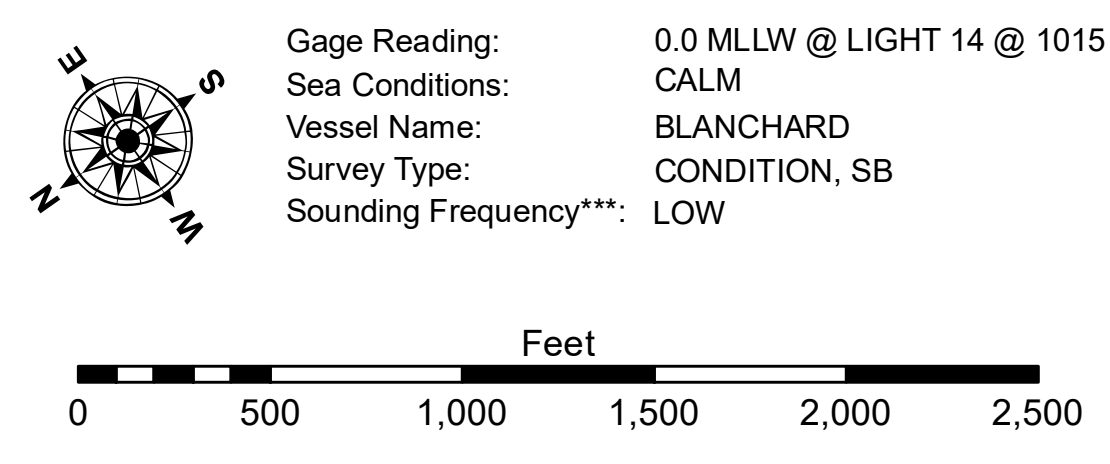

DISTRIBUTION LIABILITY: The data represents the results of data collection/processing for a specific US Army Corps of Engineers project. It is only valid for its intended use, content, time and accuracy specifications. The user is responsible for the results and accuracy of the data. Approximation of the data for other than intended purposes. Data Constants: Hydrographic survey data is subject to change rapidly due to several factors including but not limited to dredging, channel migration, and other factors. The user is responsible for the accuracy of the hydrographic conditions which develop after the date of the original survey. Prudent mariners should not rely solely upon it.

Submitted:	Checked By:
Recommended:	MSK
Approved:	

U.S. ARMY CORPS OF ENGINEERS
 NEW ORLEANS DISTRICT
 Sheet: Waterways Maintenance Section

**MISSISSIPPI RIVER - B.R. TO GULF
 SOUTHWEST PASS - SHEET 10
 SW_10_SWP_20231017_CS
 17 October 2023**

**Sheet Reference Number
 10 of 13**