




Access/Obstruction: The United States Government Lend-Lease...
Distribution Liability: The data represents the results of data collection/processing for a specific US Army Corps of Engineers...
Data: Constant Hydrographic survey data is subject to change...
Disclaimer: The information depicted on this map represents the results of a...
Access/Obstruction: The United States Government Lend-Lease...
Distribution Liability: The data represents the results of data collection/processing for a specific US Army Corps of Engineers...
Data: Constant Hydrographic survey data is subject to change...
Disclaimer: The information depicted on this map represents the results of a...

U.S. ARMY CORPS OF ENGINEERS NEW ORLEANS DISTRICT		
Submitted:	Surveyed By: SPSR	Plotted By: BD
Recommended: Chief Survey Section	Checked By: AO/JH	Approved: Chief Waterways Maintenance Section

**BAYOU TECHE
WAX LAKE TO CHARENTON
TC_21_W2C_20230104_CS
04 January 2023**

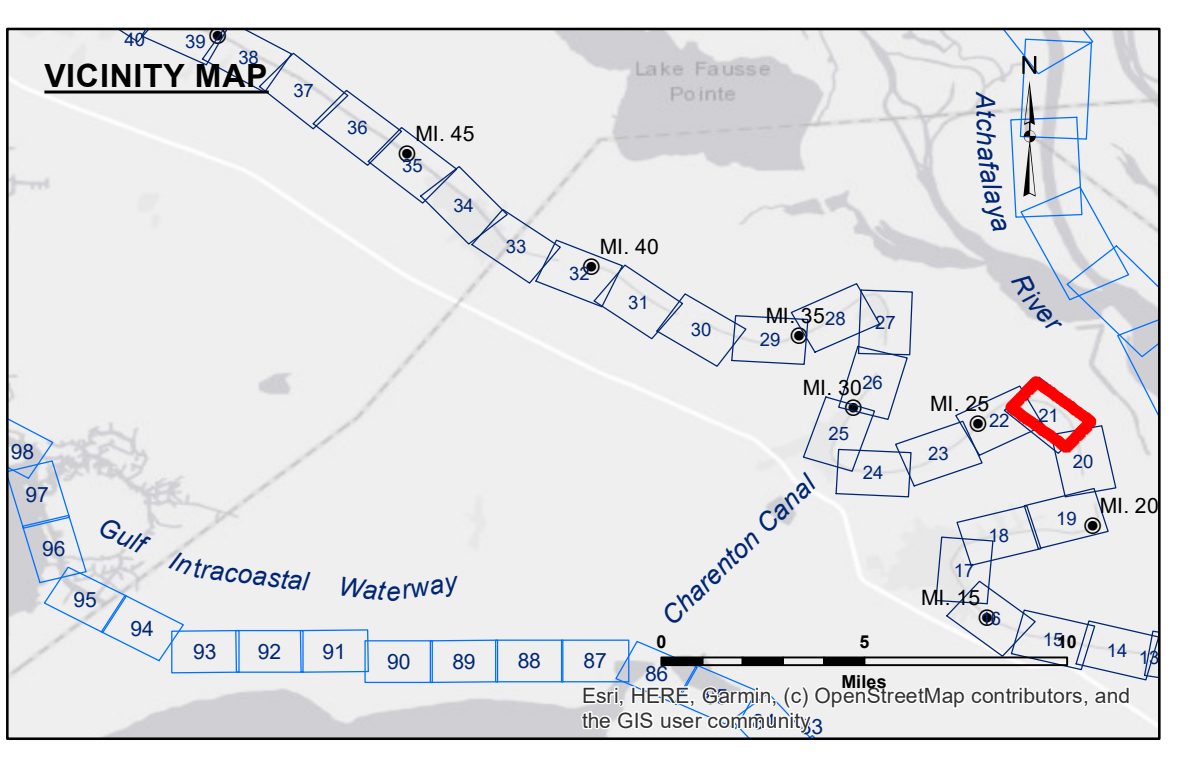

LEGEND

--- Federal Navigation Channel	○ Cable Area	□ Borrow Area	■ -6' and above
— Federal Navigation Center Line	□ Placement Area	● Shoalest Sounding**	■ -6' to -8'
— As-built Pipeline/Cable	□ Anchorage Area	★ Beacon, General	■ -8' to -15'
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point	◆ Red Navigation Buoy	■ -15' to -20'
— Project Depth Contour	✈ Wrecks-Submerged	◆ Green Navigation Buoy	■ -20' to -25'
			■ -25' to -30'
			■ -30' and below

NOTES:

Horizontal Coordinate System:
North American Datum of 1983 (NAD83), projected to the State Plane
Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum:
Soundings are shown in feet and indicate depths below Mean Low Gulf Datum (MLG).

The location of navigation aids are base on and provided by the U.S. Coast Guard.

Reference is N.O.A.A. Navigation Chart No. 11350.

** Shoalest Sounding per Quarter per Reach.

*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

Gage Reading: VRS RTK NTRIP: 3.67 MLG AVG.
Sea Conditions: CALM
Vessel Name: OB-169
Survey Type: CONDITION
Sounding Frequency***: HIGH

Feet
0 500 1,000