




Access/Consent: The United States Government Lend-Lease... these data and the recipient accepts and uses them with the express...
Distribution Liability: The data represents the results of data... collection/processing for a specific US Army Corps of Engineers...
Data: Constant Hydrographic survey data is subject to change...
Disclaimer: The information depicted on this map represents the results of a...
Internal Use: The information depicted on this map represents the results of a...
Internal Use: The information depicted on this map represents the results of a...
Internal Use: The information depicted on this map represents the results of a...


U.S. ARMY CORPS OF ENGINEERS NEW ORLEANS DISTRICT		
Submitted:	Surveyed By: SPSR	Plotted By: AO
Recommended: Chief Survey Section	Checked By: AO	Checked By: AO
Approved:	Chief Waterways Maintenance Section	

**BAYOU TECHE
WAX LAKE TO CHARENTON
TC_25_C2I_20230117_CS
17 January 2023**

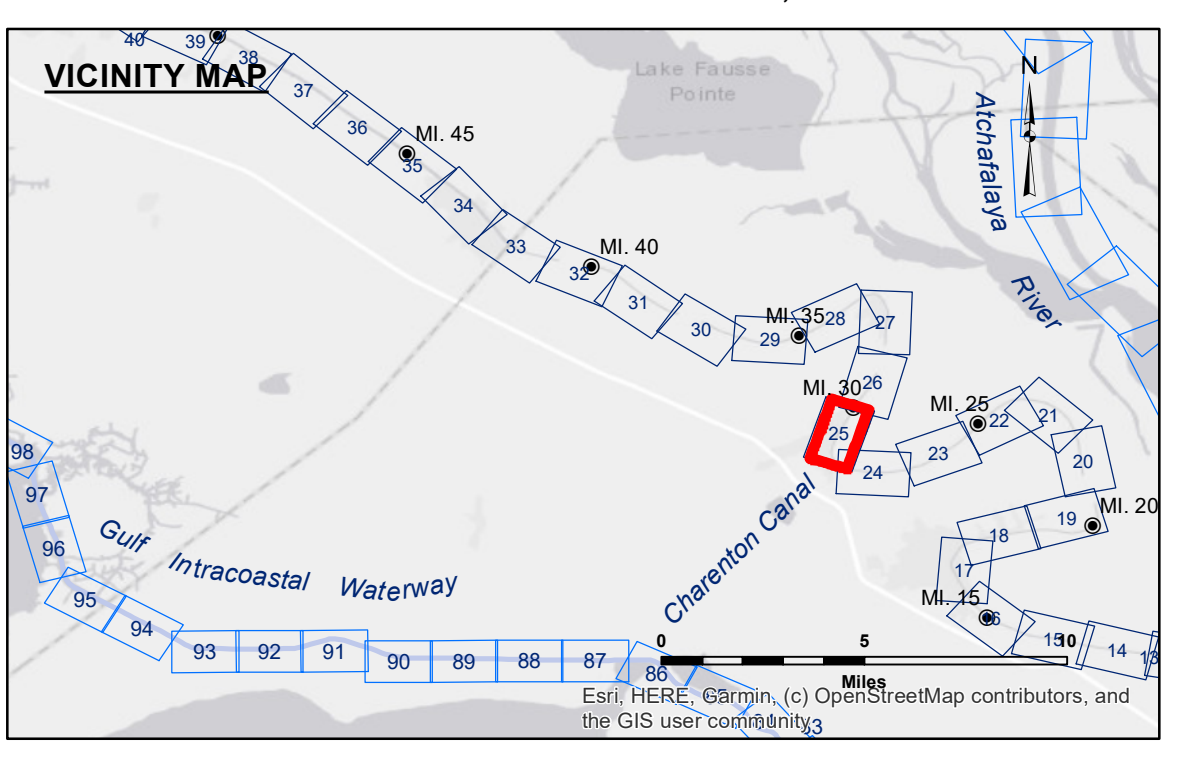

LEGEND

--- Federal Navigation Channel	○ Cable Area	□ Borrow Area	■ -6' and above
— Federal Navigation Center Line	□ Placement Area	● Shoalest Sounding**	■ -6' to -8'
— As-built Pipeline/Cable	□ Anchorage Area	★ Beacon, General	■ -8' to -15'
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point	◆ Red Navigation Buoy	■ -15' to -20'
— Project Depth Contour	✈ Wrecks-Submerged	◆ Green Navigation Buoy	■ -20' to -25'
			■ -25' to -30'
			■ -30' and below

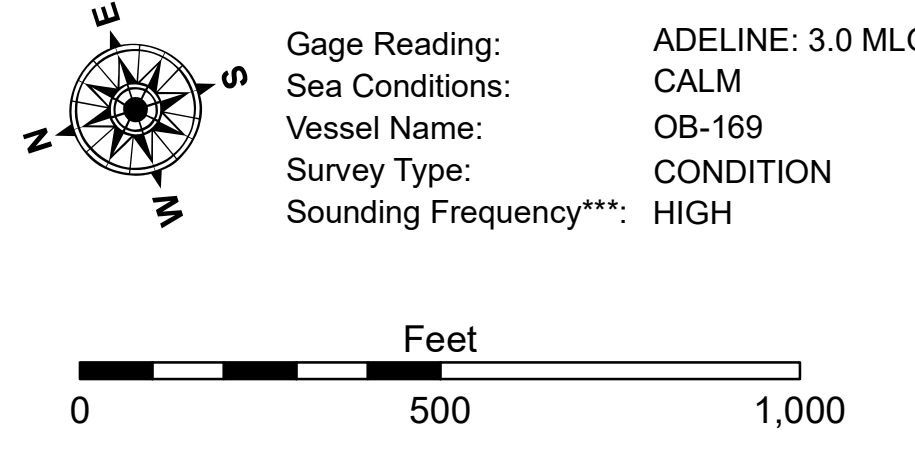

NOTES:
 Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.
 Vertical Datum: Soundings are shown in feet and indicate depths below Mean Low Gulf Datum (MLG).
 The location of navigation aids are base on and provided by the U.S. Coast Guard.
 2019 Aerial Photography data source: NAIP. 1998 DOQQ imagery shown in green from USGS.
 Reference is N.O.A.A. Navigation Chart No. 11350.
 ** Shoalest Sounding per Quarter per Reach.
 *** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

**Sheet
Reference
Number
25 of 74**

Revision Number:
4.2-20200420