




Access Conditions: The United States Government Lighthouses and other aids to navigation are shown on this chart for information only. The user is responsible for the accuracy, completeness, and timeliness of the data. The user is responsible for the accuracy, completeness, and timeliness of the data. The user is responsible for the accuracy, completeness, and timeliness of the data.

Distribution Liability: The data represents the results of data collection for a specific US Army Corps of Engineers project. It is only valid for its intended use, content, time and accuracy specifications. The user is responsible for the accuracy, completeness, and timeliness of the data. The user is responsible for the accuracy, completeness, and timeliness of the data.

Data: Constants Hydrographic survey data is subject to change rapidly due to several factors including, but not limited to, changing hydrographic conditions which develop after the date of the survey. The user is responsible for the accuracy, completeness, and timeliness of the data. The user is responsible for the accuracy, completeness, and timeliness of the data.

Submitted:	Surveyed By: PM,LT
Recommended: Chief, Survey Section	Plotted By: JHI
Approved: Chief, Waterways Maintenance Section	Checked By: AC

**BAYOU TECHE
KEYSTONE TO ARNAUDVILLE
TC_62_KZA_20241106_CS_1X1
06 November 2024**

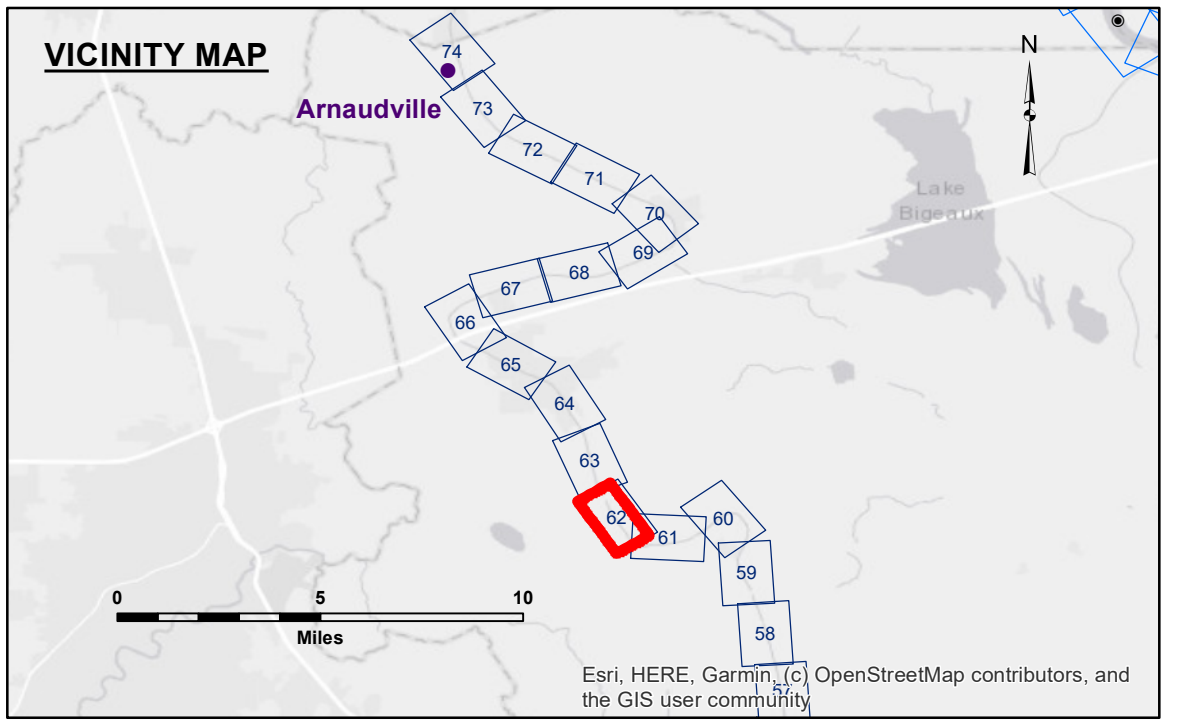

LEGEND			
--- Federal Navigation Channel	○ Cable Area	□ Borrow Area	■ +5' and above
— Federal Navigation Center Line	□ Placement Area	● Shoalest Sounding**	■ +5' to -6'
— As-built Pipeline/Cable	□ Anchorage Area	★ Beacon, General	■ -6' to -8'
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point	◆ Red Navigation Buoy	■ -8' to -15'
— Project Depth Contour	⚓ Wrecks-Submerged	◆ Green Navigation Buoy	■ -15' to -20'
			■ -20' to -25'
			■ -25' to -30'
			■ -30' and below

NOTES:

Horizontal Coordinate System:
North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum:
Soundings are shown in feet and indicate depths below Mean Low Gulf Datum (MLG).

The location of navigation aids are based on and provided by the U.S. Coast Guard.

2015 Aerial Photography data source: NAIP. 1998 DOQQ imagery shown in green from USGS.

Reference is N.O.A. Navigation Chart No. 11350.

** Shoalest Sounding per Quarter per Reach.

*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

Gage Reading: VRN RTK: 11.3 MLG
Sea Conditions: CALM
Vessel Name: OB169
Survey Type: CS
Sounding Frequency***: 400KHZ