



LEGEND

--- Federal Navigation Channel	--- Cable Area	□ Borrow Area	■ -12' and above
— Federal Navigation Center Line	□ Placement Area	● Shoalest Sounding**	■ -12' to -15'
— As-built Pipeline/Cable	□ Anchorage Area	★ Beacon, General	■ -15' to -18'
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point	◆ Red Navigation Buoy	■ -18' to -20'
— Project Depth Contour	⚓ Wrecks-Submerged	◆ Green Navigation Buoy	■ -20' and below
			■ Fluff Thickness*

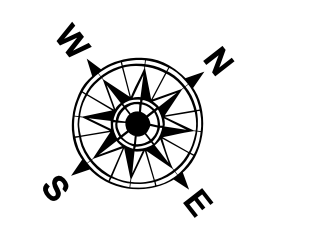

Gage Reading: EUGINE ISLAND: 2.68 AVG.
 Sea Conditions: 1-3 FT
 Vessel Name: MV VALENTOUR
 Survey Type: CONDITION
 Sounding Frequency**: LOW

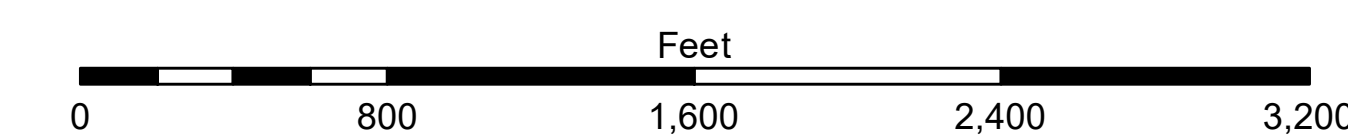

NOTES:
 Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.
 Vertical Datum: Soundings are shown in feet and indicate depths below Mean Low Gulf Datum (MLG). Datum Relationships for the gage 88600 as of August 2013: 0.07 NAVD83 = 0.01 MLLW = 1.5' MLG
 Distances on the Atchafalaya River are shown at 1 mile intervals.
 The location of navigation aids are based on and provided by the U.S. Coast Guard.
 2013 Aerial Photography data source: GEOCLIP, Atlantic Group, LLC. (1998 DOQQ imagery in green).
 Reference is N.O.A.A. Navigation Chart No. 11354.
 * Difference between high and low frequency elevations where greater than 1.0'.
 ** Shoalest Sounding per Quarter per Reach.
 *** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and bathymetry settings.

DISCLAIMER: The United States Government neither warrants nor makes any representation as to the accuracy, reliability, or availability of the data for other than its intended purpose. The user of the data for other than its intended purpose is solely responsible for the accuracy, reliability, or availability of the data for other than its intended purpose. Data obtained from hydrographic survey data is subject to change without notice and is not intended for use in any other application. The U.S. Army Corps of Engineers does not warrant the accuracy, reliability, or availability of the data for other than its intended purpose. The user of the data for other than its intended purpose is solely responsible for the accuracy, reliability, or availability of the data for other than its intended purpose.

Submitted By:	RYLAND/DAMS
Prepared By:	BD
Checked By:	AO

**ATCHAFALAYA RIVER
 BAR CHANNEL
 AR_02_BAR_20190625_CS
 25 June 2019**

**Sheet Reference Number
 2 of 16**