

**US Army Corps of Engineers District: CEMVN**

Distribution Liability: The data represents the results of data collection and processing for a specific US Army Corps of Engineers project. The user is responsible for the results of the data and its use. The user is responsible for the results of the data and its use. The user is responsible for the results of the data and its use.


Access Constraints: The United States Government furnishes these data and the recipient accepts and uses them with the express understanding that they are provided for informational purposes only. The user is responsible for the accuracy, completeness, reliability, usability or suitability for any particular purpose of the information. The user is responsible for the accuracy, completeness, reliability, usability or suitability for any particular purpose of the information. The user is responsible for the accuracy, completeness, reliability, usability or suitability for any particular purpose of the information.

Surveyed By:	JDH/JA
Plotted By:	BD
Checked By:	AC

U.S. ARMY CORPS OF ENGINEERS  
NEW ORLEANS DISTRICT


**CALCASIEU SHIP CHANNEL  
LOWER SHEET 18  
CR\_18\_LWR\_20200304\_CS  
04 March 2020**

**Sheet Reference Number  
18 of 53**

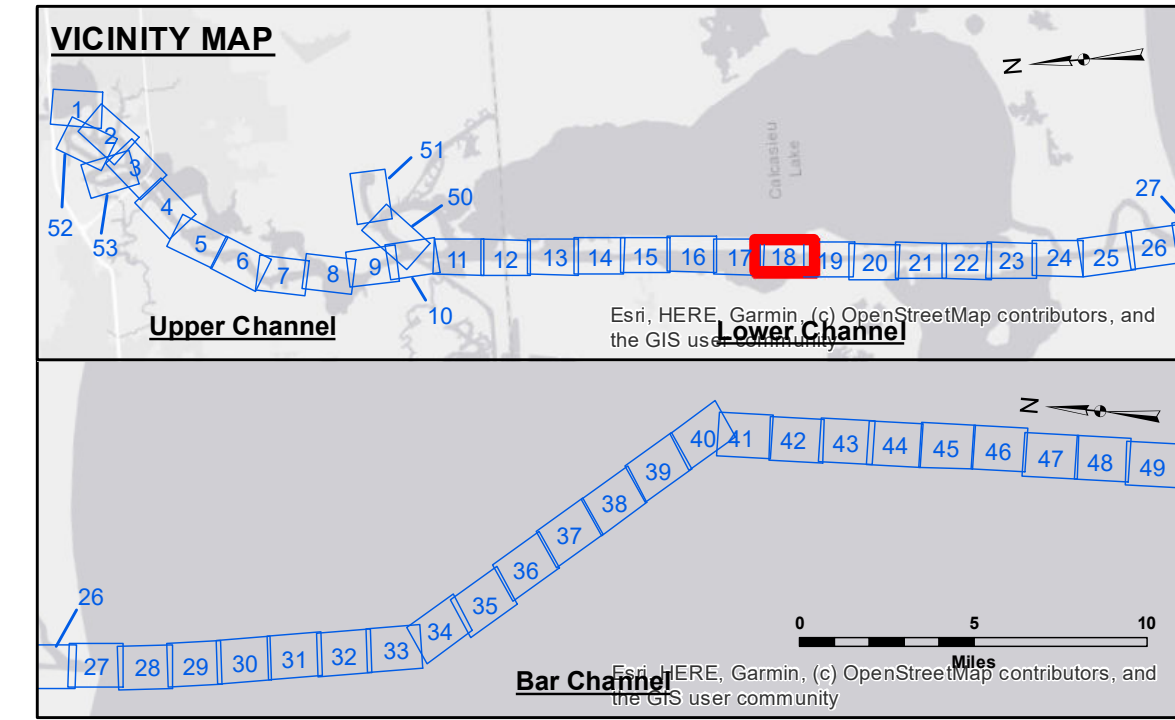

**LEGEND**

--- Federal Navigation Channel	••• Cable Area	3 Fluff Thickness (feet)*	-16' and above
— Federal Navigation Center Line	□ Placement Area	● Shoalest Sounding**	-16' to -21'
— As-built Pipeline/Cable	⊗ Anchorage Area	★ Beacon, General	-21' to -26'
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point	◆ Red Navigation Buoy	-26' to -33'
— Project Depth Contour	✈ Wrecks-Submerged	◆ Green Navigation Buoy	-33' to -39'
			-39' to -41'
			-41' to -43'
			-43' and below

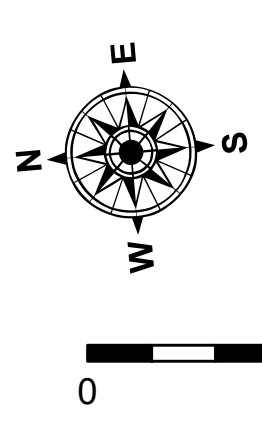

Gage Reading: DM 72: 1.87 MLLW AVG.  
Sea Conditions: CALM  
Vessel Name: M/V VALETOUR  
Survey Type: CONDITION  
Sounding Frequency\*\*\*: LOW

Feet  
0 400 800 1,200 1,600

**NOTES:**

Horizontal Coordinate System:  
North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum:  
Soundings are shown in feet and indicate depths below Mean Lower Low Water Datum (MLLW).  
Datum Relationships for gage 73615 as of December 2013:  
0.0' NAVD83 (2009.55) = 1.1' MLLW = 2.1' MLG or 0.0' MLLW = 1.0' MLG

Distances on the Calcasieu River are shown at 1 mile intervals.

The location of navigation aids are base on and provided by the U.S. Coast Guard and USACE survey crews.

2015 Aerial Photography data source: NAIP  
Reference is N.O.A. Navigation Chart No. 11339.  
\* Difference between high and low frequency elevations where greater than 1.0'.  
\*\* Shoalest Sounding per Quarter per Reach.  
\*\*\* High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.