



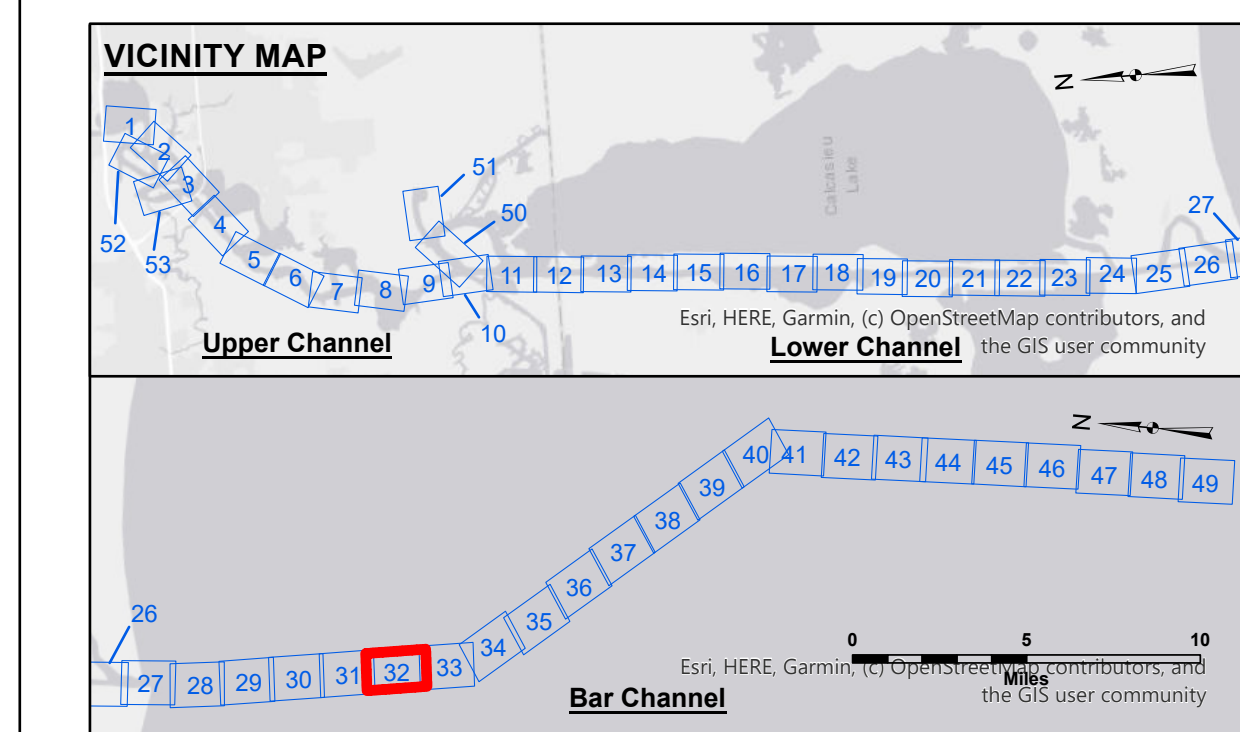

LEGEND							
 Federal Navigation Channel	 Cable Area	 Fluff Thickness (feet)*		-16' and above			
 Federal Navigation Center Line	 Placement Area	 Shoalest Sounding**		-16' to -21'			
 As-built Pipeline/Cable	 Anchorage Area	 Beacon, General		-21' to -26'			
 Unconfirmed Pipeline/Cable	 Obstruction Point	 Red Navigation Buoy		-26' to -33'			
 Project Depth Contour	 Wrecks-Submerged	 Green Navigation Buoy		-33' to -39'			
				-39' to -41'			
				-41' to -43'			
				-43' and below			

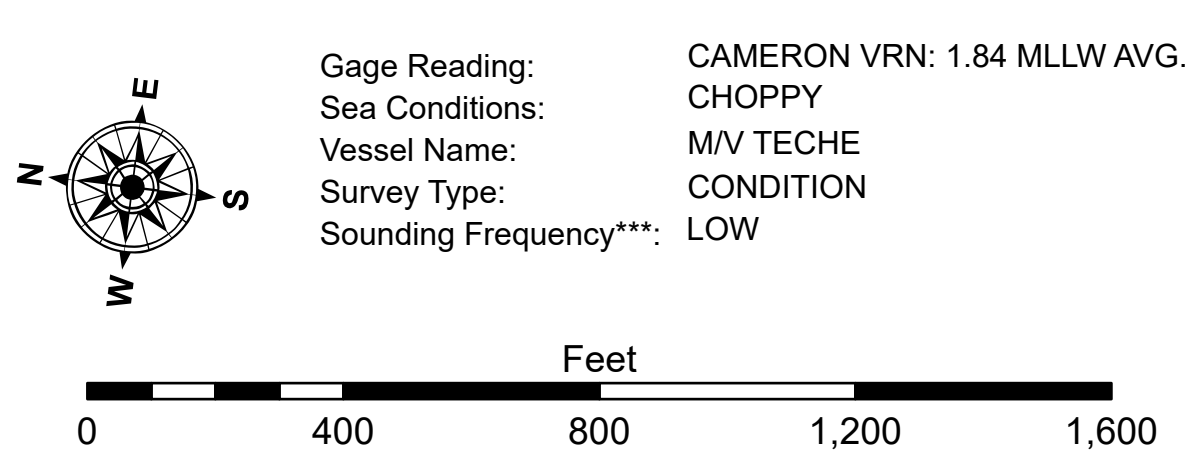

NOTES:
Horizontal Coordinate System:
North American Datum of 1983 (NAD83), projected to the State Plane
Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum:
Soundings are shown in feet and indicate depths below Mean Lower Low Water Datum (MLLW).
Datum Relationships for date 73650 of December 2013:
0.0' NAD83 (2009.55) = 1.3' MLLW = 2.3' M.L.G. or 0.0' MLLW = 1.0' M.L.G

Distances on the Calcasieu River are shown at 1 mile intervals.

The location of navigation aids are base on and provided by the U.S. Coast Guard and USACE survey crews.

Aerial Photography data source: BUMP 2026 (DOQG 1998 in transparent green)

Reference is N.O.A.A. Navigation Chart No. 11339.

* Difference between high and low frequency elevations where greater than 1.0'.

** Shoalest Sounding per Quarter per Reach.

*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

Sheet
Reference
Number
32 of 53