


DISCLAIMER
 The United States Government furnishes these data and the recipient accepts and uses them with the express understanding that the data are not to be used for any purpose other than that for which they were originally collected, and that the user is responsible for the results of any use of the data for other than its intended purpose.
 Data Constituting Hydrographic Survey Data is subject to change rapidly due to several factors including but not limited to dredging operations, natural accretion and erosion, and other changes in the hydrographical conditions which develop after the date of the survey. The information depicted on this map represents the results of a survey conducted on the date shown and is not to be considered to represent the general condition existing at that time.
 Distribution Liability: The data represents the results of data collection/processing for a specific US Army Corps of Engineers project. It is only valid for its intended use, content, time and accuracy specifications. The user is responsible for the results of any use of the data for other than its intended purpose.
 The information depicted on this map represents the results of a survey conducted on the date shown and is not to be considered to represent the general condition existing at that time.

| | |
|--|-----------------------|
| U.S. ARMY CORPS OF ENGINEERS NEW ORLEANS DISTRICT | |
| Submitted: | Surveyed By: SP-JS |
| Recommended: Chief Survey Section | Plotted By: JH |
| Approved: | Checked By: JH |

CALCASIEU SHIP CHANNEL
BAR SHEET 44
CR_44_BAR_20250128_CS
28 January 2025

Sheet Reference Number
44 of 53

Revision Number:
4.2-20240420

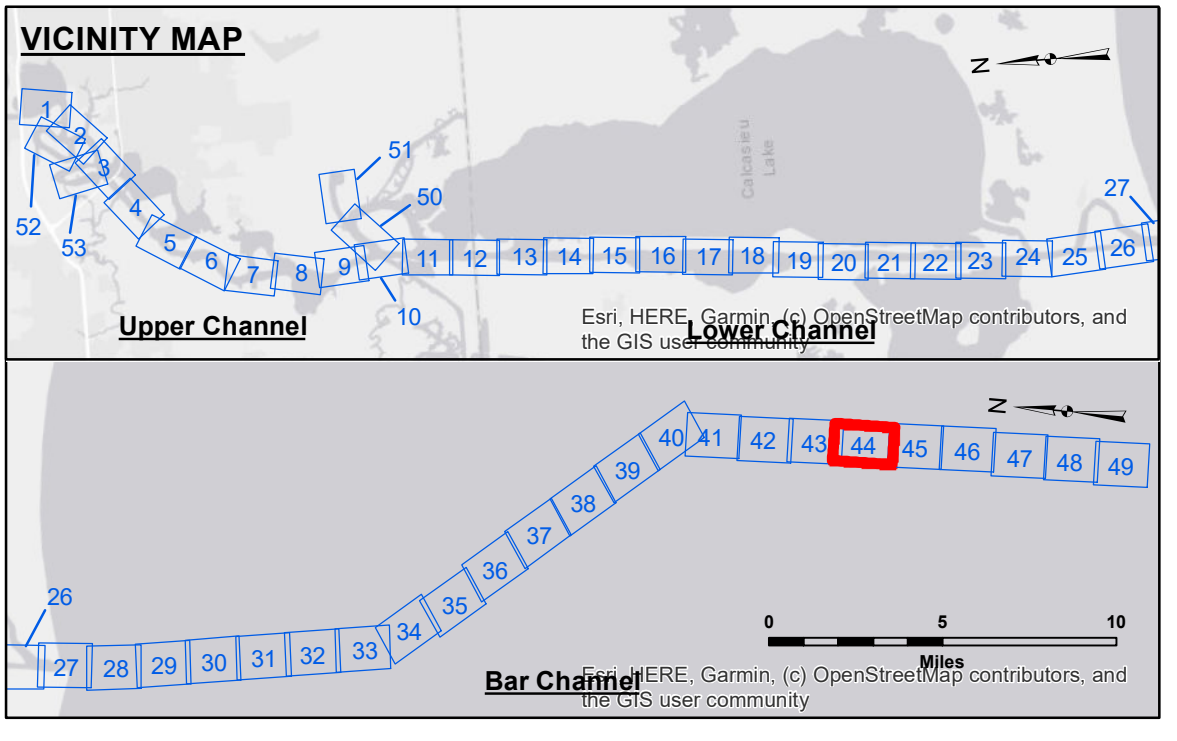

LEGEND

| | | | |
|----------------------------------|---------------------|---------------------------|------------------|
| --- Federal Navigation Channel | ○ Cable Area | 3 Fluff Thickness (feet)* | ■ -16' and above |
| — Federal Navigation Center Line | □ Placement Area | ● Shoalest Sounding** | ■ -16' to -21' |
| — As-built Pipeline/Cable | ⊗ Anchorage Area | ★ Beacon, General | ■ -21' to -26' |
| Unconfirmed Pipeline/Cable | ⊗ Obstruction Point | ◆ Red Navigation Buoy | ■ -26' to -33' |
| — Project Depth Contour | ⊗ Wrecks-Submerged | ◆ Green Navigation Buoy | ■ -33' to -39' |
| | | | ■ -39' to -41' |
| | | | ■ -41' to -43' |
| | | | ■ -43' and below |

NOTES:

Coordinate System:
 North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum:
 Soundings are shown in feet and indicate depths below Mean Lower Low Water Datum (MLLW). Datum Relationships for gage 73650 as of December 2013:
 0.0' NAVD88 (2009.55) = 1.3' MLLW = 2.3' MLG or 0.0' MLLW = 1.0' MLG

Distances on the Calcasieu River are shown at 1 mile intervals.

The location of navigation aids are base on and provided by the U.S. Coast Guard and USACE survey crews.

2015 Aerial Photography data source: NAIP
 Reference is N.O.A.A. Navigation Chart No. 11339.

* Difference between high and low frequency elevations where greater than 1.0'.
 ** Shoalest Sounding per Quarter per Reach.

*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

Gage Reading: CAMERON: 0.1 MLLW AVG
 Sea Conditions: CHOP
 Vessel Name: MV TECHE
 Survey Type: CONDITION
 Sounding Frequency***: LOW