
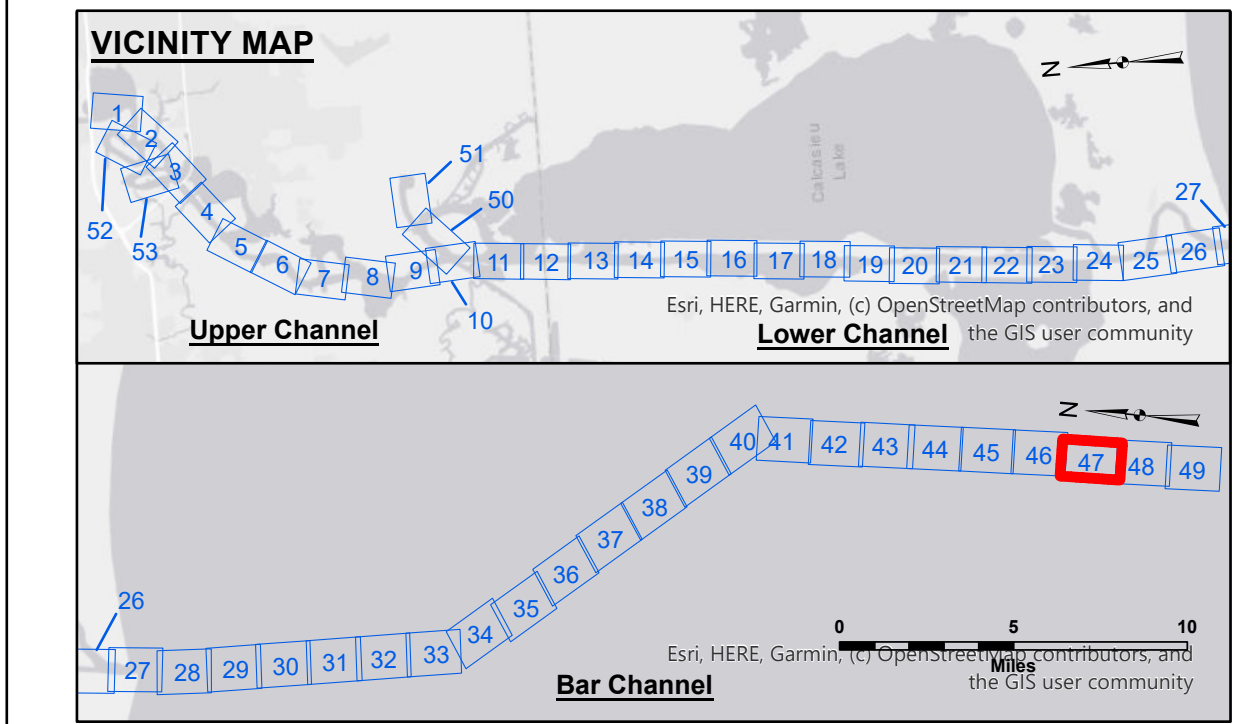


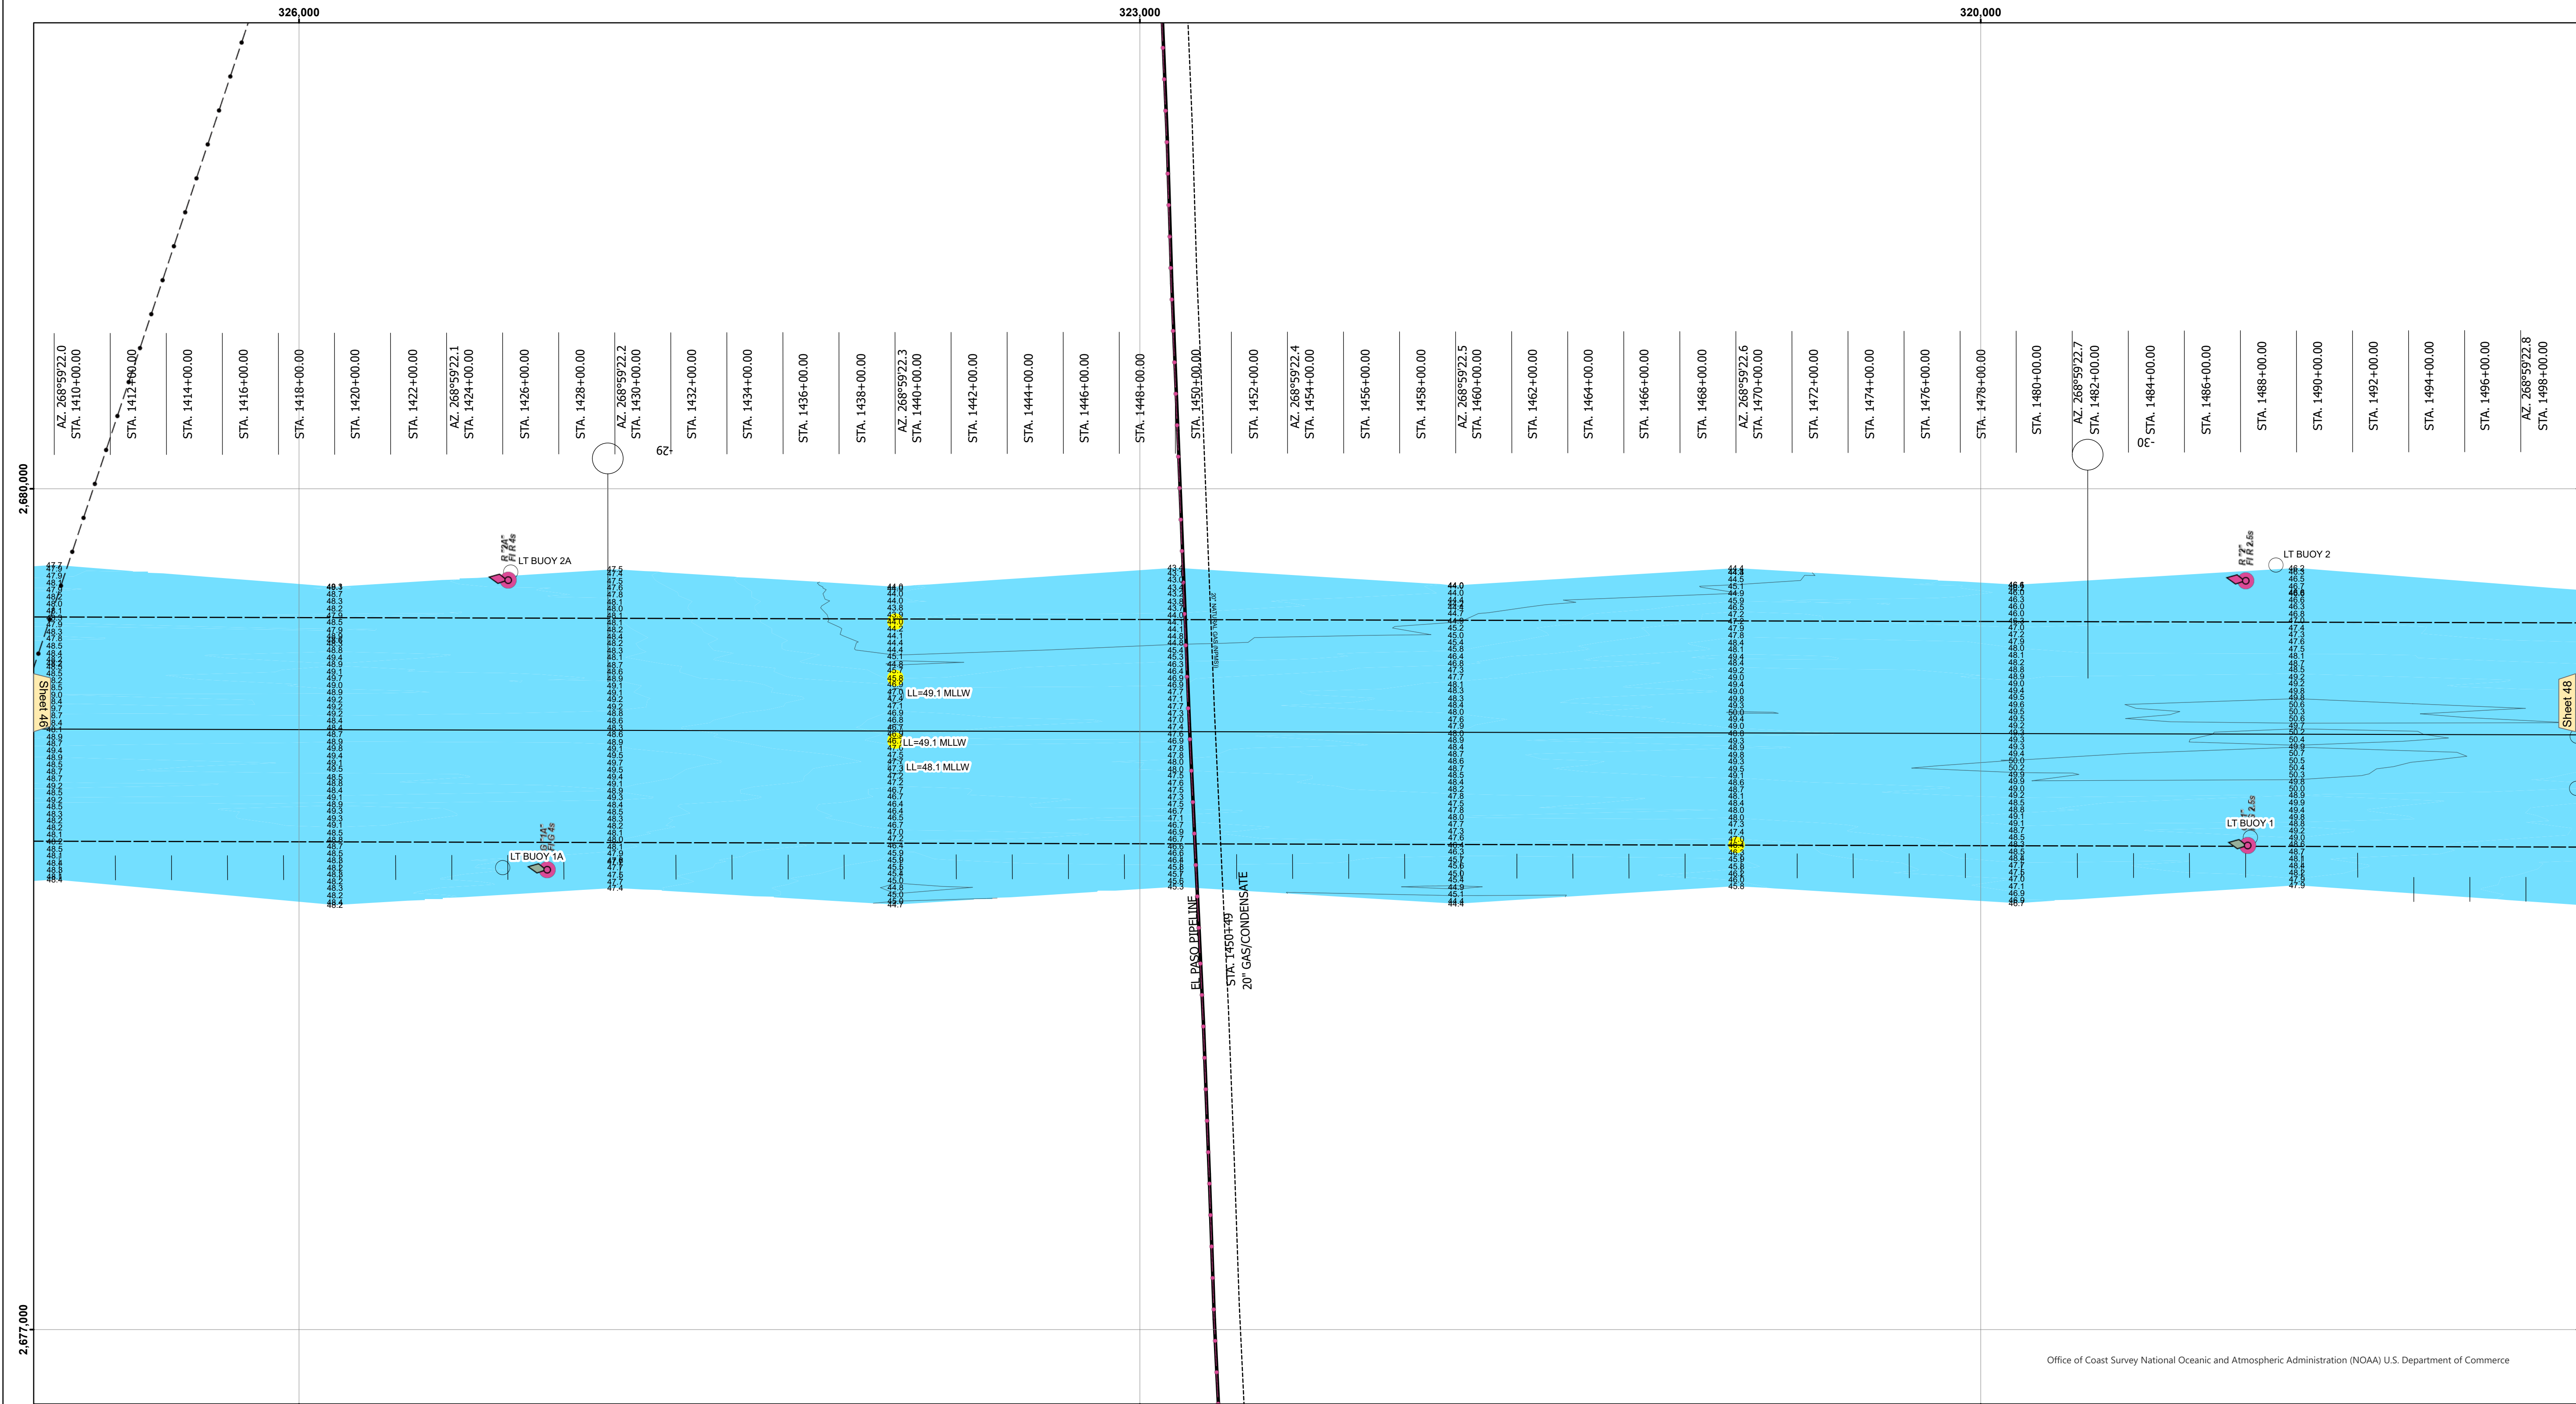

LEGEND

--- Federal Navigation Channel

— Federal Navigation Center Line

— As-built Pipeline/Cable

..... Unconfirmed Pipeline/Cable

— Project Depth Contour

○ Cable Area

□ Placement Area

□ Anchorage Area

⊗ Obstruction Point

✈ Wrecks-Submerged

3 Fluff Thickness (feet)*

● Shoalest Sounding**

★ Beacon, General

◆ Red Navigation Buoy

◇ Green Navigation Buoy

■ -16' and above

■ -16' to -21'

■ -21' to -26'

■ -26' to -33'

■ -33' to -39'

■ -39' to -41'

■ -41' to -43'

■ -43' and below

Gage Reading:
Sea Conditions:
Vessel Name:
Survey Type:
Sounding Frequency***: LOW

CAMERON: 1.92 MLLW AVG.
CHOPPY
M/V TECHE
CONDITION
LOW

Reference is N.O.A.A. Navigation Chart No. 11339.

Feet

0 400 800 1,200 1,600

NOTES:

Coordinate System:
North American Datum of 1983 (NAD83), projected to the State Plane
Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum:
Soundings are shown in feet and indicate depths below Mean Lower Low Water Datum (MLLW).
Datum Relationships for gage 73650 as of December 2013:
0.0' NAVD88 (2009.55) = 1.3' MLLW = 2.3' MLG or 0.0' MLLW = 1.0' MLG

Distances on the Calcasieu River are shown at 1 mile intervals.

The location of navigation aids are base on and provided by the U.S. Coast Guard and USACE survey crews.

Aerial Photography data source: BUMP 2026 (DOQQ 1998 in transparent green)

Reference is N.O.A.A. Navigation Chart No. 11339.

* Difference between high and low frequency elevations where greater than 1.0'.

** Shoalest Sounding per Quarter per Reach.

*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

U.S. ARMY CORPS OF ENGINEERS NEW ORLEANS DISTRICT			
Submitted:	Surveyed By: SPJS	Plotted By: BD	Checked By: AOJH
Recommended:	Chief, Survey Section	Chief, Waterways Maintenance Section	
Approved:			

CALCASIEU SHIP CHANNEL

BAR SHEET 47

CR_47_BAR_20260716_CS

16 July 2026

Sheet
Reference
Number

47 of 53

Revision Number:
5.26.05.21-5.26.05.21

US Army Corps
of Engineers
District: CEMVN

DISCLAIMER

Access/Complaints: The United States Government furnishes these data and the recipient accepts and uses them with the express understanding that the data are not warranted for any particular purpose, expressed, or implied concerning the accuracy, completeness, reliability, usability, or suitability for any particular purpose of the recipient. The user is responsible for the results of any use of the data for other than its intended purpose.

Data: The data are the property of the U.S. Army Corps of Engineers and are not to be distributed or used for any other purpose without the express written permission of the U.S. Army Corps of Engineers. The data are not to be used for any purpose other than that for which they were collected and are not to be used for any purpose other than that for which they were collected.

Liability: The data represent the results of data collection/processing for a specific U.S. Army Corps of Engineers project. The data are not to be used for any purpose other than that for which they were collected and are not to be used for any purpose other than that for which they were collected.

Hydrographical Conditions: The data are not to be used for any purpose other than that for which they were collected and are not to be used for any purpose other than that for which they were collected.