

DISCLAIMER

The data represented on this chart is the result of a collection of data for a specific US Army Corps of Engineers project. It is only valid for the intended use, content, time and accuracy specifications. The user is responsible for the results and any application of the data for other than its intended purpose.

Data Constants: Hydrographic survey data is subject to change rapidly due to several factors including but not limited to changing hydrographic conditions, changes in bathymetry, and changes in the hydrographic conditions which develop after the date of the survey. The user is responsible for the results and any application of the data for other than its intended purpose.

The information depicted on this map represents the results of a survey conducted on the general condition existing at that time.


Submitted:	Surveyed By: CHUSTZ
Recommended:	Plotted By: JHI
Approved:	Checked By: JHI

U.S. ARMY CORPS OF ENGINEERS
NEW ORLEANS DISTRICT

**GULF INTRACOASTAL WATERWAY
HOUMA NAV TO CHENE**

G_56_H2C_20240913_CS_5X5_POSTSTORM

13 September 2024

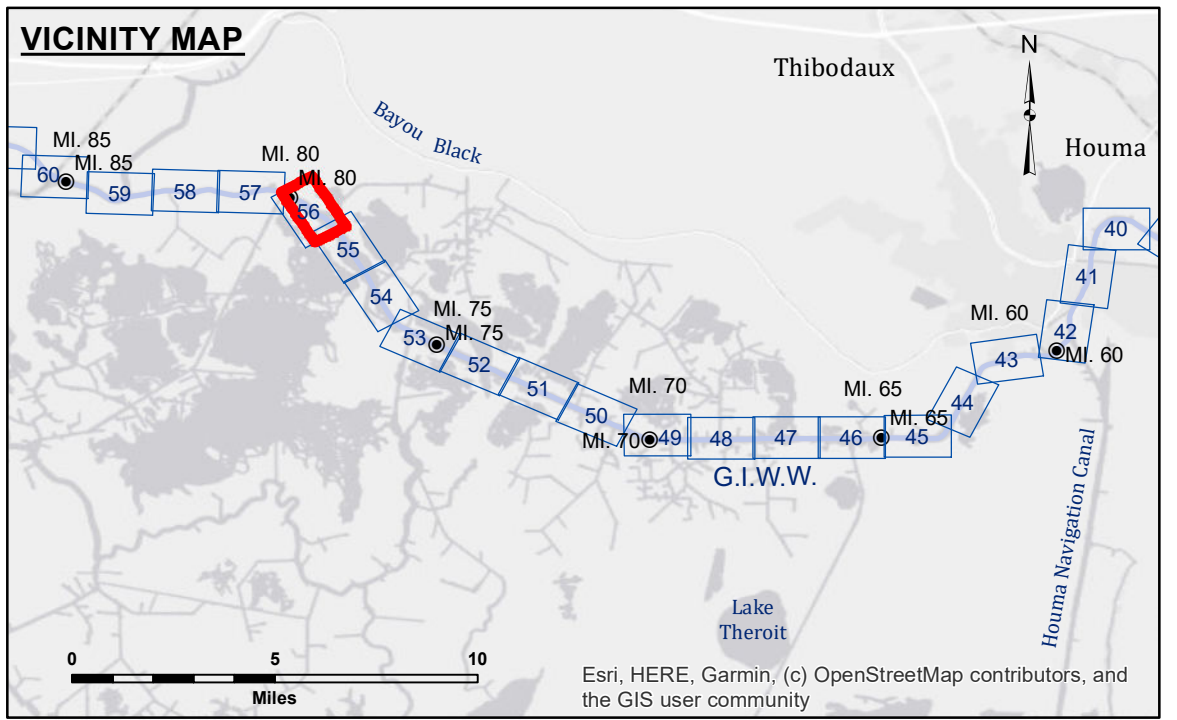

LEGEND

--- Federal Navigation Channel	○ Cable Area	□ Borrow Area	■ -12' and above
— Federal Navigation Center Line	□ Placement Area	● Shoalest Sounding**	□ -12' and below
— As-built Pipeline/Cable	□ Anchorage Area	★ Beacon, General	
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point	◆ Red Navigation Buoy	
— Project Depth Contour	⚓ Wrecks-Submerged	◆ Green Navigation Buoy	

North Arrow

Gage Reading: VRN ADJUSTED TO MLG
 Sea Conditions: CALM
 Vessel Name: CHUSTZ
 Survey Type: CONDITION
 Sounding Frequency***: HIGH

Scale Bar

0 500 1,000 Feet

NOTES:

Horizontal Coordinate System:
North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum:
Soundings are shown in feet and indicate depths below Mean Low Gulf Datum (MLG).

Mile markers on the G.I.W.W. are shown in one mile intervals.

The location of navigation aids are base on and provided by the U.S. Coast Guard.

2017 Aerial Photography data source: NAIP, 1998 DOQQ imagery shown in green from USGS.

Reference is N.O.A.A. Navigation Chart No. 11355.

** Shoalest Sounding per Quarter per Reach.

*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

Sheet Reference Number

56 of 191