


DISCLAIMER
 The information depicted on this map represents the results of a survey conducted by the United States Government. The user is responsible for the accuracy, reliability, usability, or availability of the information for any purpose other than that intended by the United States Government. The user is responsible for the accuracy, reliability, usability, or availability of the information for any purpose other than that intended by the United States Government. The user is responsible for the accuracy, reliability, usability, or availability of the information for any purpose other than that intended by the United States Government. The user is responsible for the accuracy, reliability, usability, or availability of the information for any purpose other than that intended by the United States Government.

Submitted:	Surveyed By: SPPM
Recommended: Chief, Survey Section	Plotted By: BD
Approved: Chief, Waterways Maintenance Section	Checked By: AC


U.S. ARMY CORPS OF ENGINEERS
 NEW ORLEANS DISTRICT

**HOUMA NAVIGATION CANAL
 LOWER CHANNEL
 HN_11_LWR_20170317_CS
 17 March 2017**

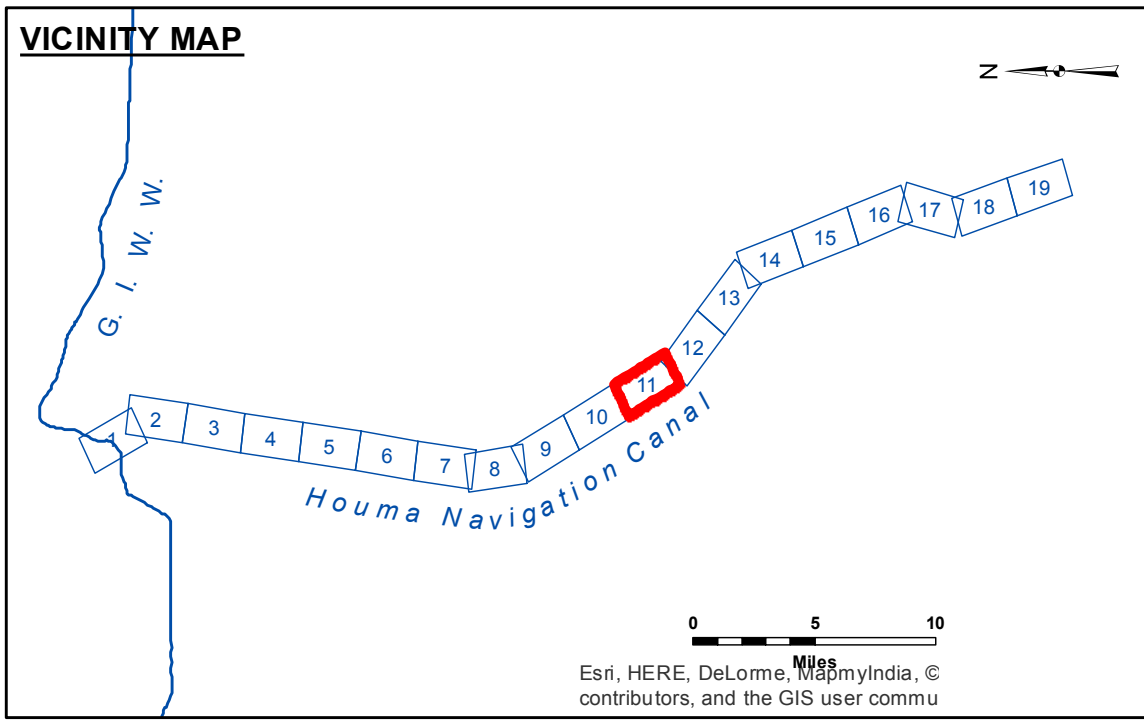

LEGEND

--- Federal Navigation Channel	○ Cable Area	□ Borrow Area	■ -12' and above
— Federal Navigation Center Line	□ Placement Area	● Shoalest Sounding**	■ -12' to -15'
— As-built Pipeline/Cable	□ Anchorage Area	★ Beacon, General	■ -15' to -18'
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point	◆ Red Navigation Buoy	■ -18' and below
— Project Depth Contour	⚓ Wrecks-Submerged	◆ Green Navigation Buoy	

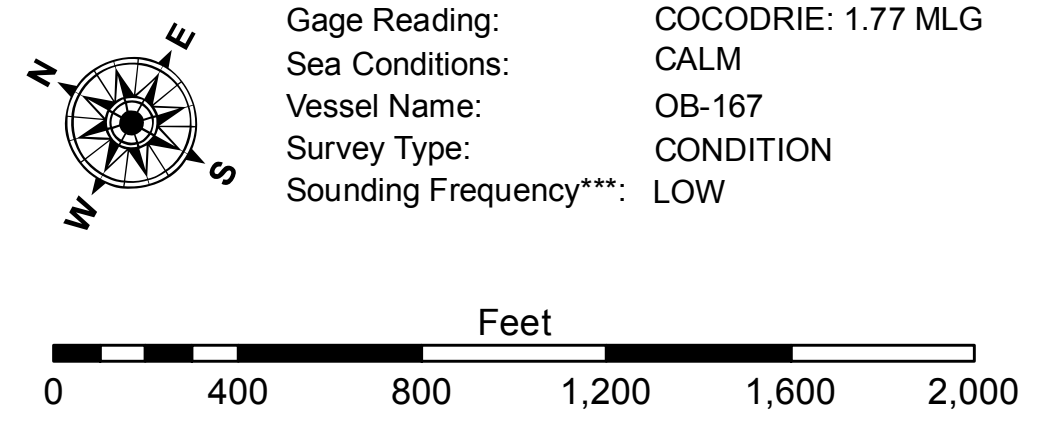

NOTES:
 Horizontal Coordinate System:
 North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.
 Vertical Datum:
 Soundings are shown in feet and indicate depths below Mean Low Gulf Datum (MLG). Datum Relationships for 76305 as of August 2014:
 0.0' NAVD88 (OPUS 2010) = 0.42' MLLW (2007-2011) = 1.34' MLG
 Distances on the Houma Nav. Canal are shown at 1 mile intervals.
 The location of navigation aids are base on and provided by the U.S. Coast Guard and USACE survey crews.
 2010 Aerial Photography data source: NAIP
 Reference is N.O.A.A. Navigation Chart No. 11355.
 ** Shoalest Sounding per Quarter per Reach.
 *** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

**Sheet Reference Number
 11 of 19**

Revision Number:
 3.13-20160811