


**DISCLAIMER**

The information depicted on this map represents the results of a survey conducted by the U.S. Army Corps of Engineers. The user is responsible for the accuracy, completeness, and reliability of the information for its intended use. The user is responsible for the accuracy, completeness, and reliability of the information for its intended use. The user is responsible for the accuracy, completeness, and reliability of the information for its intended use. The user is responsible for the accuracy, completeness, and reliability of the information for its intended use.


Submitted:	Surveyed By:	Plotted By:	Checked By:
Recommended:	SPPM	AO	RL
Chart, Survey Section			
Chief, Waterways Maintenance Section			

**BAYOU LAFOURCHE  
WEST BELLE PASS  
LF\_03\_LWR\_20150514  
14 May 2015**

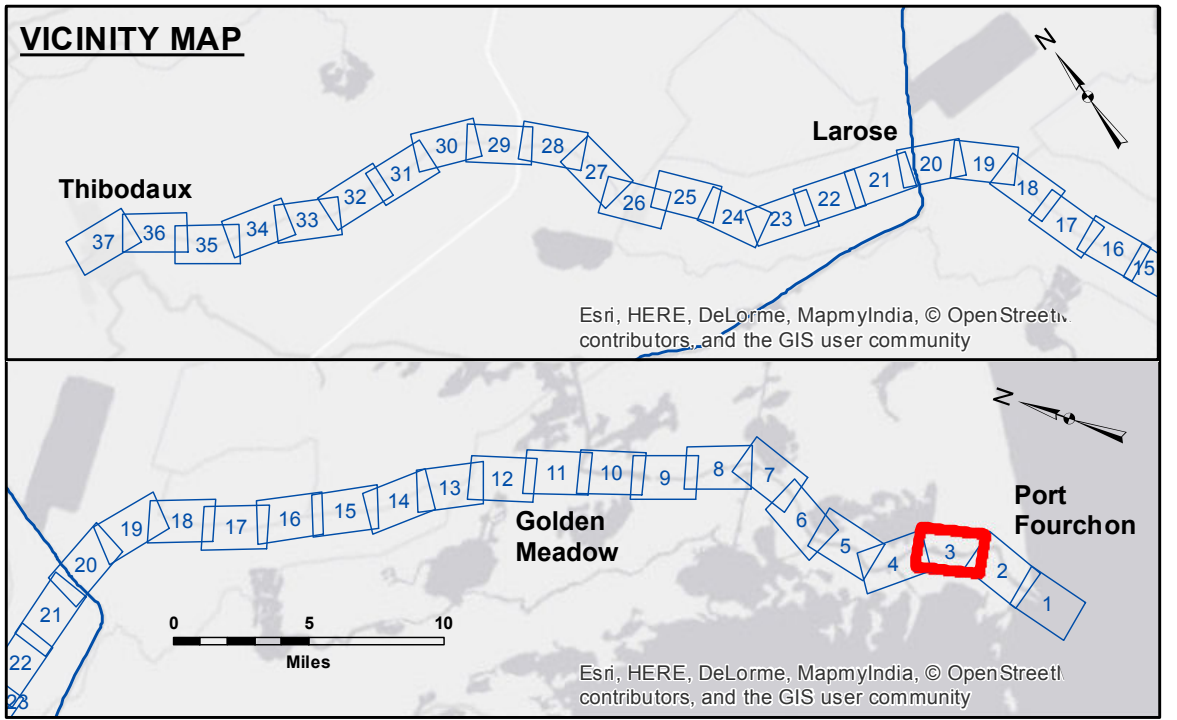

**LEGEND**

--- Federal Navigation Channel	○ Cable Area	□ Borrow Area	■ -16' and above
— Federal Navigation Center Line	□ Placement Area	● Shoalest Sounding**	■ -16' to -24'
— As-built Pipeline/Cable	⊗ Anchorage Area	★ Beacon, General	■ -24' and below
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point	◆ Red Navigation Buoy	
— Project Depth Contour	⊗ Wrecks-Submerged	◆ Green Navigation Buoy	

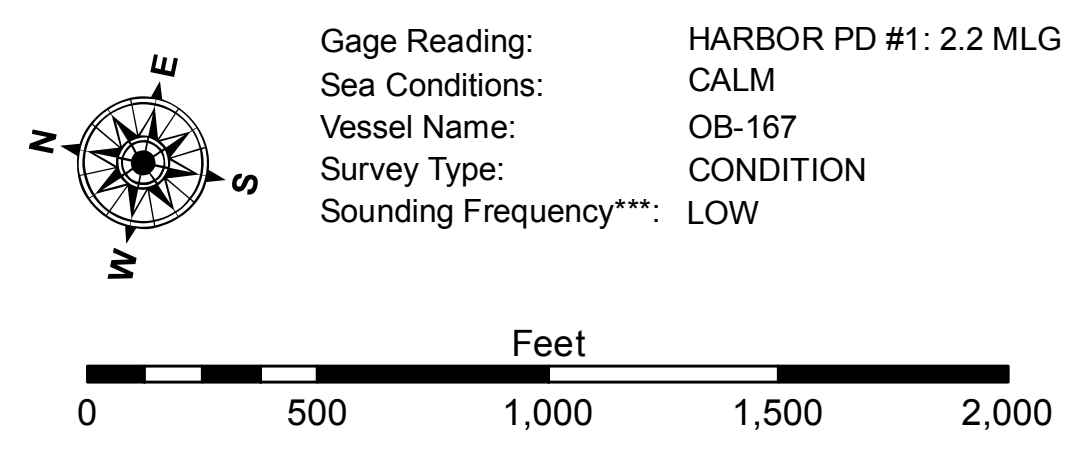

**NOTES:**

Horizontal Coordinate System:  
North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distances in U.S. Survey Feet.

Vertical Datum:  
Soundings are shown in feet and indicate depths below Mean Low Gulf Datum (MLG).  
Datum Relationships for Harbor Police Dock Staff as of August 2014:  
0.0' NAVD88 (OPUS2011) = 0.61' MLLW (1983-2001) = 1.67' MLG

Distances on the Bayou Lafourche are shown at 1 mile intervals.

The location of navigation aids are based on and provided by the U.S. Coast Guard and USACE survey crews.

2013 Aerial Photography data source: GEOCLIP, 1998 DOQQ shown in transparent green.

Reference is N.O.A. Navigation Chart No. 11365 and 11346.

\*\* Shoalest Sounding per Quarter Per Reach.

\*\*\* High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

**Sheet Reference Number  
3 of 37**

Revision Number:  
3.6-1-20140429