

GAGE DESCRIPTION	VERTICAL DATUM	CONVERSION TO MLG
MISS RIVER @ IHNC LOCK DCP# 01340	NAVD83 (2011.85)	ADD (+) 1.85


TABLE OF COORDINATES APPROX LIMITS OF WORK		
POINT	X	Y
1	3694672.343	531637.537
2	3694803.259	531710.755
3	3694156.467	532867.245
4	3694063.970	533616.601
5	3694289.163	534448.693
6	3694300.250	534566.222
7	3694326.374	534662.749
8	3694254.673	534684.907
9	3693974.131	533724.857
10	3693874.386	533356.299
11	3693920.635	532981.621
12	3694737.801	531674.146
13	3694113.710	532790.045
14	3694008.465	533631.623
15	3694290.871	534675.111

CURVE DATA	
CURVE 1 DATA	
EAST EDGE OF CUT	
DELTA:	44° 21' 37.84"
DEGREE OF CURVE:	5° 43' 46.48"
TANGENT:	407.69'
LENGTH OF CURVE:	774.24'
RADIUS:	1000'
CURVE 2 DATA	
C/L	
DELTA:	44° 21' 37.84"
DEGREE OF CURVE:	5° 07' 14.77"
TANGENT:	456.16'
LENGTH OF CURVE:	866.29'
RADIUS:	1118.83'
CURVE 3 DATA	
WEST EDGE OF CUT	
DELTA:	44° 21' 38.05"
DEGREE OF CURVE:	11° 27' 32.96"
TANGENT:	203.85'
LENGTH OF CURVE:	387.12'
RADIUS:	500'


NOTES:
 Distribution Liability: The data represents the results of data collection for a specific US Army Corps of Engineers project and is only valid for its intended use, content, time and accuracy specifications. The user is responsible for the results of the application of the data for other than its intended purpose.
 Data Contents: Hydrographic survey data is subject to change due to several factors including but not limited to emerging hydrographic conditions which develop after the date of the survey. The Army Corps of Engineers does not accept responsibility for changes in the hydrographic conditions when developing after the date of the survey. Project maintainers should not rely solely upon it.
 Access Constraints: The United States Government furnishes these data and the recipient accepts and uses them with the express understanding that the data are not to be used for any purpose other than that for which they were collected, and that the data are not to be used for any purpose other than that for which they were collected, and that the data are not to be used for any purpose other than that for which they were collected.

U.S. ARMY CORPS OF ENGINEERS NEW ORLEANS DISTRICT		
Submitted:	Surveyed By: SURVEY_CREW	Plotted By: BTD
Recommended:	Chief, Survey Section	Checked By: RM
Approved:	Chief, Waterways Maintenance Section	

MISSISSIPPI RIVER DEEP-DRAFT LOCKS
 I.H.N.C. LOCK FOREBAY
 LK_02_IHNC_20151019
 19 October 2015

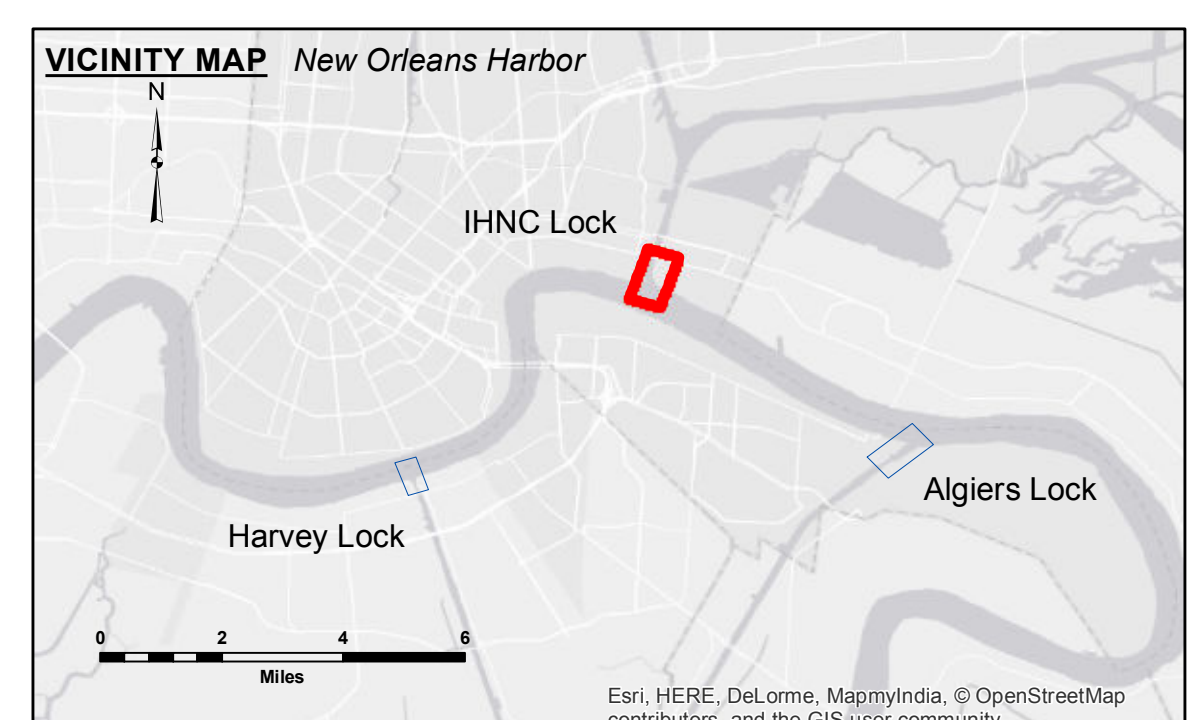

LEGEND			
--- Federal Navigation Channel	○ Cable Area	□ Placement Area	■ -12' and above
— Federal Navigation Center Line	□ Placement Area	● Shoalest Sounding**	■ -12' to -20'
— As-built Pipeline/Cable	□ Anchorage Area	☆ Beacon, General	■ -20' to -25'
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point	◆ Red Navigation Buoy	■ -25' to -32'
— Project Depth Contour	⚓ Wrecks-Submerged	◆ Green Navigation Buoy	■ -32' to -36'
			■ -36' and below

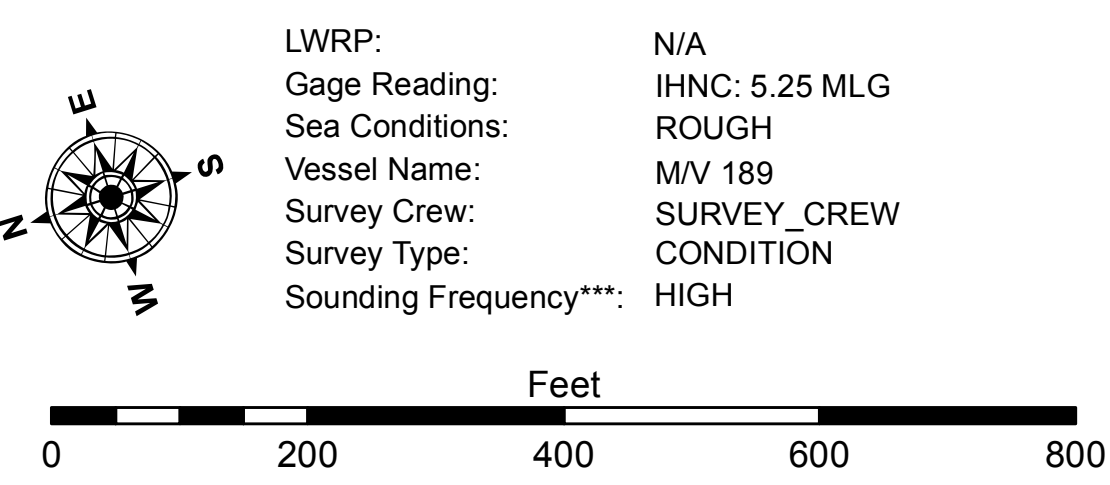

NOTES:
 Horizontal Coordinate System:
 North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.
 Vertical Datum:
 Soundings are shown in feet and indicate depths below Mean Low Gulf (MLG).
 Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.
 The location of navigation aids are based on and provided by the U.S. Coast Guard and USACE crew.
 2010 Aerial Photography data source: NAIP, USDA-FSA-APFO Aerial Photography Field Office.
 Reference is N.O.A. Navigation Chart No. 11370.
 ** Shoalest Sounding per Quarter per Reach.
 *** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

Sheet Reference Number
 2 of 4