


Distribution Liability: The data represents the results of data collection/processing for a specific US Army Corps of Engineers project. It is only valid for its intended use, content, time and accuracy specifications. The user is responsible for the results. The Corps of Engineers does not accept responsibility for changes in the hydrographical conditions when developed after the date of the original survey. Product maintainers should not rely solely upon this information.

| | |
|--------------|--------------------|
| Submitted: | Surveyed By: SP-JS |
| Recommended: | Plotted By: BD |
| Approved: | Checked By: AD/JH |



U.S. ARMY CORPS OF ENGINEERS
NEW ORLEANS DISTRICT

**MISSISSIPPI RIVER - B.R. TO GULF
REDEYE CROSSING
MD_04_RED_20240402_CS
02 April 2024**

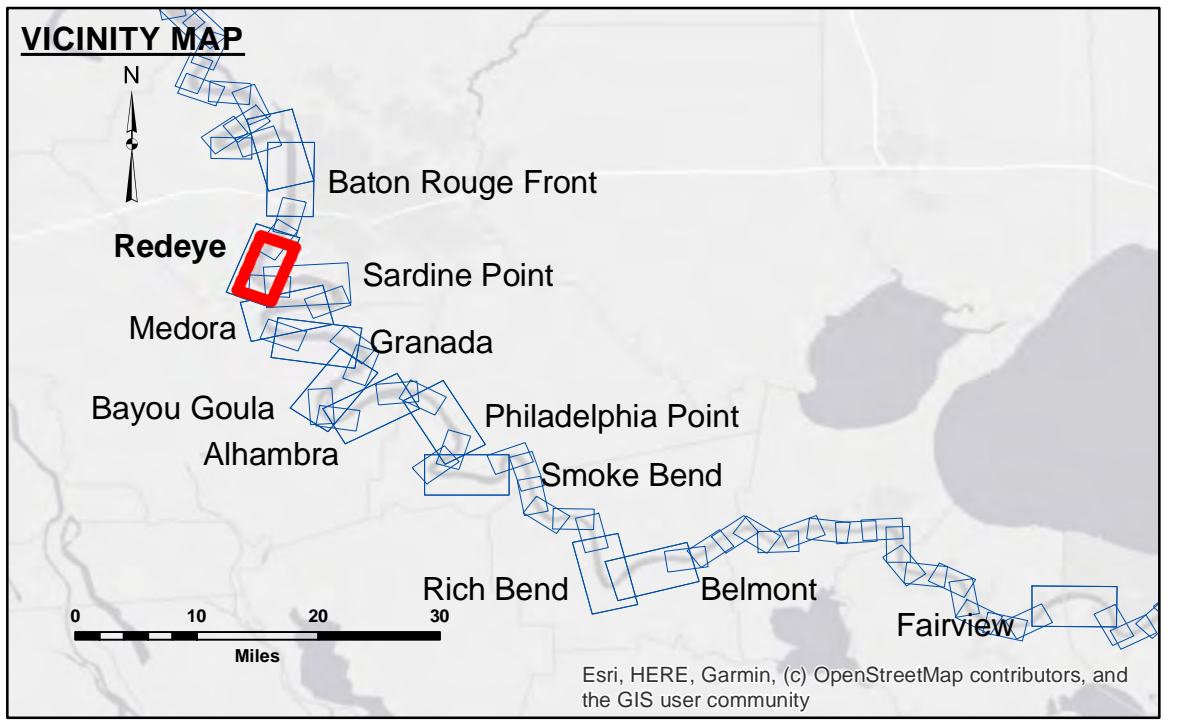

LEGEND

| | | | |
|----------------------------------|---------------------|-------------------------|----------------|
| --- Federal Navigation Channel | ○ Cable Area | □ Borrow Area | 0' and above |
| — Federal Navigation Center Line | ▭ Placement Area | ● Shoalest Sounding** | 0' to -5' |
| — As-built Pipeline/Cable | ⊗ Anchorage Area | ☆ Beacon, General | -5' to -10' |
| ⋯ Unconfirmed Pipeline/Cable | ⊗ Obstruction Point | ◆ Red Navigation Buoy | -10' to -20' |
| — Project Depth Contour | ⚓ Wrecks-Submerged | ◆ Green Navigation Buoy | -20' to -30' |
| | | | -30' to -35' |
| | | | -35' to -40' |
| | | | -40' to 45' |
| | | | -45' and below |

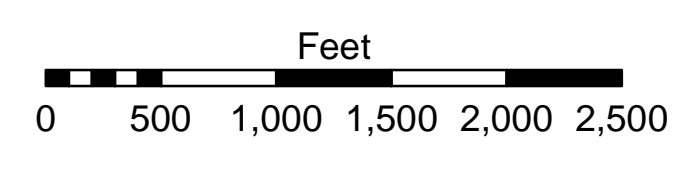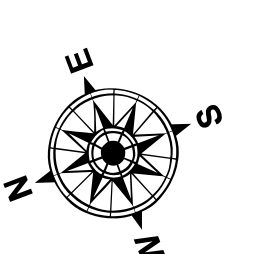

LWRP: 2.4
Gage Reading: BR:22.7 D:14.0 USED:22.0 NAVD
Sea Conditions: CHOPPY
Vessel Name: OB-169
Survey Type: CONDITION
Sounding Frequency***: HIGH

NOTES:
Horizontal Coordinate System:
North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.
Vertical Datum:
Soundings are shown in feet and indicate depths below Low Water Reference Plane 2007 (NAVD).
Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.
The location of navigation aids are based on and provided by the U.S. Coast Guard and USACE crew.
2015 Aerial Photography data source: NAIP, USDA-FSA-APFO Aerial Photography Field Office.
Reference is N.O.A. Navigation Chart No. 11370.
** Shoalest Sounding per Quarter per Reach.
*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

**Sheet Reference Number
4 of 97**

Revision Number:
4.2-3026W-20