
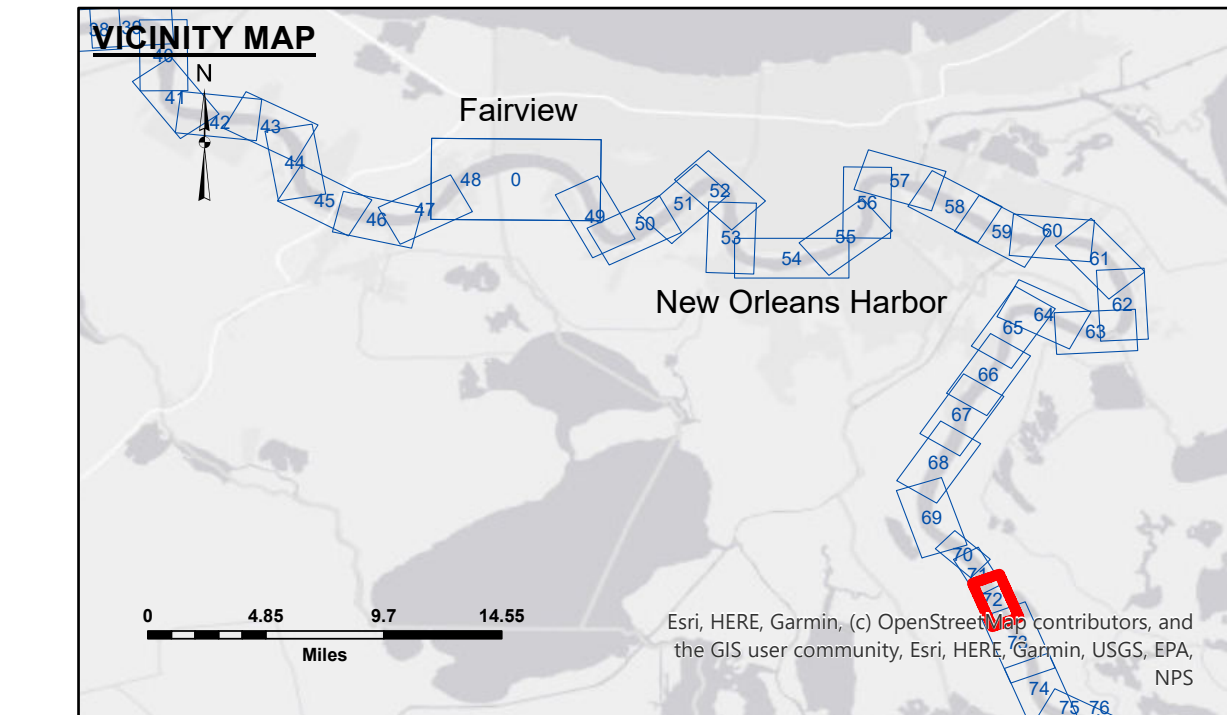


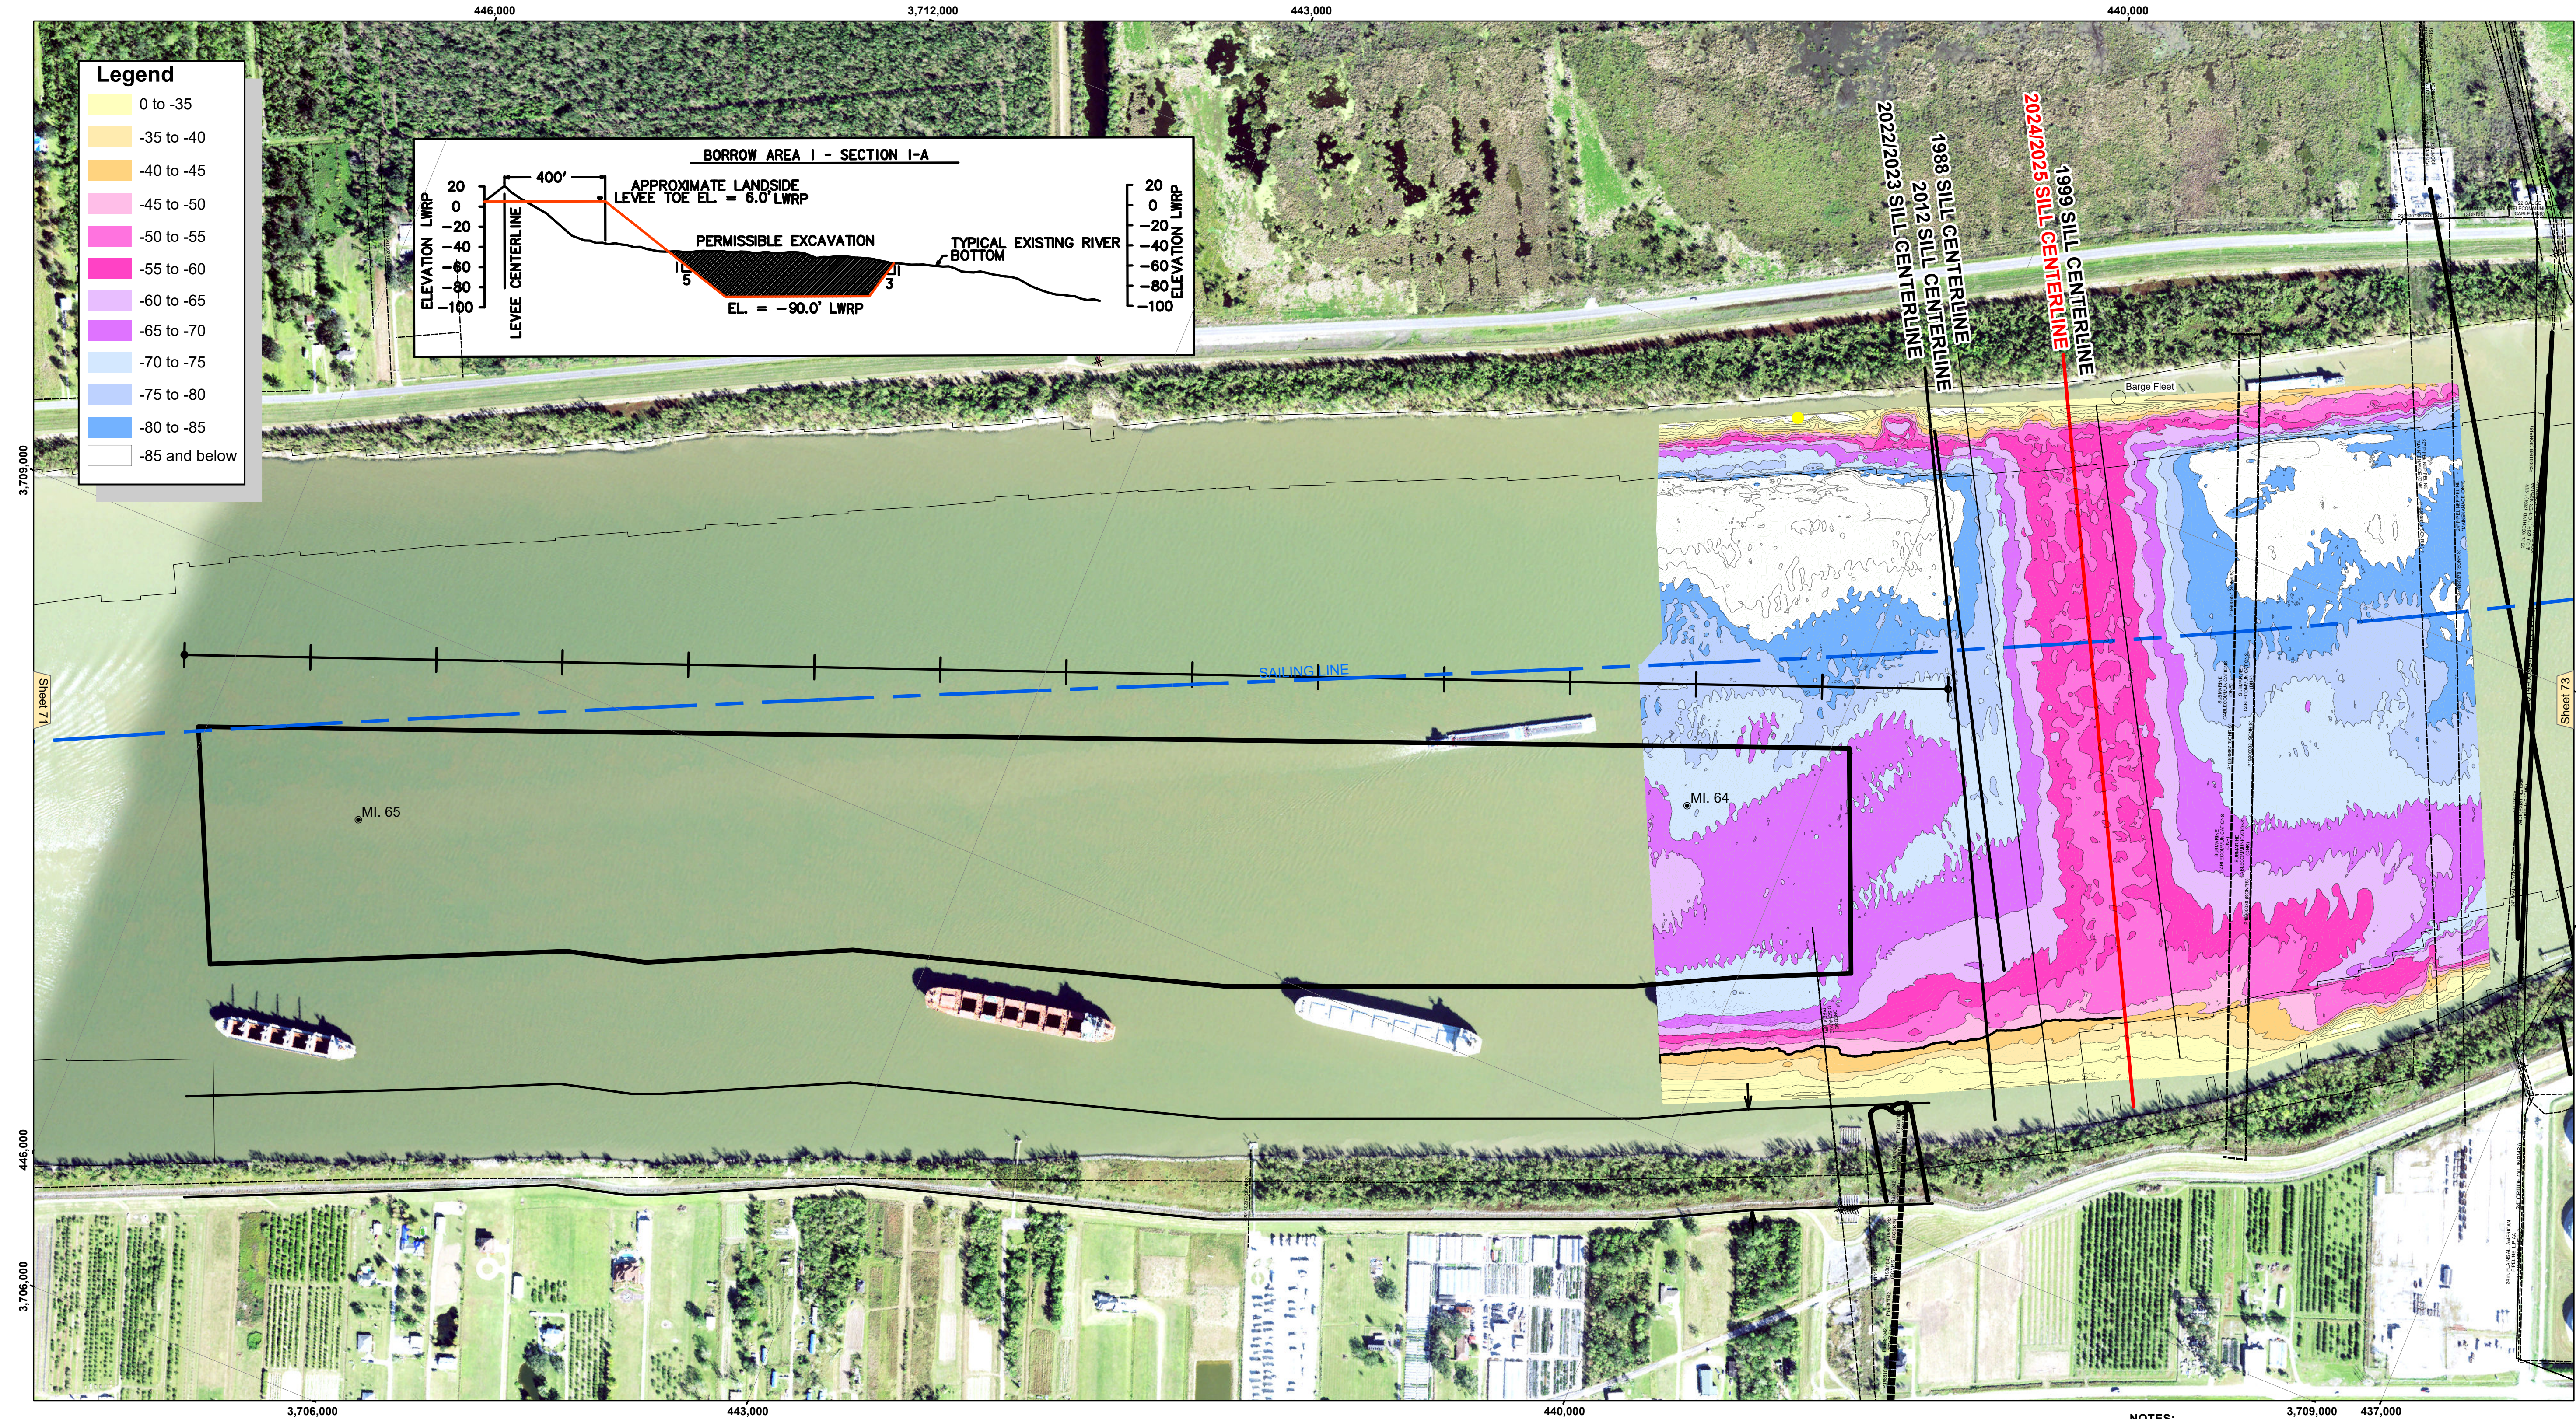

LEGEND		
Federal Navigation Channel	Cable Area	Shoaling Area
Federal Navigation Center Line	Placement Area	Shoalest Sounding**
As-built Pipeline/Cable	Anchorage Area	Beacon, General
Unconfirmed Pipeline/Cable	Obstruction Point	Red Navigation Buoy
Project Depth Contour	Wrecks-Submerged	Green Navigation Buoy

LWRP: 0.4
Gage Reading: ALLIANCE: 0.75 NAVD88 AVG
Sea Conditions: CALM
Vessel Name: OB169
Survey Type: MB
Sounding Frequency***: 400KHZ

Feet

NOTES:

Horizontal Coordinate System:
North American Datum of 1983 (NAD83), projected to the State Plane
Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum:
Soundings are shown in feet and indicate depths below Low Water Reference Plane 2007 (LWRP07).

Datum Relationships for Alliance (0.0' Gage Datum = 0.0' NAVD88 (2009.55) = 0.71' NGVD29 = -0.4' LWRP07)

Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.

The location of navigation aids are base on and provided by the U.S. Coast Guard and USACE crew.

2021 Aerial Photography data source: NAIP, USDA-FSA-APFO Aerial Photography Field Office.

Reference is N.O.A. Navigation Chart No. 11370.

** Shoalest Sounding per Quarter per Reach.

*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

U.S. ARMY CORPS OF ENGINEERS NEW ORLEANS DISTRICT		
Submitted:	Surveyed By: PM, LT	
Recommended: Chief, Survey Section	Plotted By: JH	
Approved: Chief, Waterways Maintenance Section	Checked By: JH	

**MISSISSIPPI RIVER - B.R. TO GULF
SALT WATER BARRIER BORROW 1
MD_72_SB3_20251125_CS_3X3
25 November 2025**

**Sheet
Reference
Number
72 of 97**