


DISCLAIMER: The information depicted on this map represents the results of a survey conducted by the U.S. Army Corps of Engineers. The user is responsible for the accuracy, completeness, reliability, usability or suitability for any particular purpose of the information. The user is responsible for the accuracy, completeness, reliability, usability or suitability for any particular purpose of the information. The user is responsible for the accuracy, completeness, reliability, usability or suitability for any particular purpose of the information. The user is responsible for the accuracy, completeness, reliability, usability or suitability for any particular purpose of the information.

Submitted:	Checked By:
Recommended:	Checked By:
Approved:	Checked By:

MISSISSIPPI RIVER - B.R. TO GULF
MEDORA RECON
MR_08_MED_20170314_CS
14 March 2017

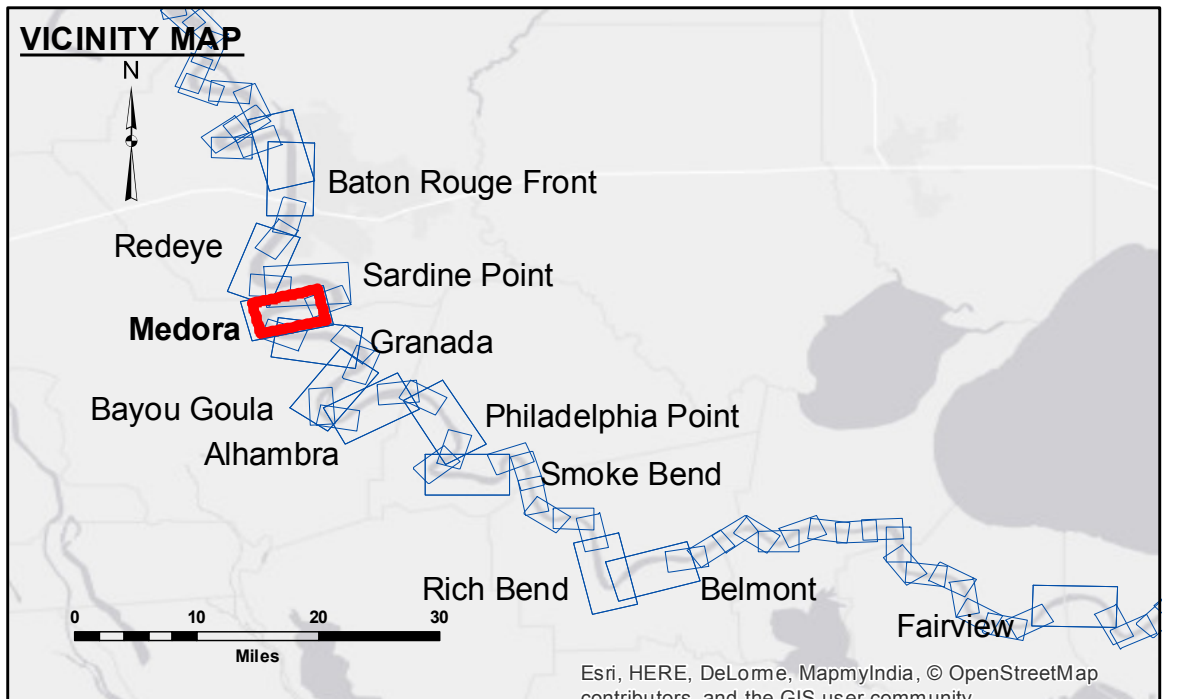

LEGEND		DIKE ELEVATION	
--- Federal Navigation Channel	○ Cable Area	1	-10' NGVD
— Federal Navigation Center Line	□ Placement Area	2	OR -12' LWRP
— As-built Pipeline/Cable	□ Anchorage Area	3	-4' NGVD
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point		OR -4.1' LWRP
— Project Depth Contour	★ Wrecks-Submerged		-2' NGVD
	★ Beacon, General		OR -0.1' LWRP
	◆ Red Navigation Buoy		
	◆ Green Navigation Buoy		
	□ Borrow Area		
	● Shoalest Sounding**		
			0' and above
			0' to -5'
			-5' to -10'
			-10' to -20'
			-20' to -30'
			-30' to -35'
			-35' to -40'
			-40' to -45'
			-45' and below

NOTES:

Horizontal Coordinate System:
 North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum:
 Soundings are shown in feet and indicate depths below Low Water Reference Plane 2007 (NGVD).
 Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.

The location of navigation aids are base on and provided by the U.S. Coast Guard and USACE crew.
 2010 Aerial Photography data source: NAIP, USDA-FSA-APFO Aerial Photography Field Office.

Reference is N.O.A. Navigation Chart No. 11370.
 ** Shoalest Sounding per Quarter per Reach.

*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and bathymeter settings.

LWRP: 2.1
 Gage Reading: BR:23.4 D:14.6 USED:20.7 NGVD
 Sea Conditions: CALM
 Vessel Name: M/V LAFOURCHE
 Survey Type: CONDITION
 Sounding Frequency***: HIGH

Scale: 0 500 1,000 1,500 2,000 2,500 Feet

Sheet Reference Number
8 of 97