



US Army Corps of Engineers
District: CEMVN

DISTRIBUTION STATEMENT A: This data represents the results of data collection/processing by a specific US Army Corps of Engineers activity and is intended for general existing conditions use. Such data is provided "as is" without warranty of any kind. The user accepts responsibility for its use. The United States shall not be liable under no liability whatsoever for any damages resulting from the use of this data. The user is responsible for the results of any use made of this data. The user is responsible for the results of any use made of this data.


DATA CONSTRAINTS: Hydrographic survey data is subject to change rapidly due to several factors including but not limited to dredging, sand boils, subsidence, and scouring processes. The U.S. Army Corps of Engineers does not warrant the accuracy of this data. The user is responsible for the results of any use made of this data.

DISCLAIMER: The United States Government furnishes these data and the recipient accepts and uses them with the express understanding that the U.S. Government makes no warranties, representations, or guarantees as to the quality, accuracy, timeliness, or completeness of these data. The United States shall not be liable under no liability whatsoever for any damages resulting from the use of this data. The user is responsible for the results of any use made of this data. The user is responsible for the results of any use made of this data.

NOTES:
Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.
Vertical Datum: Soundings are shown in feet and indicate depths below Low Water Reference Plane 2007 (NGVD). Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.
The location of navigation aids are base on and provided by the U.S. Coast Guard and USACE crew.
2010 Aerial Photography data source: NAIP, USDA-FSA-APFO Aerial Photography Field Office.
Reference is N.O.A.A. Navigation Chart No. 11370.
** Shoal sounding per Quarter per Reach.
*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

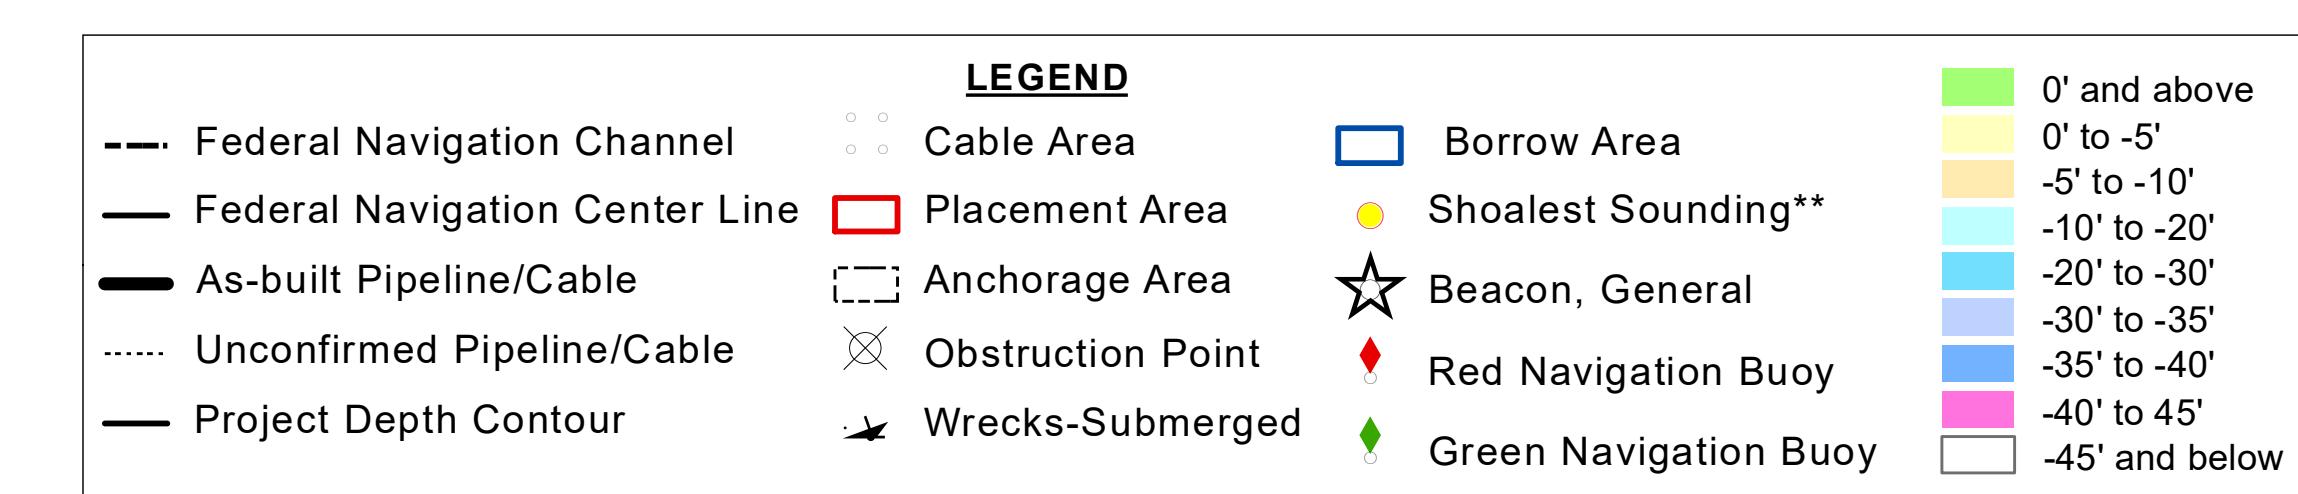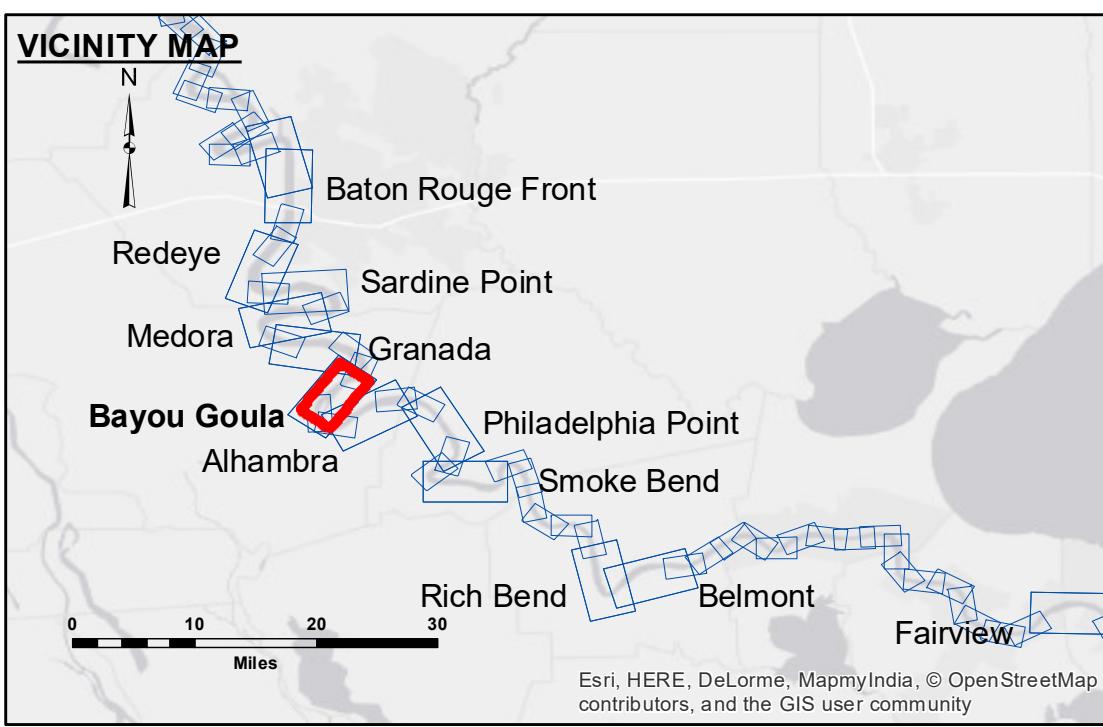

LWRP: 1.8
Gage Reading: BR:7.17 D:4.87 USED:5.9 NGVD
Sea Conditions: CALM
Vessel Name: MV LAFOURCHE
Survey Type: CONDITION
Sounding Frequency***: HIGH

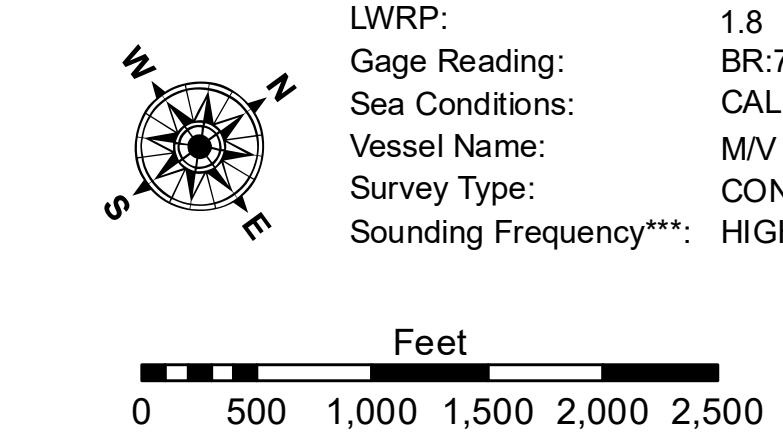

Sheet
Reference
Number
13 of 97

Revision Number:
3.12-20160811

MISSISSIPPI RIVER - B.R. TO GULF
BAYOU GOULA RECON
MR_13_GOU_20171010_CS
10 October 2017