



VICINITY MAP

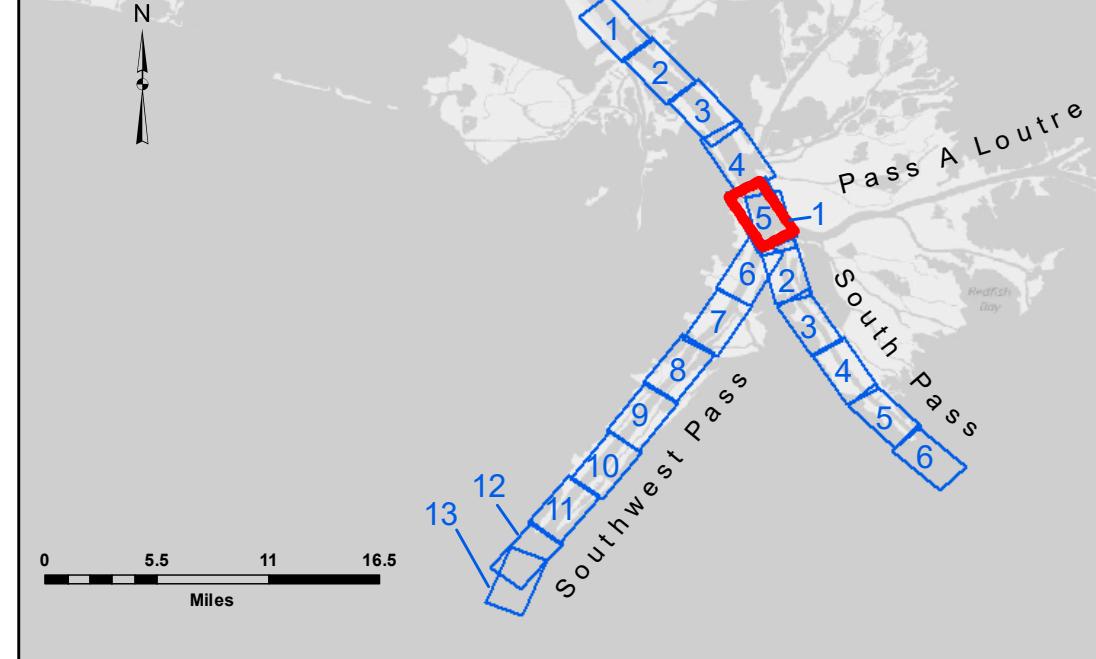



11

- LEGEND**

 - Federal Navigation Channel • • Cable Area
 - Federal Navigation Center Line Placement Area
 - As-built Pipeline/Cable Anchorage Area
 - Unconfirmed Pipeline/Cable Obstruction Point
 - Project Depth Contour ★ Wrecks-Submerg

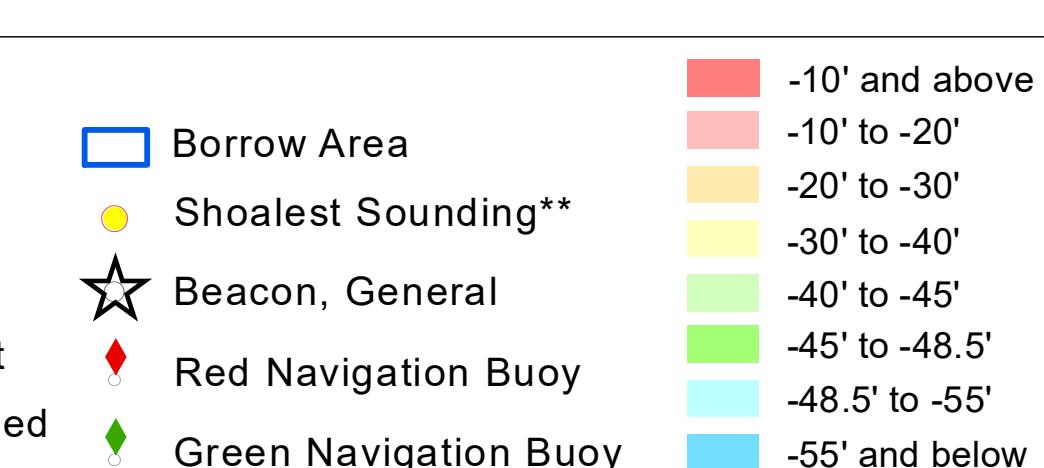

 Gage Reading: 2.20 MLLW @ PILOT TOWN @ 1315 ✓
Sea Conditions: CALM, FLUFF ✓
Vessel Name: BLANCHARD ✓
Survey Type: CONDITION, SB ✓
Sounding Frequency***: LOW ✓

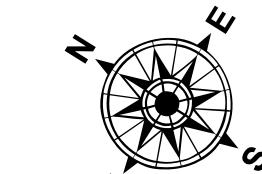

Gage Reading: 2.20 MLLW @ PILOT TOWN @ 13
 Sea Conditions: CALM, FLUFF
 Vessel Name: BLANCHARD
 Survey Type: CONDITION, SB
 Sounding Frequency***: LOW

Feet

0 500 1,000 1,500 2,000 2,500

NOTES:
Horizontal Coordinate System:
North American Datum of 1983 (NAD83), projected to the State Plane
Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum:
Soundings are shown in feet and indicate depths below Mean Lower Low Water (MLLW, 07-11).
Datum Relationships for gage 01525 as of July 2015:
0.0' NAVD88 = -0.3' MLLW = 3.20' MLG

Distances on the Mississippi River, above and below Head of Passes are shown

at 1 mile intervals.

The location of navigation aids are base on and provided by the U.S. Coast Guard.

2016 Aerial Photography data source: Precision Aerial Reconnaissance, LLC (1998 DOQQ in green)

Reference is N.O.A.A. Navigation Chart No. 11361.

** Shoalest Sounding per Quarter per Reach.
*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (24 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

**Sheet
Reference
Number**

Revision Number:
3.12-20160811