



221,000 3,940,000 218,000 3,937,000 215,000 212,000 3,934,000

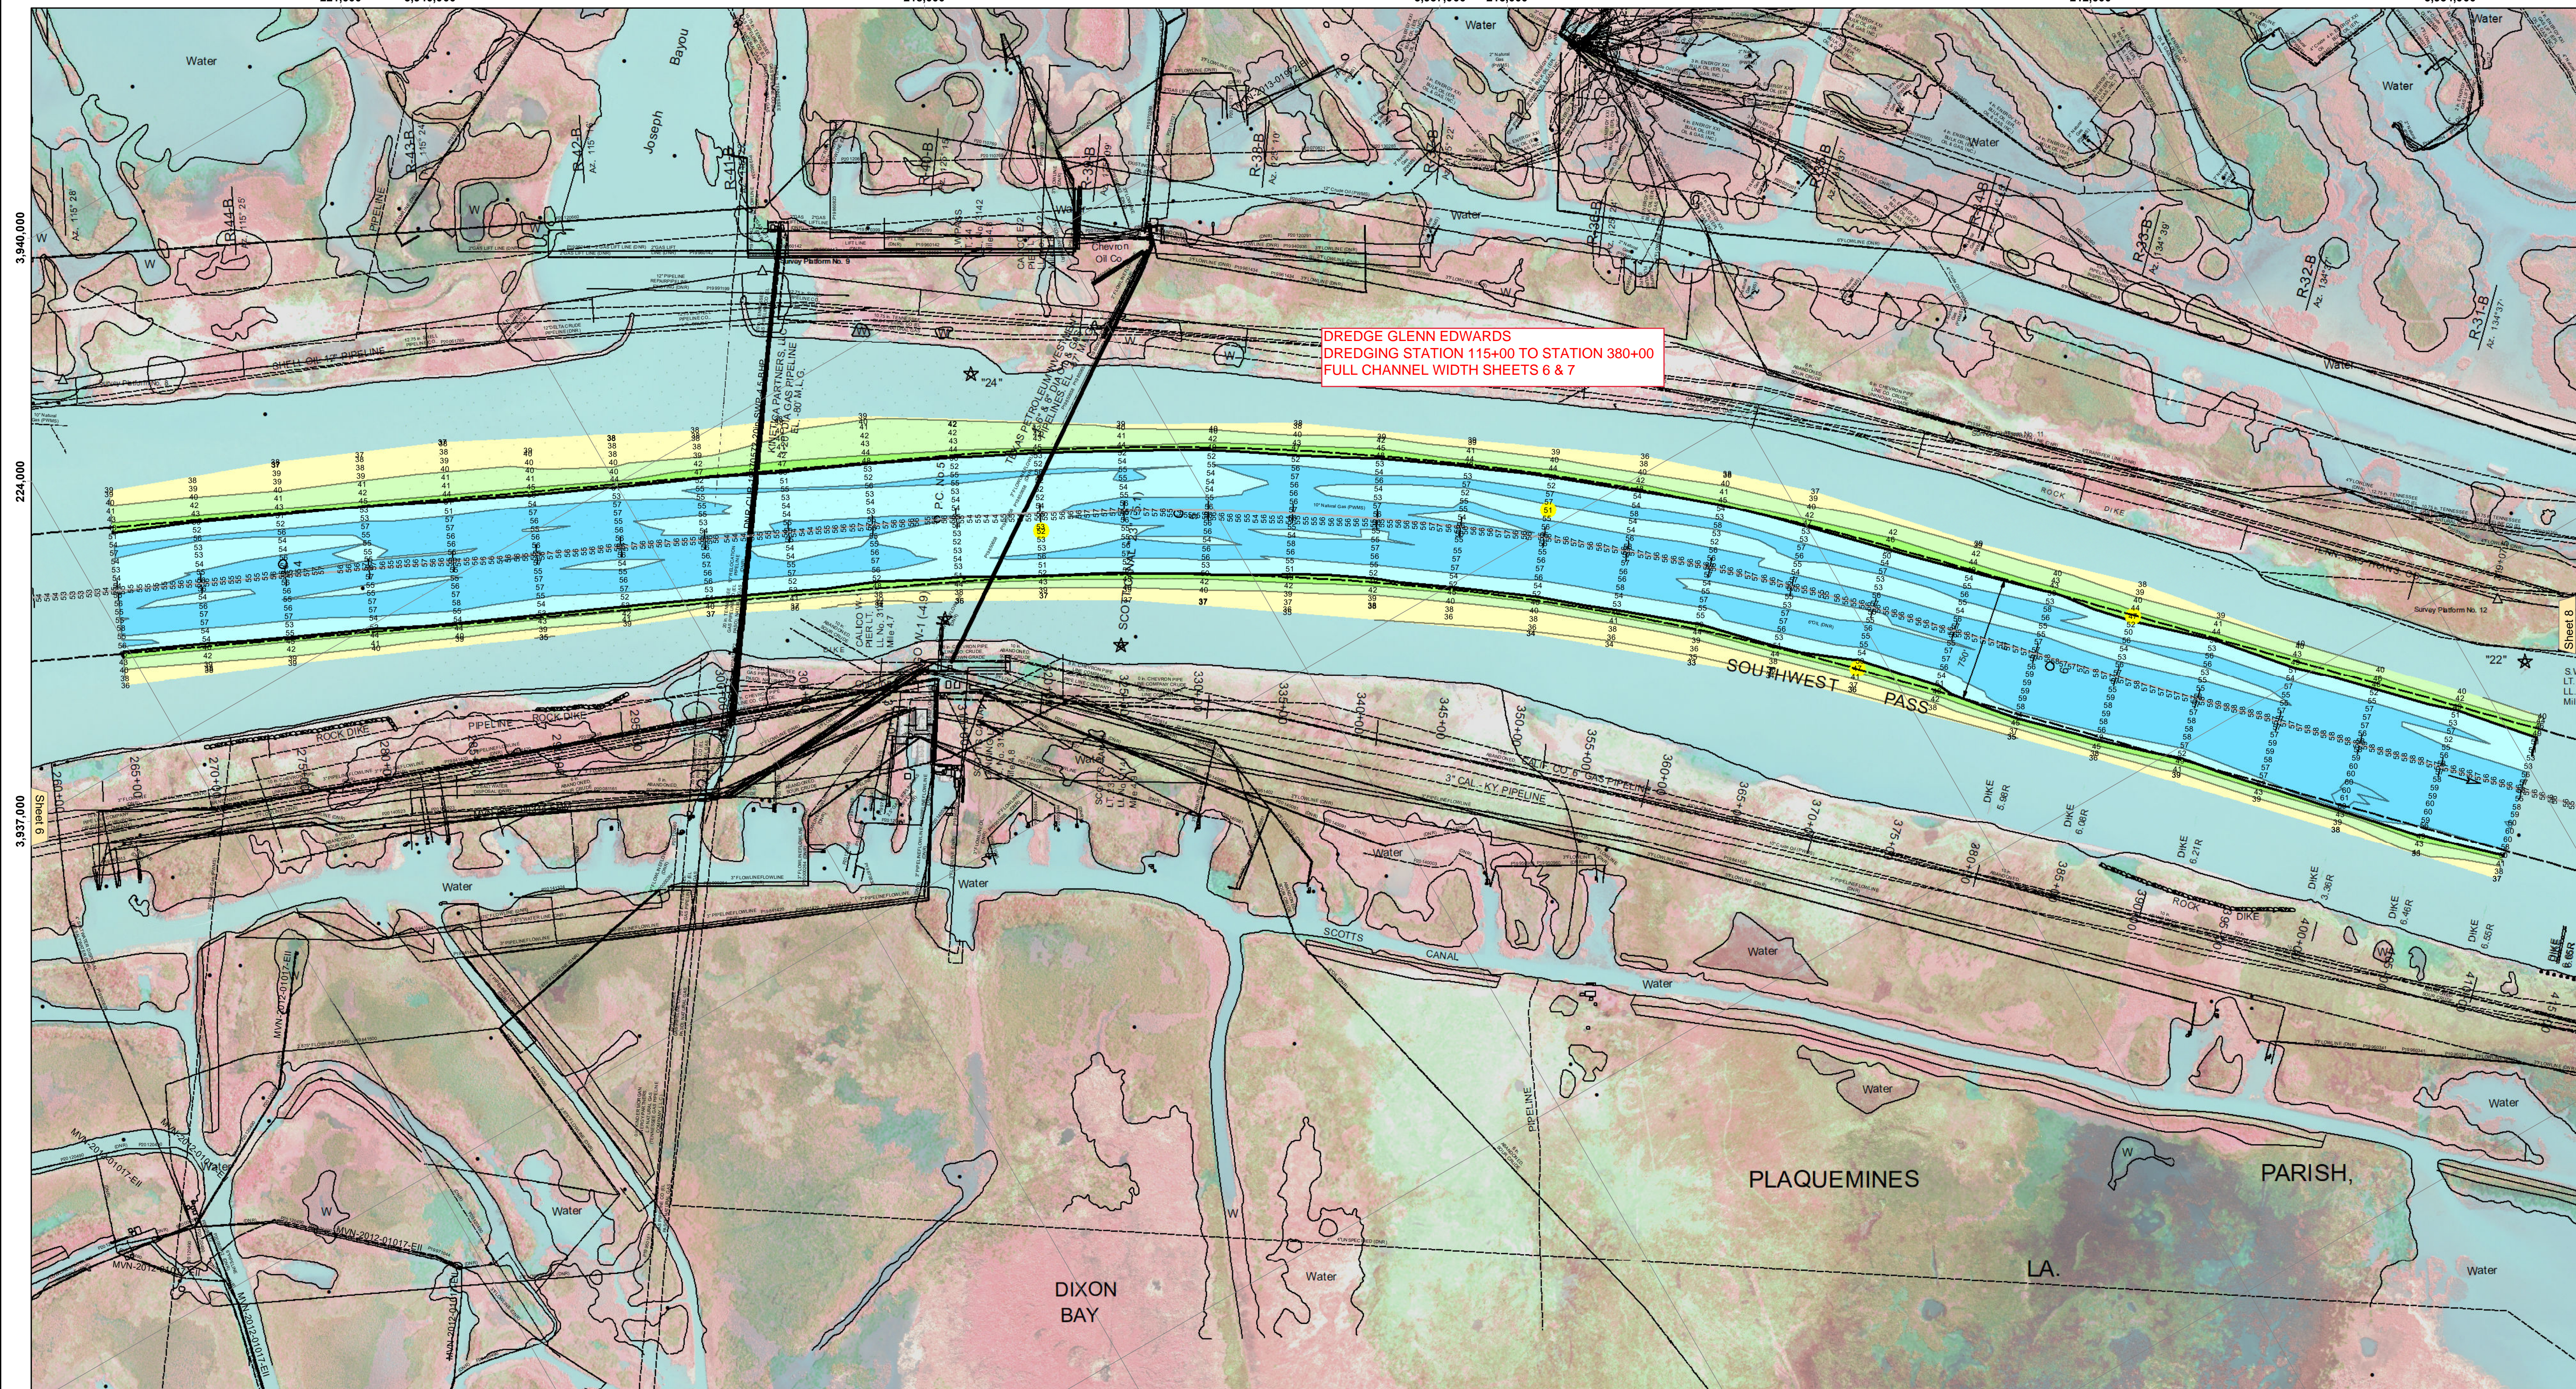


DREDGE GLENN EDWARDS
DREDGING STATION 115+00 TO STATION 380+00
FULL CHANNEL WIDTH SHEETS 6 & 7

Sheet 6


Sheet 6

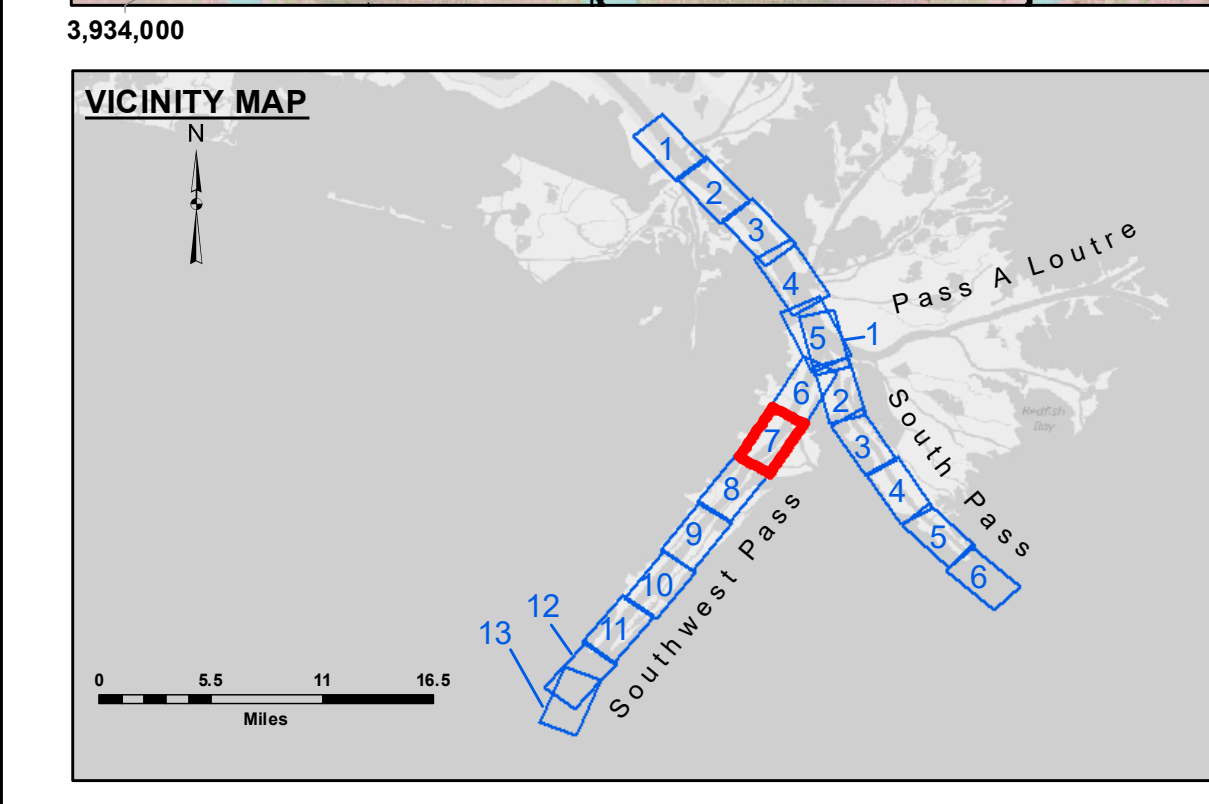

LEGEND			
	Federal Navigation Channel		Placement Area
	Federal Navigation Center Line		Borrow Area
	Unconfirmed Pipeline/Cable		Shoalest Sounding**
	Project Depth Contour		Beacon, General
	Obstruction Point		Red Navigation Buoy
	Wrecks-Submerged		Green Navigation Buoy
	Cable Area		-10' and above
	Anchorage Area		-10' to -20'
	Obstruction Point		-20' to -30'
	Wrecks-Submerged		-30' to -40'
	Wrecks-Submerged		-40' to -45'
	Wrecks-Submerged		-45' to -50'
	Wrecks-Submerged		-50' to -55'
	Wrecks-Submerged		-55' and below



Gage Reading: 2.0 MLLW @ H.O.P. (01545 OD) @ 0900
 Sea Conditions: CALM
 Vessel Name: BLANCHARD
 Survey Type: CONDITION, SB
 Sounding Frequency***: LOW

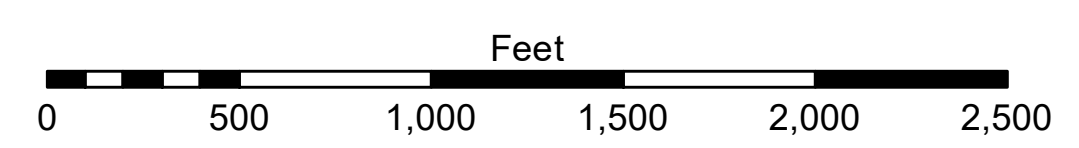

NOTES:
 Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.
 Vertical Datum: Soundings are shown in feet and indicate depths below Mean Lower Low Water (MLLW, 12-16). Datum Relationships for gage 01545 as of March 2020: 0.0' NAVD88, 2009.55 = -0.32' MLLW = 3.18' MLG
 Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.
 The location of navigation aids are base on and provided by the U.S. Coast Guard.
 2022 Aerial Photography data source: Optimal GEO (1998 DOQQ in green)
 Reference is N.O.A. Navigation Chart No. 11361.
 ** Shoalest Sounding per Quarter per Reach.
 *** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (24 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.



DISTRIBUTION LIABILITY: The data represents the results of data collection/processing for a specific US Army Corps of Engineers project. It is only valid for its intended use, content, time and accuracy specifications. The user is responsible for the results and accuracy of the data. Approximation of the data for other than intended purpose.
 Data Constants: Hydrographic survey data is subject to change rapidly due to several factors including but not limited to dredging operations, channel migration, and other factors. The user is responsible for the hydrographical conditions which develop after the date of the survey. Prudent mariners should not rely solely upon it.

U.S. ARMY CORPS OF ENGINEERS NEW ORLEANS DISTRICT		
Submitted:	Surveyed By: JTB & DBD	Plotted By: TSS
Recommended:	Checked By: MSK	Checked By: MSK
Approved:	Chief, Waterways Maintenance Section	

**MISSISSIPPI RIVER - B. R. TO GULF
 SOUTHWEST PASS - SHEET 7
 SW_07_SWP_20240509_CS
 09 May 2024**

**Sheet Reference Number
 7 of 13**

Revision Number:
4.2-202 (04/20)